



## Arteor™ 10 AX switches with indicator


Cat. no(s): 5 720 06/36/37 - 5 721 74/75/76/77 - 5 724 50  
5 725 06/36/37 - 5 730 16/17/18/62  
5 731 16/17/18/34/35/36/37/62



5 720 06 - 5 721 74/75 - 5 725 06



5 720 36 - 5 721 76/77 - 5 725 36






5 730 62 - 5 731 37/62

### 1. USE


General lighting control mechanisms with signalling elements (indicator light or label holder, color).

### 2. RANGE


	Designation	Finishes					Number of modules	Connection method	Characteristics
		White	Magnesium	Red	Soft alu	Champagne			
	Two-way switch with indicator (square)	5 720 06	5 725 06	-	5 721 74	5 721 75	1	with screws	10 AX - 250 VAC
	Two-way switch with indicator (square)	5 720 36	5 725 36	-	5 721 76	5 721 77	2	with screws	10 AX - 250 VAC
	Two-way switch with indicator and label holder (square)	5 720 37	5 725 37	-	-	-	2	with screws	10 AX - 250 VAC
	Two-way switch with red rocker (square)	-	-	5 724 50	-	-	1	with screws	10 AX - 250 VAC
	Two-way switch with indicator (round left)	5 730 16	5 731 16	-	5 731 34	-	1	with screws	10 AX - 250 VAC
	Two-way switch with indicator (round middle)	5 730 17	5 731 17	-	5 731 35	-	1	with screws	10 AX - 250 VAC
	Two-way switch with indicator (round right)	5 730 18	5 731 18	-	5 731 36	-	1	with screws	10 AX - 250 VAC
	Two-way switch with indicator (round)	5 730 62	5 731 62	-	5 731 37	-	2	with screws	10 AX - 250 VAC

### 3. PREPARATION

The mechanisms can be flush-mounted or surface-mounted.

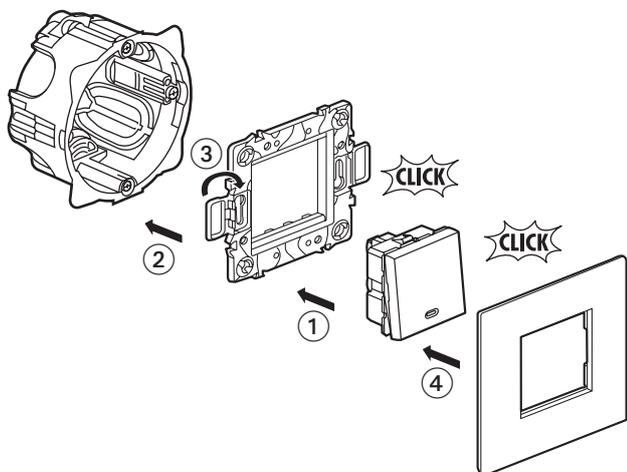


### 4. OVERALL DIMENSIONS

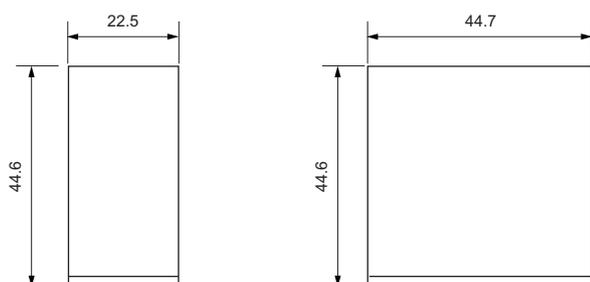

572 006/450/506  
 573 016/017/018/116/117/118

572 036/037/536/537  
 573 062/162

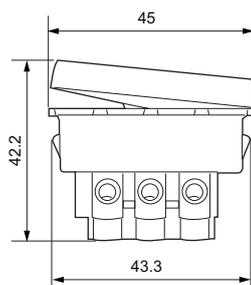

### 5. CONNECTION

Terminal: with screws  
 Capacity: 2 x 2.5 mm<sup>2</sup> or 1 x 4 mm<sup>2</sup>  
 Stripping: 10 mm  
 Screwdriver: 4 mm flat-blade up to 5.5 mm

### 6. OPERATION

Switch mechanism with locator and/or label holder.

### 7. TECHNICAL CHARACTERISTICS

#### 7.1 Mechanical characteristics

Impact tests: IK 04  
 Protection by solid bodies/liquids: IP 40 (mounted)  
 IP 20 (alone)

#### 7.2 Material characteristics

Rocker: Polycarbonate  
 Base: Polycarbonate  
 Basket: Polypropylene

#### 7.3 Electrical characteristics

Voltage: 250 VAC  
 Current: 10 AX  
 Consumption of the indicator light: 0.95 mA  
 Self-extinguishing: 650°C / 30 s

#### 7.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C  
 Operating temperatures: - 5° C to + 50° C

### 8. CLEANING

Surface cleaning with a cloth.  
 Do not use: acetone, tar remover, trichloroethylene.  
 Resistance to the following cleaning agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

**Caution:** Always test before using other special cleaning products.

### 9. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.  
 Refer to e-catalogue.