



Arteor™
6 A Push-button with indicator


Cat. No(s): 5 720 15/16/56 - 5 725 15/16/56
5 730 36/37/38/39/40/41/58/80 - 5 731 80



5 720 16 - 5 725 16



5 720 56 - 5 725 56






5 730 80 - 5 731 80

1. USE


General lighting control mechanisms with signalling elements (indicator, bell).

2. RANGE


	Designation	Finishes				No. of modules	Connection method	Weight (g)	Characteristics
		White	Magnesium	Soft Alu	Champagne				
	One-way push-button bell symbol (square)	5 720 15	5 725 15	5 730 36	5 730 37	1	with screws	21	6 A - 250 VAC
	One-way push-button bell symbol with indicator (square)	5 720 16	5 725 16	5 730 40	5 730 41	1	with screws	19.8	6 A - 250 VAC
	One-way push-button bell symbol (square)	5 720 56	5 725 56	5 730 38	5 730 39	2	with screws	29.2	6 A - 250 VAC
	One-way push-button bell symbol (round)	5 730 80	5 731 80	5 730 58	-	2	with screws	26.5	6 A - 250 VAC

3. PREPARATION

The mechanisms can be flush-mounted or surface-mounted.

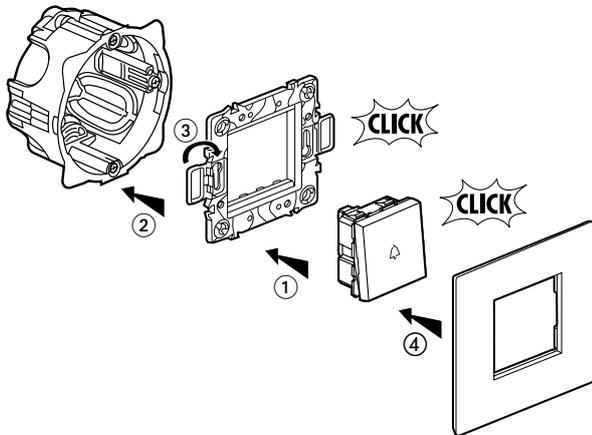


4. OVERALL DIMENSIONS

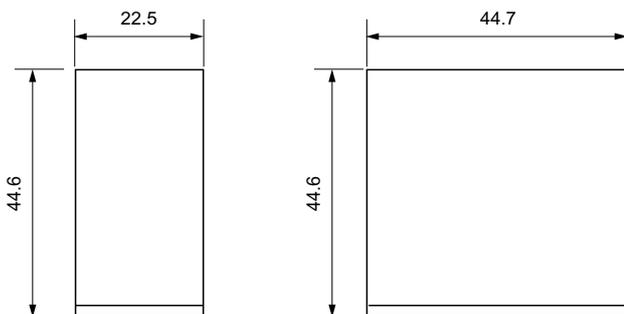

5 720 15/16 - 5 725 15/16
5 730 36/37/40/41

5 720 56 - 5 725 56
5 730 38/39/58/80 - 5 731 80



5. CONNECTION

Terminals: with screws
Capacity: 2 x 2.5 mm² or 1 x 4 mm²
Stripping: 10 mm
Screwdriver: 4 mm flat-blade up to 5.5 mm

6. OPERATION

Push-button mechanism with/without integrated indicator, marking.

7. TECHNICALS CHARACTERISTICS

■ 7.1 Mechanical characteristics

Impact tests: IK 04
Protection by solid bodies / liquids: IP 40 (mounted)
IP 20 (alone)

■ 7.2 Material characteristics

Rocker: Polycarbonate
Base: Polycarbonate
Basket: Polypropylene

■ 7.3 Electrical characteristics

Voltage: 250 VAC
Current: 6 A
Consumption of the indicator light: 0.95 mA
Self-extinguishing: 650° C / 30 s.

■ 7.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

8. CLEANING

Surface cleaning with a cloth
Do not use: acetone, tar remover, trichloroethylene

Resistance to the following cleaning agents: Hexane (EN-60669-1),
Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach 10%,
Glass cleaning substance, Pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

9. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.
Refer to e-catalogue.