


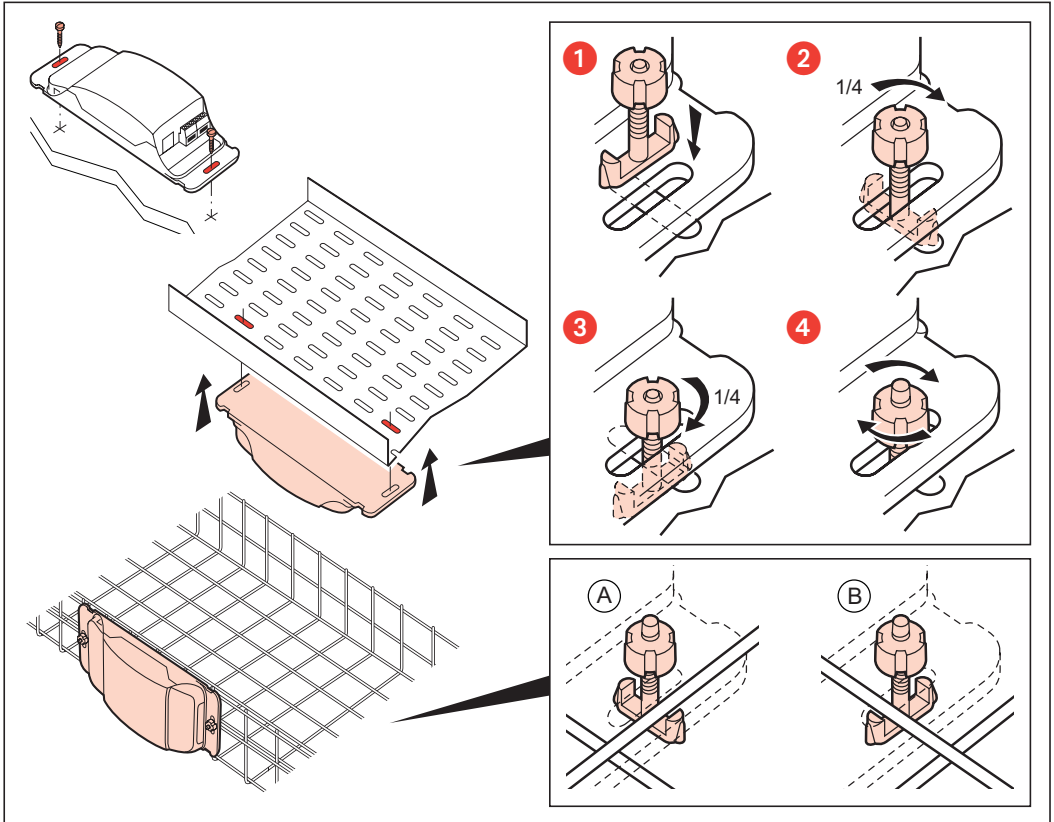
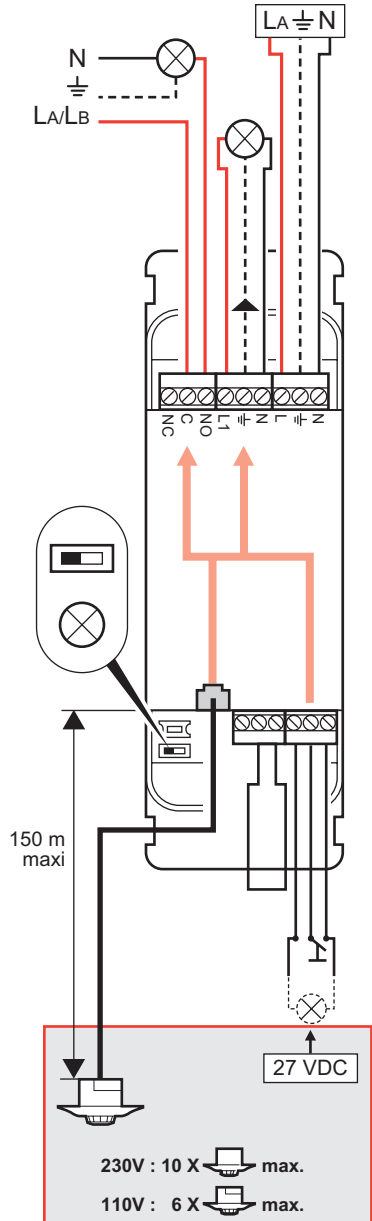
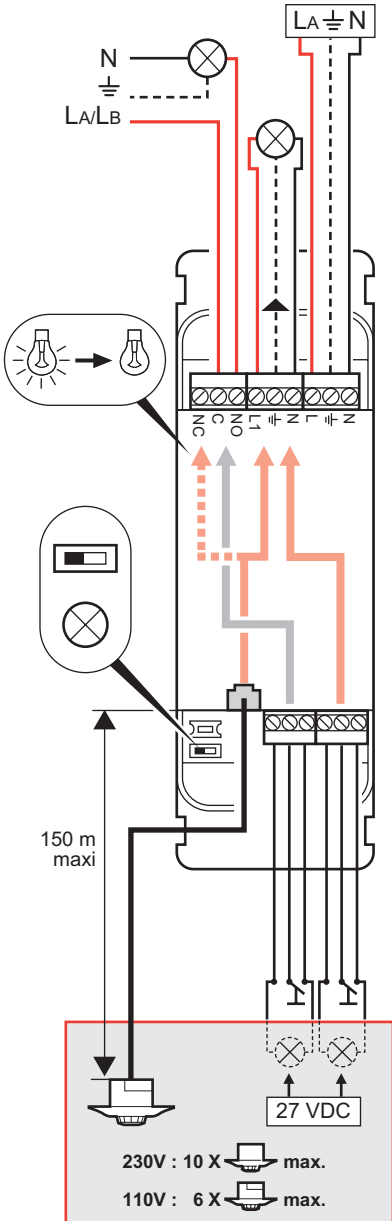
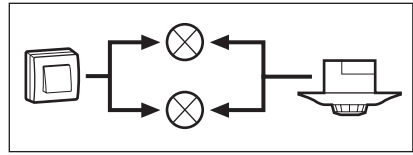





| | |
|--|-------------------------|
| | 100 - 240 V~ |
| | 50 - 60 Hz |
| | 2 x 2,5 mm ² |
| | RJ 45 |
| | NF EN 50428 |

| | | | | | | | | | | | | | | |
|--------|--------|------|---------|-----|---------|-----|------------|-------|--------|-------|--------|-------|------------|-------|
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| 230 V~ | 3680 W | 16 A | 1840 VA | 8 A | 1840 VA | 8 A | 10(2x36 W) | 4,3 A | 500 VA | 2,1 A | 500 VA | 2,1 A | 1 x 500 VA | 2,1 A |
| 110 V~ | 1760 W | | 920 VA | | 920 VA | | 5(2x36 W) | | 250 VA | | 250 VA | | 1 x 250 VA | |

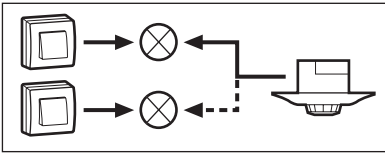

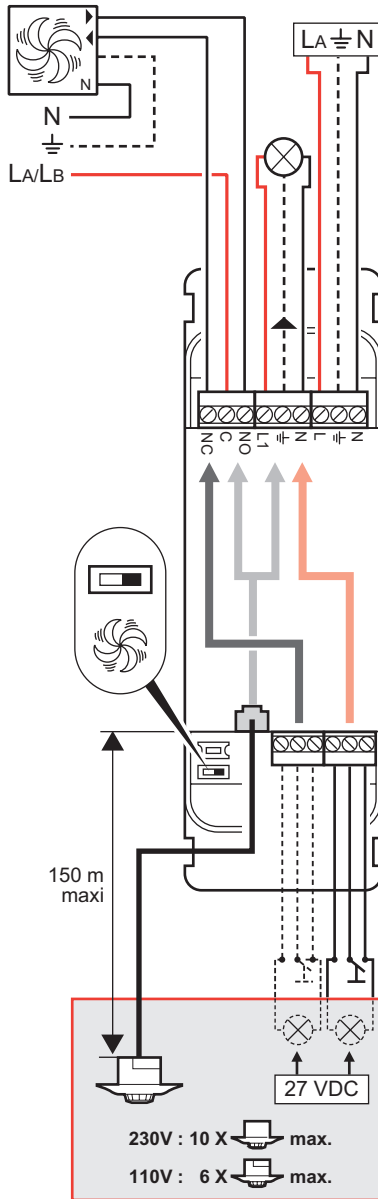

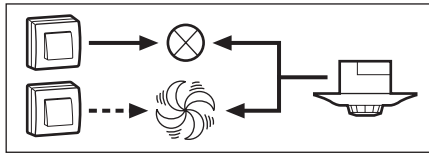

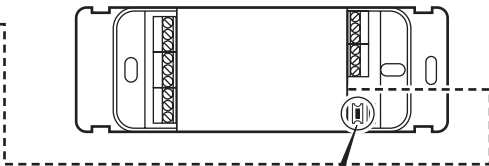

RESET