


IK 04





IP 41



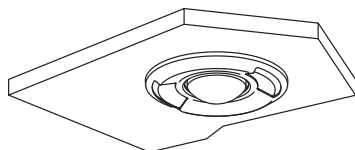



0 484 75

	<ul style="list-style-type: none"> • 100 - 240 V~ • 100 - 240 Volt~
	50 / 60 Hz
	2 x 1.5mm ² / 1 x 2.5mm ²
	7 mm
	-5°C / 30°C
	2000 lux


	Garantie/ Guaranted	Maximun
	16 V 56 mA	16 V 75 mA
	<ul style="list-style-type: none"> • PIR (Passive Infra Red) • IV • IR • PIR (인체감지) 	
	10 s	
	<ul style="list-style-type: none"> • Ø 14 m • Ø 14 meter 	

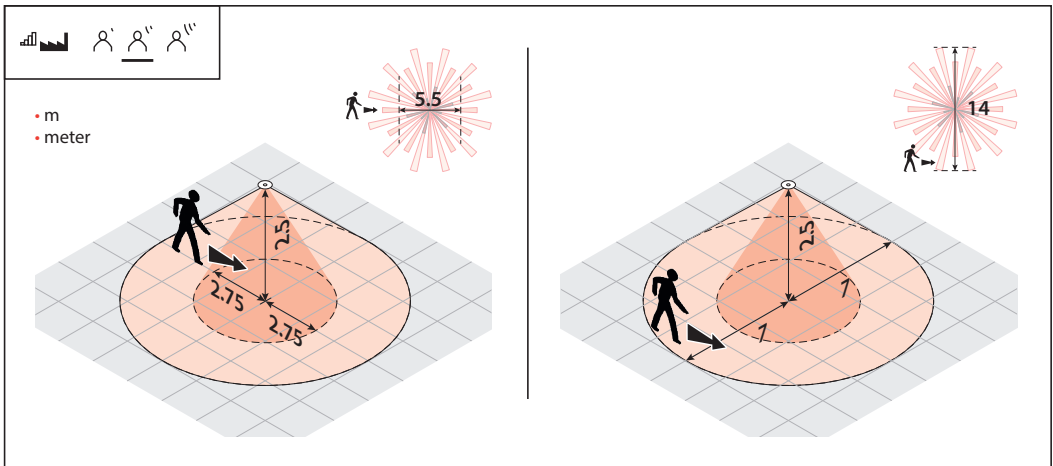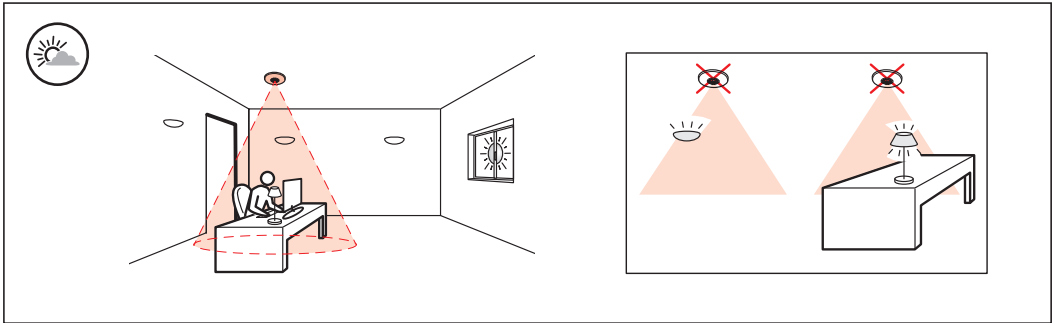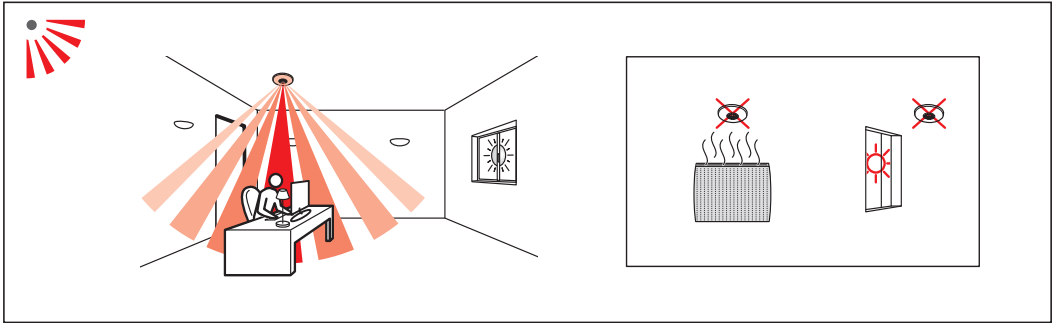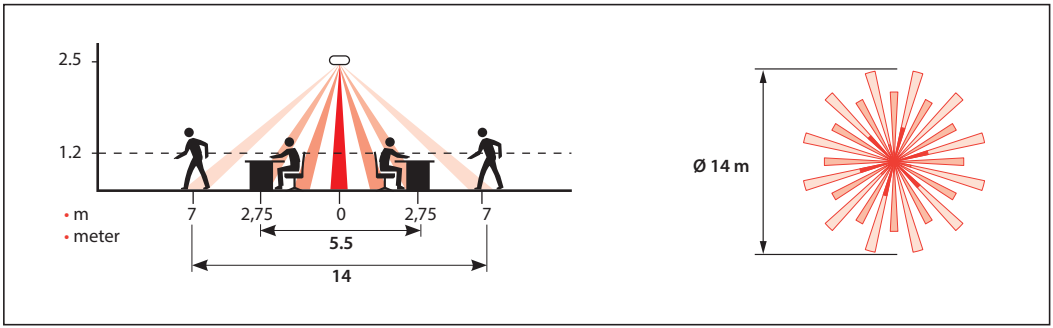

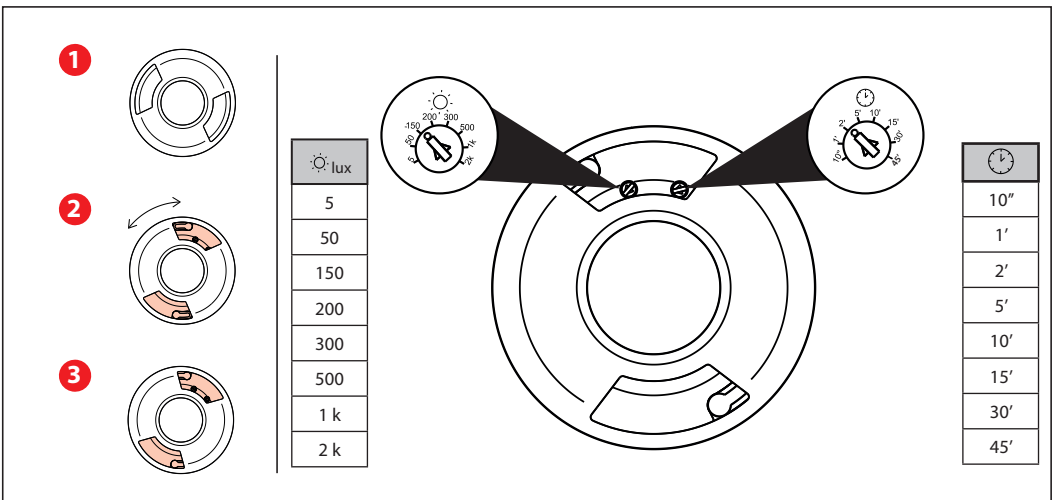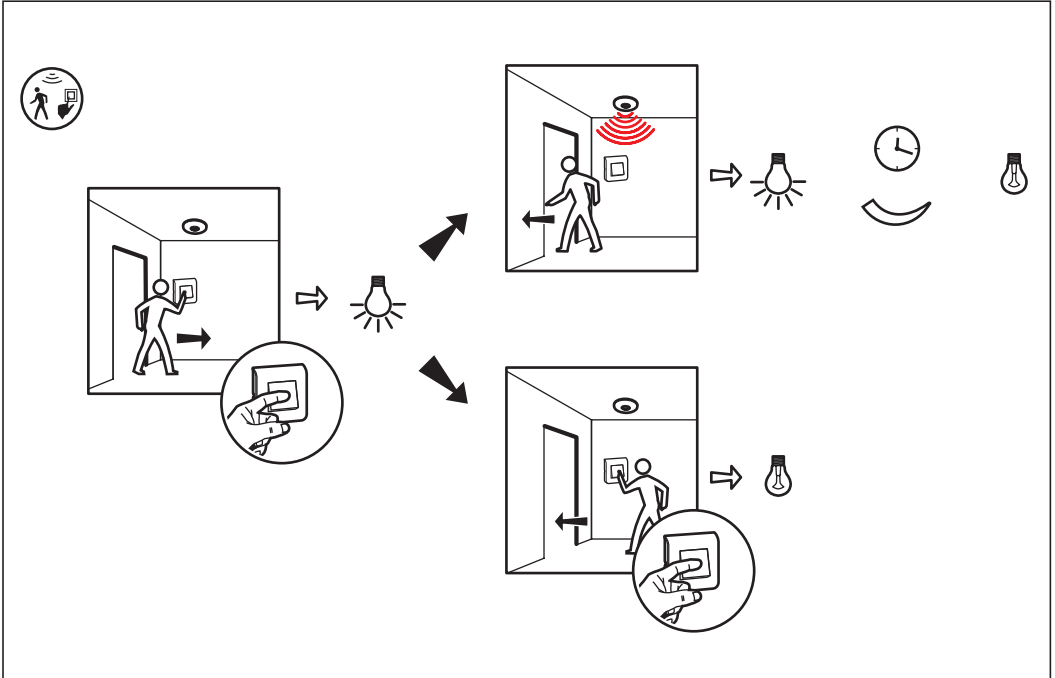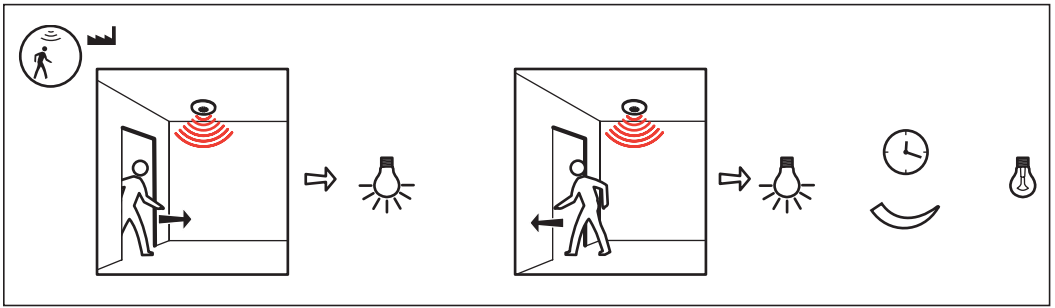

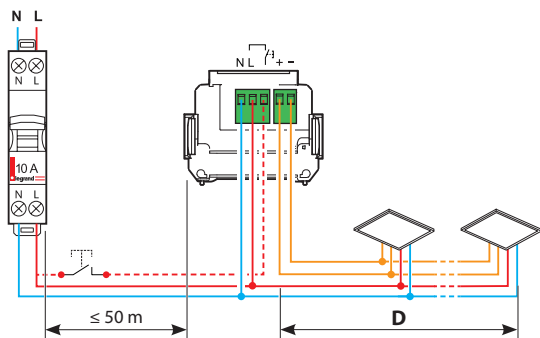

Bus DALI / DALI Bus

D	
≤ 100 m	0.5 mm ²
≤ 150 m	0.75 mm ²
≤ 300 m	1.5 mm ²

