

# Modicon TM5

## Digital I/O Modules

### Hardware Guide

04/2018



EIO0000000444.08

[www.schneider-electric.com](http://www.schneider-electric.com)

**Schneider**  
Electric

---

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein. If you have any suggestions for improvements or amendments or have found errors in this publication, please notify us.

You agree not to reproduce, other than for your own personal, noncommercial use, all or part of this document on any medium whatsoever without permission of Schneider Electric, given in writing. You also agree not to establish any hypertext links to this document or its content. Schneider Electric does not grant any right or license for the personal and noncommercial use of the document or its content, except for a non-exclusive license to consult it on an "as is" basis, at your own risk. All other rights are reserved.

All pertinent state, regional, and local safety regulations must be observed when installing and using this product. For reasons of safety and to help ensure compliance with documented system data, only the manufacturer should perform repairs to components.

When devices are used for applications with technical safety requirements, the relevant instructions must be followed.

Failure to use Schneider Electric software or approved software with our hardware products may result in injury, harm, or improper operating results.

Failure to observe this information can result in injury or equipment damage.

© 2018 Schneider Electric. All Rights Reserved.

---

# Table of Contents

---



	<b>Safety Information</b> . . . . .	7
	<b>About the Book</b> . . . . .	9
<b>Part I</b>	<b>TM5 Digital I/O General Overview</b> . . . . .	15
<b>Chapter 1</b>	<b>TM5 System General Rules for Implementing</b> . . . . .	17
	Installation and Maintenance Requirements . . . . .	18
	Wiring Best Practices . . . . .	21
	TM5 Environmental Characteristics . . . . .	27
	Installation Guidelines . . . . .	29
	Hot Swapping Electronic Modules . . . . .	30
<b>Chapter 2</b>	<b>TM5 Digital I/O General Overview</b> . . . . .	33
	General Description . . . . .	34
	Physical Description . . . . .	36
<b>Part II</b>	<b>TM5 System Digital Input Electronic Modules</b> . . . . .	39
<b>Chapter 3</b>	<b>TM5SDI2D Electronic Module 2DI 24 Vdc Sink 3 Wires</b>	41
	TM5SDI2D Presentation . . . . .	42
	TM5SDI2D Characteristics . . . . .	44
	TM5SDI2D Wiring Diagram . . . . .	46
<b>Chapter 4</b>	<b>TM5SDI4D Electronic Module 4DI 24 Vdc Sink 3 Wires</b>	47
	TM5SDI4D Presentation . . . . .	48
	TM5SDI4D Characteristics . . . . .	50
	TM5SDI4D Wiring Diagram . . . . .	52
<b>Chapter 5</b>	<b>TM5SDI6D Electronic Module 6DI 24 Vdc Sink 2 Wires</b>	53
	TM5SDI6D Presentation . . . . .	54
	TM5SDI6D Characteristics . . . . .	56
	TM5SDI6D Wiring Diagram . . . . .	58
<b>Chapter 6</b>	<b>TM5SDI12D Electronic Module 12DI 24 Vdc Sink 1 Wire</b>	61
	TM5SDI12D Presentation . . . . .	62
	TM5SDI12D Characteristics . . . . .	64
	TM5SDI12D Wiring Diagram . . . . .	66
<b>Chapter 7</b>	<b>TM5SDI16D Electronic Module 16DI 24 Vdc Sink 1 Wire</b>	69
	TM5SDI16D Presentation . . . . .	70
	TM5SDI16D Characteristics . . . . .	72
	TM5SDI16D Wiring Diagram . . . . .	75

<b>Chapter 8</b>	<b>TM5SDI2DF Electronic Module 2DI 24 Vdc Sink 3 Wires</b>	<b>77</b>
	TM5SDI2DF Presentation . . . . .	78
	TM5SDI2DF Characteristics . . . . .	80
	TM5SDI2DF Wiring Diagram . . . . .	83
<b>Chapter 9</b>	<b>TM5SDI2A Electronic Module 2DI 100...240 Vac</b>	
	<b>50/60 Hz 3 Wires</b> . . . . .	<b>85</b>
	TM5SDI2A Presentation . . . . .	86
	TM5SDI2A Characteristics . . . . .	88
	TM5SDI2A Wiring Diagram . . . . .	90
<b>Chapter 10</b>	<b>TM5SDI4A Electronic Module 4DI 100...240 Vac</b>	
	<b>50/60 Hz 2 Wires</b> . . . . .	<b>91</b>
	TM5SDI4A Presentation . . . . .	92
	TM5SDI4A Characteristics . . . . .	94
	TM5SDI4A Wiring Diagram . . . . .	96
<b>Chapter 11</b>	<b>TM5SDI6U Electronic Module 6DI 100...120 Vac</b>	
	<b>50/60 Hz 1 Wire</b> . . . . .	<b>97</b>
	TM5SDI6U Presentation . . . . .	98
	TM5SDI6U Characteristics . . . . .	100
	TM5SDI6U Wiring Diagram . . . . .	102
<b>Part III</b>	<b>TM5 System Digital Output Electronic Modules . . . .</b>	<b>103</b>
<b>Chapter 12</b>	<b>TM5SDO2T Electronic Module 2DO 24 Vdc Tr 0.5 A</b>	
	<b>3 Wires</b> . . . . .	<b>105</b>
	TM5SDO2T Presentation . . . . .	106
	TM5SDO2T Characteristics . . . . .	109
	TM5SDO2T Wiring Diagram . . . . .	112
<b>Chapter 13</b>	<b>TM5SDO4T Electronic Module 4DO 24 Vdc Tr 0.5 A</b>	
	<b>3 Wires</b> . . . . .	<b>115</b>
	TM5SDO4T Presentation . . . . .	116
	TM5SDO4T Characteristics . . . . .	119
	TM5SDO4T Wiring Diagram . . . . .	122
<b>Chapter 14</b>	<b>TM5SDO4TA Electronic Module 4DO 24 Vdc Tr 2 A</b>	
	<b>3 Wires</b> . . . . .	<b>125</b>
	TM5SDO4TA Presentation . . . . .	126
	TM5SDO4TA Characteristics . . . . .	129
	TM5SDO4TA Wiring Diagram . . . . .	132

<b>Chapter 15</b>	<b>TM5SDO6T Electronic Module 6DO 24 Vdc Tr 0.5 A</b>	
	<b>2 Wires</b> . . . . .	<b>135</b>
	TM5SDO6T Presentation . . . . .	<b>136</b>
	TM5SDO6T Characteristics . . . . .	<b>139</b>
	TM5SDO6T Wiring Diagram . . . . .	<b>142</b>
<b>Chapter 16</b>	<b>TM5SDO8TA Electronic Module 8DO 24 Vdc Tr 2 A</b>	
	<b>1 Wire</b> . . . . .	<b>143</b>
	TM5SDO8TA Presentation . . . . .	<b>144</b>
	TM5SDO8TA Characteristics . . . . .	<b>147</b>
	TM5SDO8TA Wiring Diagram . . . . .	<b>151</b>
<b>Chapter 17</b>	<b>TM5SDO12T Electronic Module 12DO 24 Vdc Tr 0.5 A</b>	
	<b>1 Wire</b> . . . . .	<b>153</b>
	TM5SDO12T Presentation . . . . .	<b>154</b>
	TM5SDO12T Characteristics . . . . .	<b>157</b>
	TM5SDO12T Wiring Diagram . . . . .	<b>160</b>
<b>Chapter 18</b>	<b>TM5SDO16T Electronic Module 16DO 24 Vdc Tr 0.5 A</b>	
	<b>1 Wire</b> . . . . .	<b>163</b>
	TM5SDO16T Presentation . . . . .	<b>164</b>
	TM5SDO16T Characteristics . . . . .	<b>166</b>
	TM5SDO16T Wiring Diagram . . . . .	<b>170</b>
<b>Chapter 19</b>	<b>TM5SDO2R Electronic Module 2DO 30 Vdc/230 Vac</b>	
	<b>50/60 Hz 5A Relay C/O</b> . . . . .	<b>173</b>
	TM5SDO2R Presentation . . . . .	<b>174</b>
	TM5SDO2R Characteristics . . . . .	<b>176</b>
	TM5SDO2R Wiring Diagram . . . . .	<b>179</b>
<b>Chapter 20</b>	<b>TM5SDO4R Electronic Module 4DO 30 Vdc/230 Vac</b>	
	<b>50/60 Hz 5 A Relay N/O</b> . . . . .	<b>181</b>
	TM5SDO4R Presentation . . . . .	<b>182</b>
	TM5SDO4R Characteristics . . . . .	<b>184</b>
	TM5SDO4R Wiring Diagram . . . . .	<b>187</b>
<b>Chapter 21</b>	<b>TM5SDO2S Electronic Module 2DO 240 Vac 50/60 Hz</b>	
	<b>Triac 1 A 3 Wires</b> . . . . .	<b>189</b>
	TM5SDO2S Presentation . . . . .	<b>190</b>
	TM5SDO2S Characteristics . . . . .	<b>192</b>
	TM5SDO2S Wiring Diagram . . . . .	<b>194</b>

---

<b>Part IV</b>	<b>TM5 System Digital Mixed Input/Output</b> . . . . .	<b>197</b>
<b>Chapter 22</b>	<b>TM5SDM8DTS Electronic Module 4DI/4DO 24 Vdc Tr</b>	
	<b>0.1 A 1 Wire</b> . . . . .	<b>199</b>
	TM5SDM8DTS Presentation . . . . .	<b>200</b>
	TM5SDM8DTS Characteristics . . . . .	<b>203</b>
	TM5SDM8DTS Wiring Diagram . . . . .	<b>207</b>
<b>Chapter 23</b>	<b>TM5SDM12DT Electronic Module 8DI/4DO 24 Vdc Tr</b>	
	<b>0.5 A 1 Wire</b> . . . . .	<b>209</b>
	TM5SDM12DT Presentation . . . . .	<b>210</b>
	TM5SDM12DT Characteristics . . . . .	<b>213</b>
	TM5SDM12DT Wiring Diagram . . . . .	<b>217</b>
<b>Chapter 24</b>	<b>TM5SMM6D2L Electronic Module 4DI/2DO 24Vdc</b>	
	<b>Tr 0.5A / 1AI/1AO <math>\pm</math>10V/0-20mA 12 Bits</b> . . . . .	<b>221</b>
	TM5SMM6D2L Presentation . . . . .	<b>222</b>
	TM5SMM6D2L Characteristics . . . . .	<b>225</b>
	TM5SMM6D2L Wiring Diagram . . . . .	<b>230</b>
<b>Glossary</b>	. . . . .	<b>233</b>
<b>Index</b>	. . . . .	<b>239</b>

---

# Safety Information

---



## Important Information

### NOTICE

Read these instructions carefully, and look at the equipment to become familiar with the device before trying to install, operate, service, or maintain it. The following special messages may appear throughout this documentation or on the equipment to warn of potential hazards or to call attention to information that clarifies or simplifies a procedure.



The addition of this symbol to a “Danger” or “Warning” safety label indicates that an electrical hazard exists which will result in personal injury if the instructions are not followed.



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

## **DANGER**

**DANGER** indicates a hazardous situation which, if not avoided, **will result in death** or serious injury.

## **WARNING**

**WARNING** indicates a hazardous situation which, if not avoided, **could result in death** or serious injury.

## **CAUTION**

**CAUTION** indicates a hazardous situation which, if not avoided, **could result** in minor or moderate injury.

## **NOTICE**

**NOTICE** is used to address practices not related to physical injury.

---

## PLEASE NOTE

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

A qualified person is one who has skills and knowledge related to the construction and operation of electrical equipment and its installation, and has received safety training to recognize and avoid the hazards involved.

---

# About the Book

---



## At a Glance

### Document Scope

This manual describes the hardware implementation of the Modicon TM5 Digital I/O Modules. It provides part descriptions, specifications, wiring diagrams, installation and setup for Modicon TM5 Digital I/O Modules.

### Validity Note

This document has been updated for the release of SoMachine Motion V4.4 SP1.

The technical characteristics of the devices described in the present document also appear online. To access the information online:

Step	Action
1	Go to the Schneider Electric home page <a href="http://www.schneider-electric.com">www.schneider-electric.com</a> .
2	In the <b>Search</b> box type the reference of a product or the name of a product range. <ul style="list-style-type: none"><li>• Do not include blank spaces in the reference or product range.</li><li>• To get information on grouping similar modules, use asterisks ( * ).</li></ul>
3	If you entered a reference, go to the <b>Product Datasheets</b> search results and click on the reference that interests you. If you entered the name of a product range, go to the <b>Product Ranges</b> search results and click on the product range that interests you.
4	If more than one reference appears in the <b>Products</b> search results, click on the reference that interests you.
5	Depending on the size of your screen, you may need to scroll down to see the data sheet.
6	To save or print a data sheet as a .pdf file, click <b>Download XXX product datasheet</b> .

The characteristics that are presented in the present document should be the same as those characteristics that appear online. In line with our policy of constant improvement, we may revise content over time to improve clarity and accuracy. If you see a difference between the document and online information, use the online information as your reference.

For product compliance and environmental information (RoHS, REACH, PEP, EOLI, etc.), go to [www.schneider-electric.com/green-premium](http://www.schneider-electric.com/green-premium).

## Related Documents

Title of Documentation	Reference Number
Modicon TM5 Expansion Modules Configuration Programming Guide	EIO0000000420 (Eng), EIO0000000421 (Fre), EIO0000000422 (Ger), EIO0000000423 (Spa), EIO0000000424 (Ita), EIO0000000425 (Chs)
Modicon Flexible TM5 / TM7 System - System Planning and Installation Guide	EIO0000000426 (Eng), EIO0000000427 (Fre), EIO0000000428 (Ger), EIO0000000429 (Spa), EIO0000000430 (Ita), EIO0000000431 (Chs)
TM5SDM8DTS Parameter Description	EIO0000002228 (Eng), EIO0000002229 (Ger)
TM5 DIO Modules Instruction Sheet	BBV56045
TM5SDM8DTS Instruction Sheet	NHA86363

You can download these technical publications and other technical information from our website at <https://www.schneider-electric.com/en/download>

## Product Related Information


DANGER

**HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**

- Disconnect all power from all equipment including connected devices prior to removing any covers or doors, or installing or removing any accessories, hardware, cables, or wires except under the specific conditions specified in the appropriate hardware guide for this equipment.
- Always use a properly rated voltage sensing device to confirm the power is off where and when indicated.
- Replace and secure all covers, accessories, hardware, cables, and wires and confirm that a proper ground connection exists before applying power to the unit.
- Use only the specified voltage when operating this equipment and any associated products.

**Failure to follow these instructions will result in death or serious injury.**

The mixed module TM5SDM8DTS has been designed to operate outside of any hazardous location. Only install this equipment in zones known to be free of a hazardous atmosphere.

---

## DANGER

### POTENTIAL FOR EXPLOSION

Install and use the mixed module TM5SDM8DTS in non-hazardous locations only.

**Failure to follow these instructions will result in death or serious injury.**

For the input and output modules (TM5SDI\*\*\* and TM5SDO\*\*\*) and for the mixed modules TM5SDM12DT and TM5SMM6D2L, the following measures apply:

## DANGER

### POTENTIAL FOR EXPLOSION

- Only use this equipment in non-hazardous locations, or in locations that comply with Class I, Division 2, Groups A, B, C and D.
- Do not substitute components which would impair compliance to Class I, Division 2.
- Do not connect or disconnect equipment unless power has been removed or the location is known to be non-hazardous.
- Do not use the USB port(s), if so equipped, unless the location is known to be non-hazardous.

**Failure to follow these instructions will result in death or serious injury.**

## WARNING

### LOSS OF CONTROL

- The designer of any control scheme must consider the potential failure modes of control paths and, for certain critical control functions, provide a means to achieve a safe state during and after a path failure. Examples of critical control functions are emergency stop and overtravel stop, power outage and restart.
- Separate or redundant control paths must be provided for critical control functions.
- System control paths may include communication links. Consideration must be given to the implications of unanticipated transmission delays or failures of the link.
- Observe all accident prevention regulations and local safety guidelines.<sup>1</sup>
- Each implementation of this equipment must be individually and thoroughly tested for proper operation before being placed into service.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

<sup>1</sup> For additional information, refer to NEMA ICS 1.1 (latest edition), "Safety Guidelines for the Application, Installation, and Maintenance of Solid State Control" and to NEMA ICS 7.1 (latest edition), "Safety Standards for Construction and Guide for Selection, Installation and Operation of Adjustable-Speed Drive Systems" or their equivalent governing your particular location.

## WARNING

### UNINTENDED EQUIPMENT OPERATION

- Only use software approved by Schneider Electric for use with this equipment.
- Update your application program every time you change the physical hardware configuration.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### Terminology Derived from Standards

The technical terms, terminology, symbols and the corresponding descriptions in this manual, or that appear in or on the products themselves, are generally derived from the terms or definitions of international standards.

In the area of functional safety systems, drives and general automation, this may include, but is not limited to, terms such as *safety*, *safety function*, *safe state*, *fault*, *fault reset*, *malfunction*, *failure*, *error*, *error message*, *dangerous*, etc.

Among others, these standards include:

Standard	Description
EN 61131-2:2007	Programmable controllers, part 2: Equipment requirements and tests.
ISO 13849-1:2008	Safety of machinery: Safety related parts of control systems. General principles for design.
EN 61496-1:2013	Safety of machinery: Electro-sensitive protective equipment. Part 1: General requirements and tests.
ISO 12100:2010	Safety of machinery - General principles for design - Risk assessment and risk reduction
EN 60204-1:2006	Safety of machinery - Electrical equipment of machines - Part 1: General requirements
EN 1088:2008 ISO 14119:2013	Safety of machinery - Interlocking devices associated with guards - Principles for design and selection
ISO 13850:2006	Safety of machinery - Emergency stop - Principles for design
EN/IEC 62061:2005	Safety of machinery - Functional safety of safety-related electrical, electronic, and electronic programmable control systems
IEC 61508-1:2010	Functional safety of electrical/electronic/programmable electronic safety-related systems: General requirements.
IEC 61508-2:2010	Functional safety of electrical/electronic/programmable electronic safety-related systems: Requirements for electrical/electronic/programmable electronic safety-related systems.
IEC 61508-3:2010	Functional safety of electrical/electronic/programmable electronic safety-related systems: Software requirements.
IEC 61784-3:2008	Digital data communication for measurement and control: Functional safety field buses.

---

Standard	Description
2006/42/EC	Machinery Directive
2014/30/EU	Electromagnetic Compatibility Directive
2014/35/EU	Low Voltage Directive

In addition, terms used in the present document may tangentially be used as they are derived from other standards such as:

Standard	Description
IEC 60034 series	Rotating electrical machines
IEC 61800 series	Adjustable speed electrical power drive systems
IEC 61158 series	Digital data communications for measurement and control – Fieldbus for use in industrial control systems

Finally, the term *zone of operation* may be used in conjunction with the description of specific hazards, and is defined as it is for a *hazard zone* or *danger zone* in the *Machinery Directive (2006/42/EC)* and *ISO 12100:2010*.



---

# Part I

## TM5 Digital I/O General Overview

---

### What Is in This Part?

This part contains the following chapters:

Chapter	Chapter Name	Page
1	TM5 System General Rules for Implementing	17
2	TM5 Digital I/O General Overview	33



---

# Chapter 1

## TM5 System General Rules for Implementing

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
Installation and Maintenance Requirements	18
Wiring Best Practices	21
TM5 Environmental Characteristics	27
Installation Guidelines	29
Hot Swapping Electronic Modules	30

## Installation and Maintenance Requirements

### Before Starting

Read and understand this chapter before beginning the installation of your TM5 System.

The use and application of the information contained herein require expertise in the design and programming of automated control systems. Only you, the user, machine builder or integrator, can be aware of all the conditions and factors present during installation and setup, operation, and maintenance of the machine or process, and can therefore determine the automation and associated equipment and the related safeties and interlocks which can be effectively and properly used. When selecting automation and control equipment, and any other related equipment or software, for a particular application, you must also consider any applicable local, regional or national standards and/or regulations.

Pay particular attention in conforming to any safety information, different electrical requirements, and normative standards that would apply to your machine or process in the use of this equipment.

### ***NOTICE***

#### **ELECTROSTATIC DISCHARGE**

- Store all components in their protective packaging until immediately before assembly.
- Never touch exposed conductive parts such as contacts or terminals.

**Failure to follow these instructions can result in equipment damage.**

### Disconnecting Power

All options and modules should be assembled and installed before installing the control system on a mounting rail, onto a mounting plate or in a panel. Remove the control system from its mounting rail, mounting plate or panel before disassembling the equipment.

### **DANGER**

#### **HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**

- Disconnect all power from all equipment including connected devices prior to removing any covers or doors, or installing or removing any accessories, hardware, cables, or wires except under the specific conditions specified in the appropriate hardware guide for this equipment.
- Always use a properly rated voltage sensing device to confirm the power is off where and when indicated.
- Replace and secure all covers, accessories, hardware, cables, and wires and confirm that a proper ground connection exists before applying power to the unit.
- Use only the specified voltage when operating this equipment and any associated products.

**Failure to follow these instructions will result in death or serious injury.**

**Programming Considerations**

<b> WARNING</b>
<p><b>UNINTENDED EQUIPMENT OPERATION</b></p> <ul style="list-style-type: none"> <li>• Only use software approved by Schneider Electric for use with this equipment.</li> <li>• Update your application program every time you change the physical hardware configuration.</li> </ul> <p><b>Failure to follow these instructions can result in death, serious injury, or equipment damage.</b></p>

**Operating Environment**

The mixed module TM5SDM8DTS has been designed to operate outside of any hazardous location. Only install this equipment in zones known to be free of a hazardous atmosphere.

<b> DANGER</b>
<p><b>POTENTIAL FOR EXPLOSION</b></p> <p>Install and use the mixed module TM5SDM8DTS in non-hazardous locations only.</p> <p><b>Failure to follow these instructions will result in death or serious injury.</b></p>

For the input and output modules (TM5SDI\*\*\* and TM5SDO\*\*\*) and for the mixed modules TM5SDM12DT and TM5SMM6D2L, the following measures apply:

<b> DANGER</b>
<p><b>POTENTIAL FOR EXPLOSION</b></p> <ul style="list-style-type: none"> <li>• Only use this equipment in non-hazardous locations, or in locations that comply with Class I, Division 2, Groups A, B, C and D.</li> <li>• Do not substitute components which would impair compliance to Class I, Division 2.</li> <li>• Do not connect or disconnect equipment unless power has been removed or the location is known to be non-hazardous.</li> <li>• Do not use the USB port(s), if so equipped, unless the location is known to be non-hazardous.</li> </ul> <p><b>Failure to follow these instructions will result in death or serious injury.</b></p>

<b> WARNING</b>
<p><b>UNINTENDED EQUIPMENT OPERATION</b></p> <p>Install and operate this equipment according to the conditions described in the Environmental Characteristics.</p> <p><b>Failure to follow these instructions can result in death, serious injury, or equipment damage.</b></p>

## Installation Considerations

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

- Use appropriate safety interlocks where personnel and/or equipment hazards exist.
- Install and operate this equipment in an enclosure appropriately rated for its intended environment and secured by a keyed or tooled locking mechanism.
- Use the sensor and actuator power supplies only for supplying power to the sensors or actuators connected to the module.
- Power line and output circuits must be wired and fused in compliance with local and national regulatory requirements for the rated current and voltage of the particular equipment.
- Do not use this equipment in safety-critical machine functions unless the equipment is otherwise designated as functional safety equipment and conforming to applicable regulations and standards.
- Do not disassemble, repair, or modify this equipment.
- Do not connect any wiring to reserved, unused connections, or to connections designated as No Connection (N.C.).

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

**NOTE:** JDYX2 or JDYX8 fuse types are UL-recognized and CSA approved.

## Wiring Best Practices

### Introduction

There are several rules that must be followed when wiring the TM5 System.

### Wiring Rules

#### DANGER

##### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power from all equipment including connected devices prior to removing any covers or doors, or installing or removing any accessories, hardware, cables, or wires except under the specific conditions specified in the appropriate hardware guide for this equipment.
- Always use a properly rated voltage sensing device to confirm the power is off where and when indicated.
- Replace and secure all covers, accessories, hardware, cables, and wires and confirm that a proper ground connection exists before applying power to the unit.
- Use only the specified voltage when operating this equipment and any associated products.

**Failure to follow these instructions will result in death or serious injury.**

The following rules must be applied when wiring the TM5 System:

- I/O and communication wiring must be kept separate from the power wiring. Route these 2 types of wiring in separate cable ducting.
- Verify that the operating conditions and environment are within the specification values.
- Use proper wire sizes to meet voltage and current requirements.
- Use copper conductors only.
- Use twisted pair, shielded cables for analog, expert, or fast I/O and TM5 bus signals.
- Use twisted pair, shielded cables for encoder, networks and fieldbus (CAN, serial, Ethernet).

Use shielded, properly grounded cables for all analog and high-speed inputs or outputs and communication connections. If you do not use shielded cable for these connections, electromagnetic interference can cause signal degradation. Degraded signals can cause the controller or attached modules and equipment to perform in an unintended manner.

#### WARNING

##### UNINTENDED EQUIPMENT OPERATION


- Use shielded cables for all fast I/O, analog I/O and communication signals.
- Ground cable shields for all analog I/O, fast I/O and communication signals at a single point<sup>1</sup>.
- Route communication and I/O cables separately from power cables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**


<sup>1</sup>Multipoint grounding is permissible if connections are made to an equipotential ground plane dimensioned to help avoid cable shield damage in the event of power system short-circuit currents.

Refer to the section Grounding the TM5 System (*see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide*) to ground the shielded cables.

This table provides the wire sizes to use with the removable spring terminal blocks (TM5ACTB06, TM5ACTB12, TM5ACTB12, TM5ACTB12PS, TM5ACTB32):

				
mm <sup>2</sup>	0,08...2,5	0,25...2,5	0,25...1,5	2 x 0,25...2 x 0,75
AWG	28...14	24...14	24...16	2 x 24...2 x 18

This table provides the wire sizes to use with the TM5ACTB16 terminal blocks:

			
mm <sup>2</sup>	0,08...1,5	0,25...1,5	0,25...0,75
AWG	28...16	24...16	24...20

## DANGER

### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

The spring clamp connectors of the terminal block are designed for only one wire or one cable end. Two wires to the same connector must be installed with a double wire cable end to help prevent loosening.

**  DANGER**

**LOOSE WIRING CAUSES ELECTRIC SHOCK**

Do not insert more than one wire per connector of the spring terminal blocks unless using a double wire cable end (ferrule).

**Failure to follow these instructions will result in death or serious injury.**

### TM5 Terminal Block

Inserting an incorrect terminal block into the electronic module can cause unintended operation of the application and/or damage the electronic module.

**  DANGER**

**ELECTRIC SHOCK OR UNINTENDED EQUIPMENT OPERATION**

Connect the terminal blocks to their designated location.

**Failure to follow these instructions will result in death or serious injury.**

**NOTE:** To help prevent a terminal block from being inserted incorrectly, ensure that each terminal block and electronic module is clearly and uniquely coded (*see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide*).



### TM5 Strain Relief Using Cable Tie

There are 2 methods to reduce the stress on cables:

- The terminal blocks (*see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide*) have slots to attach cable ties. A cable tie can be fed through this slot to secure cables and wires to reduce stress between them and the terminal block connections.
- After grounding the TM5 System by means of the grounding plate TM2XMTGB, wires can be bundled and affixed to the grounding plate tabs using wire ties to reduce stress on the cables.

The following table provides the size of the cable tie and presents the two methods to reduce the stress on the cables:

Cable Tie Size	Terminal Block	TM2XMTGB Grounding Plate
Thickness	1.2 mm (0.05 in.) maximum	1.2 mm (0.05 in.)
Width	4 mm (0.16 in.) maximum	2.5...3 mm (0.1...0.12 in.)

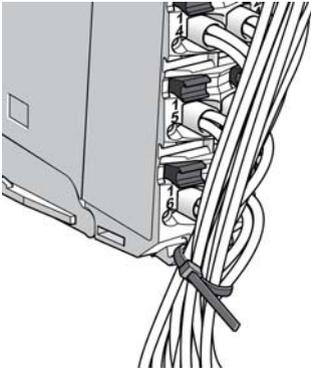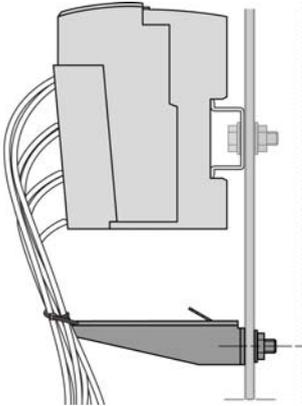Cable Tie Size	Terminal Block	TM2XMTGB Grounding Plate
Mounting illustration		

**⚠ WARNING**

**ACCIDENTAL DISCONNECTION FROM PROTECTIVE GROUND (PE)**

- Do not use the TM2XMTGB Grounding Plate to provide a protective ground (PE).
- Use the TM2XMTGB Grounding Plate only to provide a functional ground (FE).

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

**Protecting Outputs from Inductive Load Damage**

Depending on the load, a protection circuit may be needed for the outputs on the controllers and certain modules. Inductive loads using DC voltages may create voltage reflections resulting in overshoot that will damage or shorten the life of output devices.

**⚠ WARNING**

**INDUCTIVE LOADS**

Use an appropriate external protective circuit or device to reduce the risk of inductive direct current load damage.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

If your controller or module contains relay outputs, these types of outputs can support up to 240 Vac. Inductive damage to these types of outputs can result in welded contacts and loss of control. Each inductive load must include a protection device such as a peak limiter, RC circuit or flyback diode. Capacitive loads are not supported by these relays.


## ⚠ WARNING

### RELAY OUTPUTS WELDED CLOSED

- Always protect relay outputs from inductive alternating current load damage using an appropriate external protective circuit or device.
- Do not connect relay outputs to capacitive loads.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**


**Protective circuit A:** this protection circuit can be used for both AC and DC load power circuits.

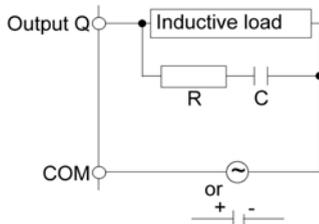

**C** Value from 0.1 to 1  $\mu\text{F}$

**R** Resistor of approximately the same resistance value as the load


**Protective circuit B:** this protection circuit can be used for DC load power circuits.

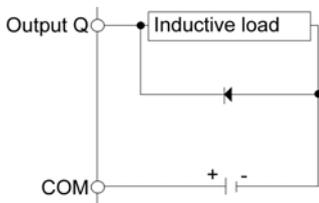

Use a diode with the following ratings:

- Reverse withstand voltage: power voltage of the load circuit x10.
- Forward current: more than the load current.

**Protective circuit C:** this protection circuit can be used for both AC and DC load power circuits.

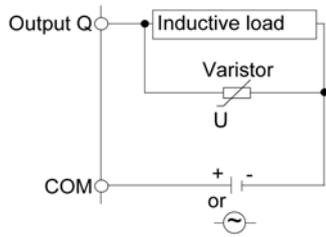

In applications where the inductive load is switched on and off frequently and/or rapidly, ensure that the continuous energy rating (J) of the varistor exceeds the peak load energy by 20 % or more.

## TM5 Environmental Characteristics

### Enclosure Requirements

TM5 components are designed as Zone B, Class A industrial equipment according to IEC/CISPR Publication 11. If they are used in environments other than those described in the standard, or in environments that do not meet the specifications in this manual, your ability to meet electromagnetic compatibility requirements in the presence of conducted and/or radiated interference may be reduced.

The TM5 components meet European Community (CE) requirements for open equipment as defined by EN61131-2. You must install them in an enclosure designed for the specific environmental conditions and to minimize the possibility of unintended contact with hazardous voltages. The enclosure should be constructed of metal to improve the electromagnetic immunity of your TM5 System. The enclosure should, and in the case of UL compliance, must, have a keyed locking mechanism to minimize unauthorized access.

### Environmental Characteristics

This equipment meets UL and CSA standards and, for the majority of the modules, carry both certification marks. In addition, all modules are certified as CE compliant. This equipment is intended for use in a Pollution Degree 2 industrial environment.

**NOTE:** Some module characteristics may differ from those presented in the following tables. Refer to the chapter concerning your specific module for more information.

The table below provides the general environmental characteristics:

Characteristic	Specification	
Standard	IEC61131-2	
Agency Standards	UL 508 CSA 22.2 No. 142-M1987 CSA 22.2 No. 213-M1987  <b>NOTE:</b> This information applies to the input and output modules (TM5SDI*** and TM5SDO***) and for the mixed modules TM5SDM12DT and TM5SMM6D2L.	
Ambient operating temperature	Horizontal installation	0...55 °C (32...131 °F)
	Vertical installation	0...50 °C (32...122 °F)
Storage temperature	-25...70 °C (-13...158 °F)	
Relative humidity	5...95% (non-condensing)	
Degree of pollution	IEC60664	2
Degree of protection	IEC61131-2	IP20
Corrosion immunity	No	
Operating altitude	0...2000 m (0...6.560 ft.)	
Storage altitude	0...3000 m (0...9.842 ft.)	

Characteristic	Specification	
Vibration resistance	Mounted on a DIN rail	3.5 mm (0.138 in.) fixed amplitude from 5...8.4 Hz 9.8 m/s <sup>2</sup> (1 g <sub>n</sub> ) fixed acceleration from 8.4...150 Hz
Mechanical shock resistance		147 m/s <sup>2</sup> (15 g <sub>n</sub> ) for a duration of 11 ms
Connection type		Removable spring terminal block
Connector insertion/removal cycles		50

### Electromagnetic Susceptibility

The table below provides the TM5 System electromagnetic susceptibility specifications:

Characteristic	Specification	Range
Electrostatic discharge	IEC/EN 61000-4-2	8 kV (air discharge) 4 kV (contact discharge)
Electromagnetic fields	IEC/EN 61000-4-3	10 V/m (80 MHz...2 GHz) 10 V/m (80 MHz...2.7 GHz) <sup>(1)</sup>
Fast transients burst	IEC/EN 61000-4-4	Power lines: 2 kV I/O: 1 kV Shielded cable: 1 kV Repetition rate: 5 <sup>(1)</sup> and 100 KHz
Surge immunity 24 Vdc circuit	IEC/EN 61000-4-5	1 kV in common mode 0.5 kV in differential mode
Surge immunity 230 Vac circuit		2 kV in common mode 1 kV in differential mode
Induced electromagnetic field	IEC/EN 61000-4-6	10 V <sub>eff</sub> (0.15...80 MHz)
Conducted emission	EN 55011 (IEC/CISPR11)	150...500 kHz, quasi peak 79 dB $\mu$ V
		500 kHz...30 MHz, quasi peak 73 dB $\mu$ V
Radiated emission	EN 55011 (IEC/CISPR11)	30...230 MHz, 10 m@40 dB $\mu$ V/m
		230 MHz...1 GHz, 10 m@47 dB $\mu$ V/m
<b>(1) Applies for TM5SE11C20005 and TM5SE1MISC20005.</b>		

## Installation Guidelines

### Installation

The following table provides documentation references for spacing requirements and installation of electronic modules and accessories:

<b>Spacing requirement</b>	For mounting positions and minimum clearances, the electronic modules are mounted according to the rules defined for the controllers. Refer to the <i>Enclosing the TM5 System (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)</i> .
<b>Electronic modules installation</b>	Refer to: <ul style="list-style-type: none"> <li>● <i>TM5 Association Table (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)</i>.</li> <li>● <i>Expanding the TM5 System (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)</i>.</li> </ul>
<b>Accessories installation</b>	Refer to the <i>Installation of Accessories (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)</i> .

## Hot Swapping Electronic Modules

### Definition

Hot swapping is the ability to remove an I/O electronic module from its bus base and then replace it with an identical electronic module while the TM5 System is under power without disrupting the normal operations of the controller. When the electronic module is returned to its bus base or replaced with another electronic module with the same reference, it starts to operate again.

### Hot Swapping Considerations

Before initiating a hot swap operation, confirm that the electronic module type is approved for hot swapping (*see page 32*).

When removing or inserting an I/O module while power is applied, remove and insert the electronic module by hand. Do not use tools to hot swap modules because they may come into contact with hazardous voltages. Also, remove any locking clips and the terminal block before removing the electronic module from its bus base. Hot swapping is only allowed when replacing identical electronic modules.

 **DANGER**

**EXPLOSION OR ELECTRIC SHOCK**

- Only perform a hot swap operation in locations known and confirmed to be non-hazardous.
- Use only your hands.
- Do not use any metal tools.
- Do not disconnect any wires from the terminal block.
- Only replace an electronic module with an identical reference.

**Failure to follow these instructions will result in death or serious injury.**

**NOTE:** Only the electronic module is hot swap-able. Do not attempt a hot swap operation on the bus base, or on electronic modules that are integrated with their bus bases such as the compact I/O.

You need to understand and plan for the effects of hot-swapping certain modules. Hot-swapping modules that control power distribution to other modules, for example, can impact your machine or process. Power Distribution modules, Interface Power Distribution Modules, Common Distribution modules, Field Bus Interface Modules, and Transmitter and Receiver modules all either distribute power or communications to other electronic modules. Disconnecting the connector to these modules will interrupt power or communications to the modules they service.

For example, some Power Distribution Modules (PDMs) provide power to both the TM5 power bus and 24 Vdc I/O power segment. It is possible that you may need to replace the PDM because one service is inoperable, but not both. In this case, hot-swapping the PDM would interrupt the service that is still operating, and would interrupt power to the modules drawing power from that service.

I/O configurations that employ Common Distribution modules require careful consideration when wiring is restricted by short wire lengths. It may be the case that in order to hot-swap an electronic module that has become inoperable, you need to disconnect the connector of the Common module servicing it. Further, that same Common module may be connected to modules or devices other than the module you wish to hot-swap. Disconnecting the Common module in this case would necessarily interrupt the supply to the unaffected modules and/or devices. Be sure that you know what I/O slices or devices are connected to the Common module, and the impact that this disconnection would have on your machine or process before attempting a hot-swap operation.

## WARNING

### LOSS OF CONTROL

- The designer of any control scheme must consider the potential failure modes of control paths and, for certain critical control functions, provide a means to achieve a safe state during and after a path failure. Examples of critical control functions are emergency stop and overtravel stop, power outage and restart.
- Separate or redundant control paths must be provided for critical control functions.
- System control paths may include communication links. Consideration must be given to the implications of unanticipated transmission delays or failures of the link.
- Observe all accident prevention regulations and local safety guidelines.<sup>1</sup>
- Each implementation of this equipment must be individually and thoroughly tested for proper operation before being placed into service.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

<sup>1</sup> For additional information, refer to NEMA ICS 1.1 (latest edition), "Safety Guidelines for the Application, Installation, and Maintenance of Solid State Control" and to NEMA ICS 7.1 (latest edition), "Safety Standards for Construction and Guide for Selection, Installation and Operation of Adjustable-Speed Drive Systems" or their equivalent governing your particular location.

**NOTE:** Be sure you thoroughly understand the effects of a hot-swap operation on all modules and connected devices as they relate to your machine or process.

**Modules that are not Hot Swap-able**

Electronic modules that can not be hot swapped under any circumstances include:

TM5	Electronic Modules Type	Reasons
Controller	PCI communication	The replacement of the PCI communication module requires a power cycle before it will be recognized by the controller.
	Controller Power Distribution Module	These modules are not removable.
	Embedded I/O Modules	
Field bus interface	CANopen interface module	The replacement of the CANopen interface module depends on CANopen master architecture. Refer to the Generic CANopen Implementation Guide and documentation associated with the CANopen master.
Compact I/O	I/O modules	These modules are not removable.

---

# Chapter 2

## TM5 Digital I/O General Overview

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
General Description	34
Physical Description	36

## General Description

### Introduction

The range of digital electronic modules includes:

- digital input electronic modules,
- digital output electronic modules,
- mixed digital input/output electronic modules.

The TM5 digital input/output electronic modules need to be associated with a bus base and a terminal block. Every digital electronic module channel has a status LED.

### Digital Input Electronic Modules Features

Digital inputs convert the electronic input signal into a binary value in the controller. The following table shows the digital input electronic modules features, with corresponding channel type and voltage/current:

Reference	Number of Channels	Voltage/current	Wiring	Signal type
TM5SDI2D <i>(see page 42)</i>	2	24 Vdc / 3.75 mA	3 wires	sink
TM5SDI4D <i>(see page 48)</i>	4	24 Vdc / 3.75 mA	3 wires	sink
TM5SDI6D <i>(see page 54)</i>	6	24 Vdc / 3.75 mA	2 wires	sink
TM5SDI12D <i>(see page 62)</i>	12	24 Vdc / 3.75 mA	1 wire	sink
TM5SDI16D <i>(see page 70)</i>	16	24 Vdc / 2.68 mA	1 wire	sink
TM5SDI2DF <i>(see page 78)</i>	2	24 Vdc / 10.5 mA	3 wires	sink
TM5SDI2A <i>(see page 86)</i>	2	100 ... 240 Vac	3 wires	NA
TM5SDI4A <i>(see page 92)</i>	4	100 ... 240 Vac	2 wires	NA
TM5SDI6U <i>(see page 98)</i>	6	100 ... 120 Vac	1 wire	NA

### Digital Output Electronic Modules Features

Digital outputs convert the binary value in the controller into an electronic output signal. The following table shows the digital output electronic modules features with corresponding channel type and voltage/current:

Reference	Number of Channels	Voltage/current	Wiring	Signal type
TM5SDO2T <i>(see page 106)</i>	2	24 Vdc / 0.5 A	3 wires	source
TM5SDO4T <i>(see page 116)</i>	4	24 Vdc / 0.5 A	3 wires	source
TM5SDO4TA <i>(see page 126)</i>	4	24 Vdc / 2 A	3 wires	source
TM5SDO6T <i>(see page 136)</i>	6	24 Vdc / 0.5 A	2 wires	source
TM5SDO8TA <i>(see page 144)</i>	8	24 Vdc / 2 A	1 wire	source
TM5SDO12T <i>(see page 154)</i>	12	24 Vdc / 0.5 A	1 wire	source
TM5SDO16T <i>(see page 164)</i>	16	24 Vdc / 0.5 A	1 wire	source
TM5SDO2R <i>(see page 174)</i>	2	30 Vdc / 230 Vac 5 A C/O	2 change over contacts relays	NA
TM5SDO4R <i>(see page 182)</i>	4	30 Vdc / 230 Vac 5 A N/O	4 normally open contacts relays	NA
TM5SDO2S <i>(see page 190)</i>	2	240 Vac / 1 A	3 wires	source

### Digital Mixed Electronic Modules Features

Digital inputs convert the electronic input signal into a binary value in the controller. Digital outputs convert the binary value in the controller into an electronic output signal. Mixed electronic modules combine both digital inputs and outputs into a single electronic module. The following table shows the mixed input/output electronic modules features with corresponding channel type and voltage/current:

Reference	Number of Channels	Voltage/current	Wiring	Signal type
TM5SDM8DTS <i>(see page 199)</i>	4 inputs 4 outputs	24 Vdc / 1.3 mA 24 Vdc / 0.1 A	1 wire	sink source
TM5SDM12DT <i>(see page 210)</i>	8 inputs 4 outputs	24 Vdc / 3.75 mA 24 Vdc / 0.5 A	1 wire	sink source
TM5SMM6D2L <i>(see page 221)</i>	4 digital inputs	24 Vdc / 3.3 mA	1 wire	sink
	2 digital outputs	24 Vdc / 0.5 A	1 wire	source
	1 analog input	-10...+10 Vdc 0...20 mA/4...20 mA	–	–
	1 analog input	-10...+10 Vdc 0...20 mA	–	–


## Physical Description

### Introduction

Each slice consists of three elements. These elements are the bus base, the electronic module and the terminal block.

### Elements

The following illustration shows the elements of a slice.

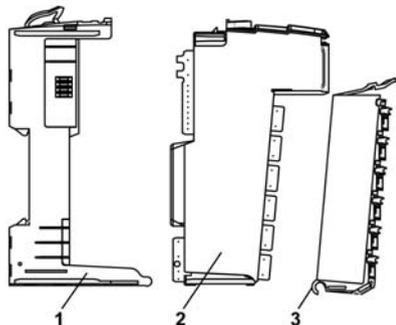

- 1 Bus base
- 2 Electronic module
- 3 Terminal block

When assembled the three components form an integral unit that resists vibration and electrostatic discharge.

### ***NOTICE***


#### **ELECTROSTATIC DISCHARGE**

- Never touch the contacts of the electronic module.
- Always keep the connector in place during normal operation.

**Failure to follow these instructions can result in equipment damage.**


## Dimensions

The following illustration shows the dimensions of a slice:

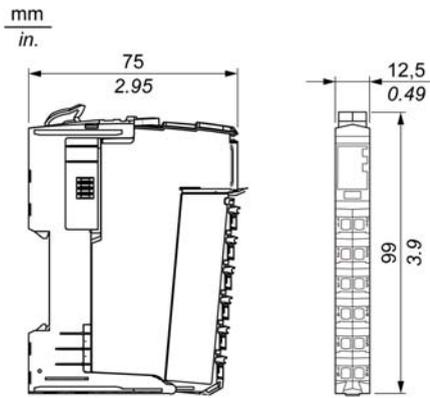

### Pin Assignment

The following illustration shows the pin assignments respectively for the 6-pin, 12-pin and the 16-pin terminal blocks:

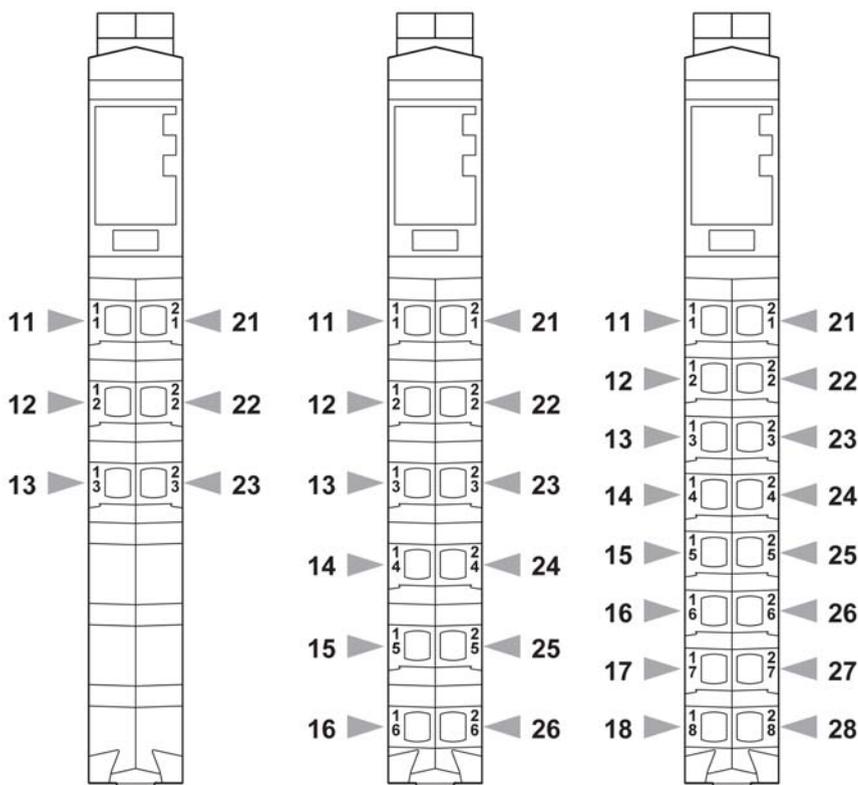

### Accessories

Refer to the *Installation of Accessories* (see *Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide*).

### Labeling

Refer to the *Labeling the TM5 System* (see *Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide*).

---

## Part II

### TM5 System Digital Input Electronic Modules

---

#### What Is in This Part?

This part contains the following chapters:

Chapter	Chapter Name	Page
3	TM5SDI2D Electronic Module 2DI 24 Vdc Sink 3 Wires	41
4	TM5SDI4D Electronic Module 4DI 24 Vdc Sink 3 Wires	47
5	TM5SDI6D Electronic Module 6DI 24 Vdc Sink 2 Wires	53
6	TM5SDI12D Electronic Module 12DI 24 Vdc Sink 1 Wire	61
7	TM5SDI16D Electronic Module 16DI 24 Vdc Sink 1 Wire	69
8	TM5SDI2DF Electronic Module 2DI 24 Vdc Sink 3 Wires	77
9	TM5SDI2A Electronic Module 2DI 100...240 Vac 50/60 Hz 3 Wires	85
10	TM5SDI4A Electronic Module 4DI 100...240 Vac 50/60 Hz 2 Wires	91
11	TM5SDI6U Electronic Module 6DI 100...120 Vac 50/60 Hz 1 Wire	97



---

# Chapter 3

## TM5SDI2D Electronic Module 2DI 24 Vdc Sink 3 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDI2D Presentation	42
TM5SDI2D Characteristics	44
TM5SDI2D Wiring Diagram	46

## TM5SDI2D Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDI2D electronic module:

Main Characteristics	
Number of input channels	2
Input type	Type 1
Signal type	Sink
Rated input voltage	24 Vdc

### Ordering Information

The illustration below shows the TM5SDI2D:

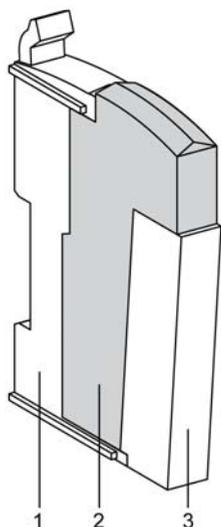

The table below shows the model numbers for the terminal blocks and the bus bases associated with the TM5SDI2D:


Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDI2D	Electronic module	White

Number	Model Number	Description	Color
3	TM5ACTB06	Terminal block, 6 pins	White
	or TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

This illustration shows the TM5SDI2D status LEDs:

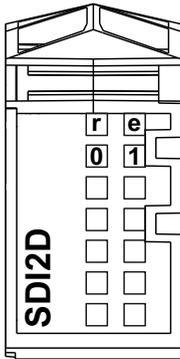

The table below shows the TM5SDI2D status LEDs:

LED	Color	Status	Description
r	Green	Off	No power supply
		Single flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
e+r	Steady red/single green flash		Invalid firmware
0 - 1	Green	Off	Corresponding input deactivated
		On	Corresponding input activated

## TM5SDI2D Characteristics

### Introduction

This is the description characteristics for the TM5SDI2D electronic module. See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDI2D electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	12 mA (all inputs On)
TM5 Bus 5 Vdc current draw	24 mA
Power dissipation	0.41 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7053 dec

## Input Characteristics

The table describes the input characteristics of the TM5SDI2D electronic module:

Input Characteristics		
Number of input channels		2
Wiring type		1, 2 or 3 wires
Rated input voltage		24 Vdc
Input voltage range		20.4...28.8 Vdc
Rated input current at 24 Vdc		3.75 mA
Input impedance		6.4 kΩ
OFF state		5 Vdc max.
ON state		15 Vdc min.
Input filter	Hardware	≤100 μs
	Software	Default 1 ms, can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between input and internal bus	See note <sup>1</sup> .
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

## Sensor Supply


The table describes the sensor supply of the TM5SDI2D electronic module:

Supply	
Voltage	Power segment supply less voltage drop for internal protection.
Voltage drop for internal protection at 500 mA	2 Vdc max
Sensor supply current (for all powered connected sensors)	500 mA
Internal protection	Overload and short-circuit

## TM5SDI2D Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for the TM5SDI2D:

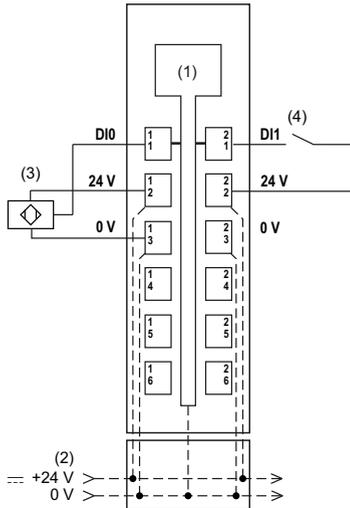

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 3-wire sensor
- 4 2-wire sensor

### **⚠ WARNING**

#### **UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### **⚠ WARNING**

#### **UNINTENDED EQUIPMENT OPERATION**

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

---

# Chapter 4

## TM5SDI4D Electronic Module 4DI 24 Vdc Sink 3 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDI4D Presentation	48
TM5SDI4D Characteristics	50
TM5SDI4D Wiring Diagram	52

## TM5SDI4D Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDI4D electronic module:

Main Characteristics	
Number of input channels	4
Input type	Type 1
Signal type	Sink
Rated input voltage	24 Vdc

### Ordering Information

The following illustration shows the TM5SDI4D:

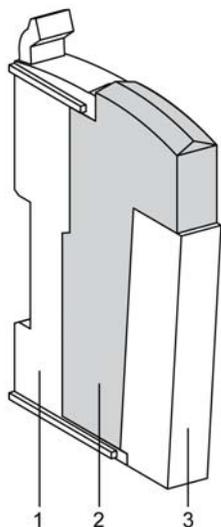

The table below shows the model numbers for the terminal blocks and the bus bases associated with the TM5SDI4D:


Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDI4D	Electronic Module	White

Number	Model Number	Description	Color
3	TM5ACTB06	Terminal block, 6 pins	White
	or TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows the LEDs for TM5SDI4D:

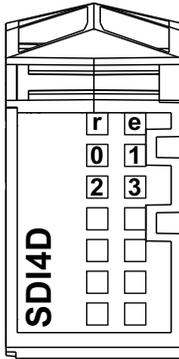

The table below shows the TM5SDI4D status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
e+r	Steady red / single green flash		Invalid firmware
0 - 3	Green	Off	Corresponding input deactivated
		On	Corresponding input activated

## TM5SDI4D Characteristics

### Introduction

This is the description characteristics for the TM5SDI4D electronic module. See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDI4D electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	25 mA (all inputs On)
TM5 Bus 5 Vdc current draw	28 mA
Power dissipation	0.73 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7058 dec

## Input Characteristics

The table describes the input characteristics of the TM5SDI4D electronic module:

Input Characteristics		
Number of input channels		4
Wiring type		1, 2 or 3 wires
Rated input voltage		24 Vdc
Input voltage range		20.4...28.8 Vdc
Rated input current at 24 Vdc		3.75 mA
Input impedance		6.4 k $\Omega$
OFF state		5 Vdc max.
ON state		15 Vdc min.
Input filter	Hardware	$\leq 100 \mu\text{s}$
	Software	Default 1 ms, can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

## Sensor Supply


The table describes the sensor supply of the TM5SDI4D electronic module:

Supply	
Voltage	Power segment supply less voltage drop for internal protection.
Voltage drop for internal protection at 500 mA	2 Vdc max
Sensor supply current (for all powered connected sensors)	500 mA
Internal protection	Overload and short circuit

## TM5SDI4D Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for the TM5SDI4D:

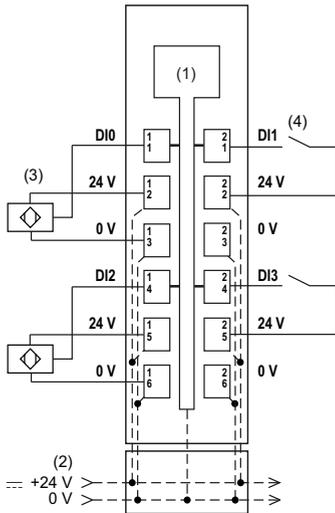

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 3-wire sensor
- 4 2-wire sensor

### **⚠ WARNING**

#### **UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### **⚠ WARNING**

#### **UNINTENDED EQUIPMENT OPERATION**

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

---

# Chapter 5

## TM5SDI6D Electronic Module 6DI 24 Vdc Sink 2 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDI6D Presentation	54
TM5SDI6D Characteristics	56
TM5SDI6D Wiring Diagram	58

## TM5SDI6D Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDI6D electronic module:

Main Characteristics	
Number of input channels	6
Input type	Type 1
Signal type	Sink
Rated input voltage	24 Vdc

### Ordering Information

The following illustration shows the TM5SDI6D:

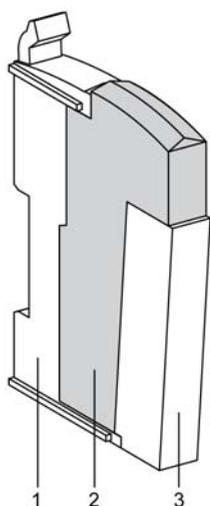

The table below shows the model numbers for the terminal blocks and the bus bases associated with the TM5SDI6D:


Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDI6D	Electronic module	White

Number	Model Number	Description	Color
3	TM5ACTB06	Terminal block, 6 pins	White
	or TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows the LEDs for TM5SDI6D:

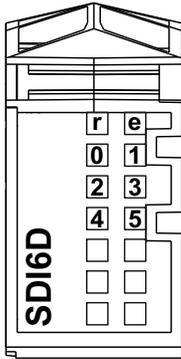

The table below shows the TM5SDI6D status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
e+r	Steady red / single green flash		Invalid firmware
0 - 5	Green	Off	Corresponding input deactivated
		On	Corresponding input activated

## TM5SDI6D Characteristics

### Introduction

This is the description characteristics for the TM5SDI6D electronic module. See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDI6D electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	37 mA (all inputs On)
TM5 Bus 5 Vdc current draw	30 mA
Power dissipation	1.03 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7059 dec

## Input Characteristics

The table describes the input characteristics of the TM5SDI2D electronic module:


Input Characteristics		
Number of input channels		6
Wiring type		1 or 2 wires
Rated input voltage		24 Vdc
Input voltage range		20.4...28.8 Vdc
Rated input current at 24 Vdc		3.75 mA
Input impedance		6.4 kΩ
OFF state		5 Vdc max.
ON state		15 Vdc min.
Input filter	Hardware	≤100 μs
	Software	Default 1 ms, can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

## TM5SDI6D Wiring Diagram

### Wiring Diagram


The following illustration shows the wiring diagram for the TM5SDI6D:

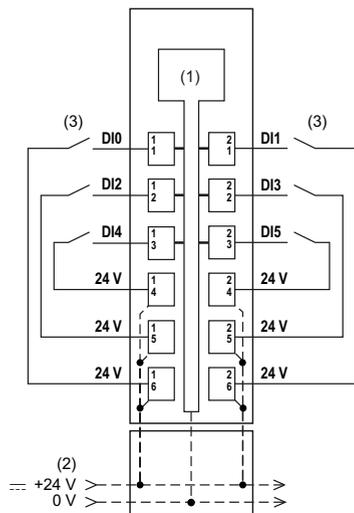

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 2-wire sensor

The 6-input TM5SDI6D electronic module can independently support 2-wire devices. To connect 3-wire electronic sensors, you can add a TM5SPDG6D6F Common Distribution module.

The following illustration shows the wiring diagram for the TM5SPDG6D6F and a TM5SDI6D:

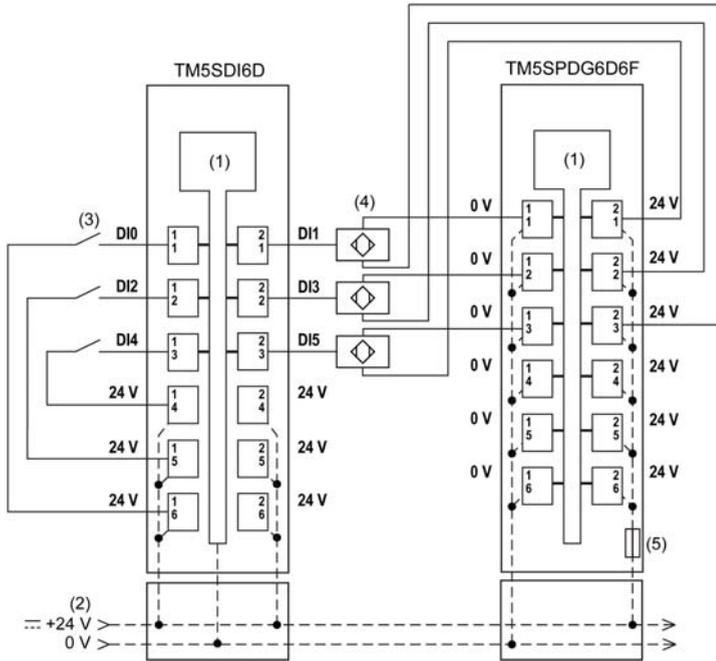

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 2-wire sensor
- 4 3-wire sensor
- 5 Integrated fuse type T slow-blow 6.3 A 250 V exchangeable

## ⚠ WARNING

### UNINTENDED EQUIPMENT OPERATION

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**



---

# Chapter 6

## TM5SDI12D Electronic Module 12DI 24 Vdc Sink 1 Wire

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDI12D Presentation	62
TM5SDI12D Characteristics	64
TM5SDI12D Wiring Diagram	66

## TM5SDI12D Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDI12D electronic module:

Main Characteristics	
Number of input channels	12
Input type	Type 1
Signal type	Sink
Rated input voltage	24 Vdc

### Ordering Information

The following illustration shows the TM5SDI12D:

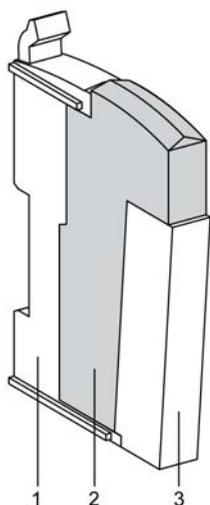


The table below shows the model numbers for the terminal block and the bus bases associated with the TM5SDI12D:

Number	Model Number	Description	Color
1	TM5ACBM11 or TM5ACBM15	Bus base Bus base with address setting	White
2	TM5 SDI12D	Electronic Module	White
3	TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

**Status LEDs**

The following illustration shows the LEDs for TM5SDI12D:

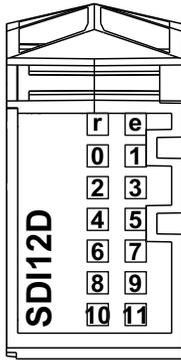

The table below shows the TM5SDI12D status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
e+r	Steady red / single green flash		Invalid firmware
0 - 11	Green	Off	Corresponding input deactivated
		On	Corresponding input activated

## TM5SDI12D Characteristics

### Introduction

This is the description characteristics for the TM5SDI12D electronic module. See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General characteristics

The table below describes the general characteristics of the TM5SDI12D electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	73 mA (all inputs On)
TM5 Bus 5 Vdc current draw	36 mA
Power dissipation	1.93 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7061 dec

## Input Characteristics

The table describes the input characteristics of the TM5SDI12D electronic module:


Input Characteristics		
Number of input channels		12
Wiring type		1 wire
Rated input voltage		24 Vdc
Input voltage range		20.4...28.8 Vdc
De-rating	55...60 °C (131...140 °F)	11 channels
Rated input current at 24 Vdc		3.75 mA
Input impedance		6.4 kΩ
OFF state		5 Vdc max.
ON state		15 Vdc min.
Input filter	Hardware	≤100 μs
	Software	Default 1 ms, can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

## TM5SDI12D Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for the TM5SDI12D:

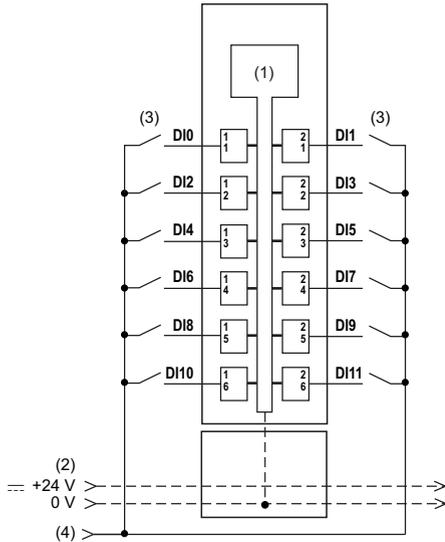

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 2 wire-sensor
- 4 24 Vdc I/O power segment by external connection

**NOTE:** I/O electronic modules and the field devices connected to them must all reside on the same 24 Vdc I/O power segment. If not, the status LEDs may not function correctly. In addition, there may potentially be more significant consequences such as an explosion and/or fire hazard.

## ⚠ WARNING


### POTENTIAL EXPLOSION OR FIRE

Connect the returns from the devices to the same power source as the 24 Vdc I/O power segment serving the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

The 12-input TM5SDI12D electronic module can independently support 1-wire devices. To connect 2-wire devices, you can add a TM5SPDD12F Common Distribution module.

The following illustration shows the wiring diagram for the TM5SPDD12F and a TM5SDI12D:

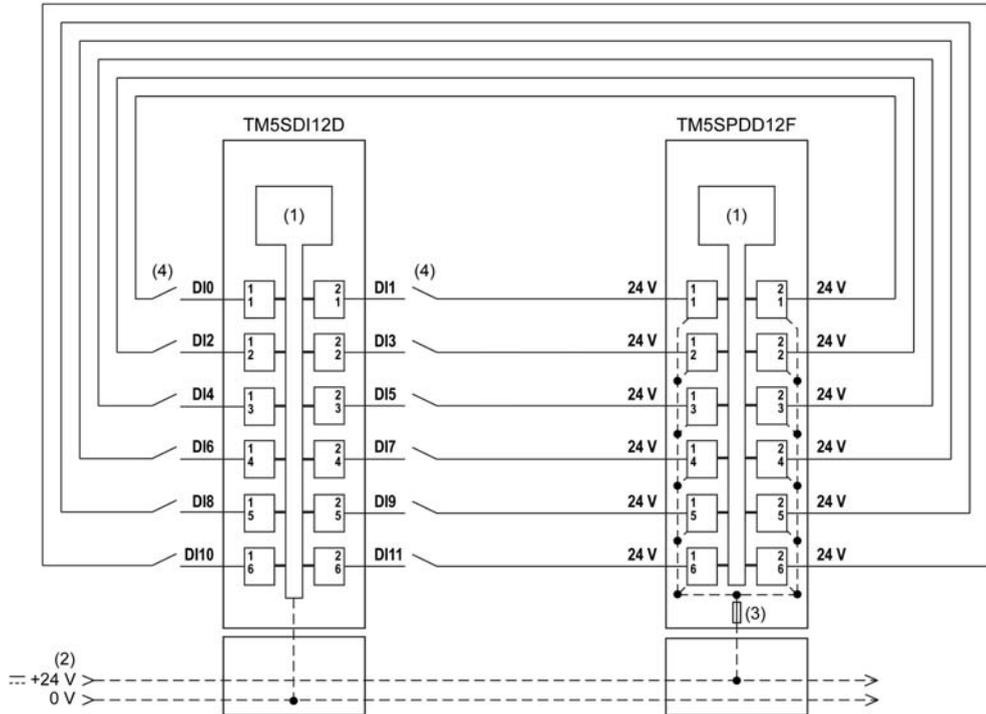

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 Integrated fuse type T slow-blow 6.3 A 250 V exchangeable
- 4 2 wire-sensor

## ⚠ WARNING

### UNINTENDED EQUIPMENT OPERATION

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**



---

# Chapter 7

## TM5SDI16D Electronic Module 16DI 24 Vdc Sink 1 Wire

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDI16D Presentation	70
TM5SDI16D Characteristics	72
TM5SDI16D Wiring Diagram	75

## TM5SDI16D Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDI16D electronic module:

Main Characteristics	
Number of input channels	16
Input type	Type 1
Signal type	Sink
Rated input voltage	24 Vdc

### Ordering Information

The following illustration shows the TM5SDI16D:

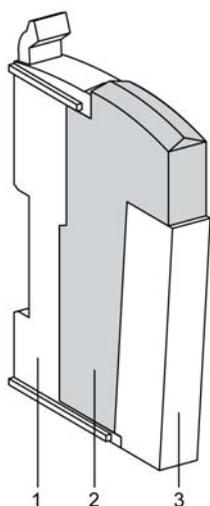


The table below shows the model numbers for the terminal block and the bus base associated with the TM5SDI16D:

Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
2	TM5SDI16D	Electronic Module	White
3	TM5ACTB16	Terminal block, 16 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

**Status LEDs**

The following illustration shows the LEDs for TM5SDI16D:

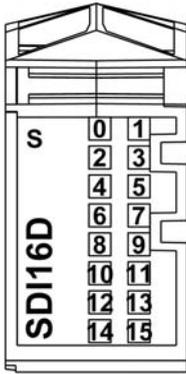

The table below shows the TM5SDI16D status LEDs:

LEDs	Color	Status	Description
s	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
	Red	Off	OK or no power supply
	Steady red / single green flash		Invalid firmware
0 - 15	Green	Off	Corresponding input deactivated
		On	Corresponding input activated

## TM5SDI16D Characteristics

### Introduction

This is the description characteristics for the TM5SDI16D electronic module. See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDI16D electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	61 mA (all inputs On)
TM5 Bus 5 Vdc current draw	36 mA
Power dissipation	1.65 W max.
Weight	21 g (0.7 oz)
ID code	56838 dec

## Input Characteristics


The table describes the input characteristics of the TM5SDI16D electronic module:

Input Characteristics		
Number of input channels		16
Wiring type		1 wire
Rated input voltage		24 Vdc
Input voltage range		20.4...28.8 Vdc
De-rating		See section De-rating ( <i>see page 74</i> ).
Rated input current at 24 Vdc		2.68 mA
Input impedance		8.9 k $\Omega$
OFF state		5 Vdc max.
ON state		15 Vdc min.
Input filter	Hardware	$\leq 100 \mu\text{s}$
	Software	Default 1 ms, can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.


### De-rating of the TM5SDI16D

The following illustration shows the de-rating of simultaneity factor at 24 Vdc and 28.8 Vdc input voltage in vertical installation:

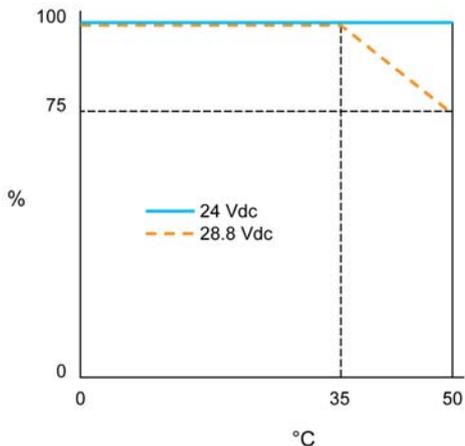

% Simultaneity factor  
 °C Ambient temperature

The following illustration shows the de-rating of simultaneity factor at 24 Vdc and 28.8 Vdc input voltage in horizontal installation:

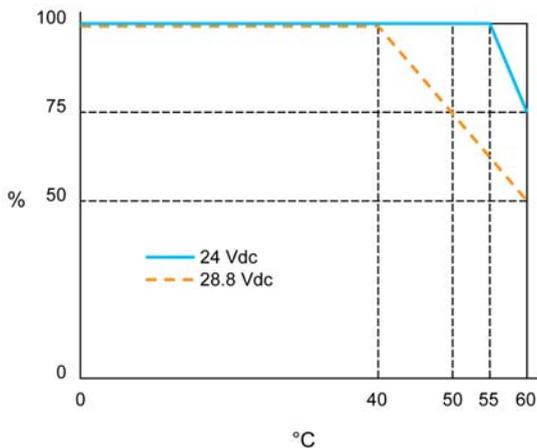


% Simultaneity factor  
 °C Ambient temperature

## TM5SDI16D Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for the TM5SDI16D:

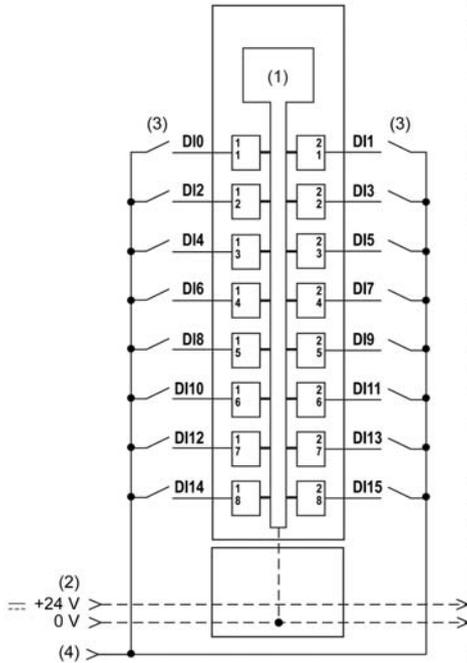

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 2 wire-sensor
- 4 24 Vdc I/O power segment by external connection

**NOTE:** I/O electronic modules and the field devices connected to them must all reside on the same 24 Vdc I/O power segment. If not, the status LEDs may not function correctly. In addition, there may potentially be more significant consequences such as an explosion and/or fire hazard.

## ⚠ WARNING

### POTENTIAL EXPLOSION OR FIRE

Connect the returns from the devices to the same power source as the 24 Vdc I/O power segment serving the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

---

# Chapter 8

## TM5SDI2DF Electronic Module 2DI 24 Vdc Sink 3 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDI2DF Presentation	78
TM5SDI2DF Characteristics	80
TM5SDI2DF Wiring Diagram	83

## TM5SDI2DF Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDI2DF electronic module:

Main Characteristics	
Number of input channels	2
Input frequency	50 kHz max
Input function	Function event counter / gate measurement
Input type	Type 1
Signal type	Sink
Rated input voltage	24 Vdc

### Ordering Information

The following illustration shows the slice with a TM5SDI2DF:

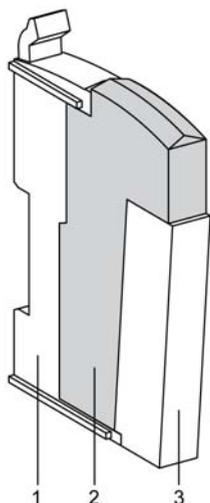

The table below shows the model numbers for the terminal block and bus base associated with the TM5SDI2DF:


Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White

Number	Model Number	Description	Color
2	TM5SDI2DF	Electronic module	White
3	TM5ACTB06	Terminal block, 6 pins	White
	or TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*

### Status LEDs

The following illustration shows the LEDs for TM5SDI2DF:

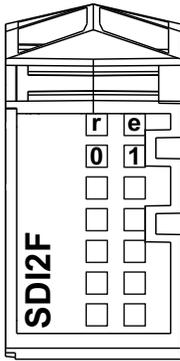

The table below shows the TM5SDI2DF status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
e+r	Steady red / single green flash		Invalid firmware
0-1	Green	On	Input state of the corresponding digital input

## TM5SDI2DF Characteristics

### Introduction

This is the description characteristics for the TM5SDI2DF electronic module. See also Environmental Characteristics (*see page 27*).

<b> WARNING</b>
<b>UNINTENDED EQUIPMENT OPERATION</b>
Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.
<b>Failure to follow these instructions can result in death, serious injury, or equipment damage.</b>

### General Characteristics

The table below describes the general characteristics of the TM5SDI2DF electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O power segment current draw	34 mA
TM5 power bus 5 Vdc current draw	30 mA
Power dissipation	0.97 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7054 dec.

### Input Characteristics

The table below describes the input characteristics of the TM5SDI2DF electronic module:

Input Characteristics	
Number of input channels	2
Wiring type	1, 2 or 3 wires
Signal type	Sink
Input frequency	50 KHz max
Rated input voltage	24 Vdc
Input voltage range	20.4...28.8 Vdc
Rated input current at 24 Vdc	10.5 mA
Input impedance	2.23 kΩ

Input Characteristics		
OFF state		5 Vdc min.
ON state		15 Vdc max.
Noise resistance - cable		Shielded cable is necessary
Input filter	Hardware	≤10 μs
	Software	0...25 ms in 0.2 ms intervals.
Isolation between input and internal bus		See note <sup>1</sup> .
Isolation between channels		Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### Sensor Supply

The table describes the sensor supply of the TM5SDI2DF electronic module:

Sensor Supply	
Voltage	Power segment supply less voltage drop for internal protection
Voltage drop for internal protection at 500 mA	2 Vdc max.
Sensor supply current (for all powered connected sensors)	500 mA
Internal protection	Overload and short circuit

### Event Counter

The table describes the event counter of the TM5SDI2DF electronic module:

Event Counter	
Number of counters	2
Counter 1	Input 1
Counter 2	Input 2
Signal form	Square wave pulse
Input frequency	50 KHz max

Event Counter	
Counter frequency	50 KHz max
Counter size	16 bit
Evaluation	Every positive edge, cyclic counter

### Gate measurement


The table describes the gate measurement of the TM5SDI2DF electronic module:

Gate measurement	
Number of gate measurements	1
Gate measurement using	Input 1 or Input 2
Signal form	Square wave pulse
Evaluation	Positive edge - Negative edge
Pulse length	$\geq 20 \mu\text{s}$
Length of pauses between pulses	$\geq 100 \mu\text{s}$
Internal clock frequency	48 MHz, 24 MHz, 12 MHz, 6 MHz, 3 MHz, 1.5 MHz, 750 KHz, 375 KHz, 187.5 KHz
Counter size	16 bit

## TM5SDI2DF Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for TM5SDI2DF:

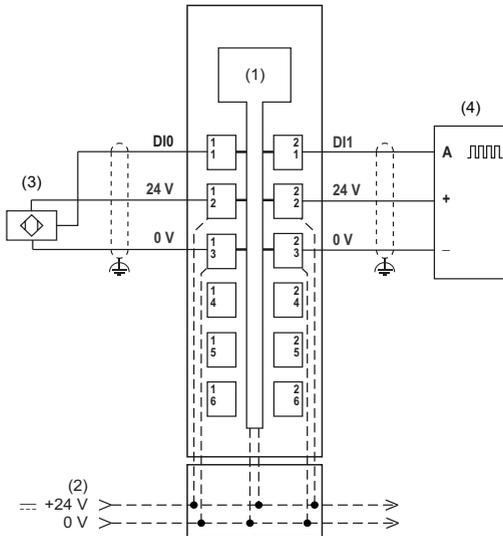

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into bus base
- 3 3-wire sensor
- 4 Counting module

## ⚠ WARNING

### UNINTENDED EQUIPMENT OPERATION

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

Use shielded, properly grounded cables for all analog and high-speed inputs or outputs and communication connections. If you do not use shielded cable for these connections, electromagnetic interference can cause signal degradation. Degraded signals can cause the controller or attached modules and equipment to perform in an unintended manner.

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

- Use shielded cables for all fast I/O, analog I/O and communication signals.
- Ground cable shields for all analog I/O, fast I/O and communication signals at a single point<sup>1</sup>.
- Route communication and I/O cables separately from power cables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

<sup>1</sup>Multipoint grounding is permissible if connections are made to an equipotential ground plane dimensioned to help avoid cable shield damage in the event of power system short-circuit currents.

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

---

# Chapter 9

## TM5SDI2A Electronic Module 2DI 100...240 Vac 50/60 Hz 3 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDI2A Presentation	86
TM5SDI2A Characteristics	88
TM5SDI2A Wiring Diagram	90

## TM5SDI2A Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDI2A electronic module:

Main Characteristics	
Number of input channels	2
Input type	Type 1
Rated input voltage	100 ... 240 Vac

### Ordering Information

The following illustration shows the TM5SDI2A:

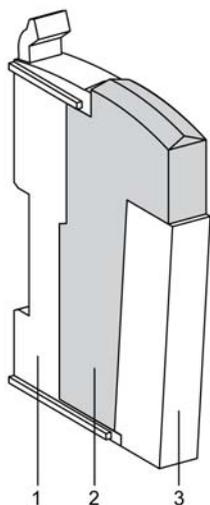


The table below shows the model numbers for the terminal block and the bus base associated with the TM5SDI2A:

Number	Model Number	Description	Color
1	TM5ACBM12	Bus base	Black
2	TM5SDI2A	Electronic Module	Black
3	TM5ACTB32	Terminal block, 12 pins	Black

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows the LEDs for TM5SDI2A:

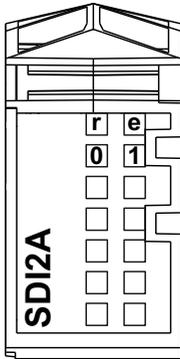

The table below shows the TM5SDI2A status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		Double Flash	I/O supply too low
e+r	Steady red / single green flash		Invalid firmware
0 - 1	Green	Off	Corresponding input deactivated
		On	Corresponding input activated

## TM5SDI2A Characteristics

### Introduction

This is the description characteristics for the TM5SDI2A electronic module. See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDI2A electronic module:

General Characteristics	
Rated power supply voltage	100...240 Vac
Power supply source	Connected to an external AC power
Power supply range	100...240 Vac
24 Vdc I/O segment current draw	0 mA (N.C.)
TM5 Bus 5 Vdc current draw	28 mA
Power dissipation	0.69 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	9540 dec

### Input Characteristics

The table describes the input characteristics of the TM5SDI2A electronic module:

Input Characteristics		
Number of input channels		2
Wiring type		1, 2 or 3 wires
Rated input voltage		240 Vac
Input voltage range		100...240 Vac
Rated input current at 100 Vac		5 mA
Rated input current at 240 Vac		11 mA
Input filter	Hardware	0 ->1: ≤40 ms 1 ->0: ≤30 ms
	Software	Default 1 ms, can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between channels and bus	1 minute 2500 Vac
	Between channels	Not isolated

### Sensor Supply


The table describes the sensor supply of the TM5SDI2A electronic module:

Supply	
Voltage	Electronic module supply minus voltage drop for short circuit protection
Voltage drop for internal protection at 500 mA	2 Vdc max.
Sensor supply current (for all powered connected sensors)	500 Vac max., can be configured by software between 0 and 500 mA
Short circuit protection	Yes

## TM5SDI2A Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for the TM5SDI2A:

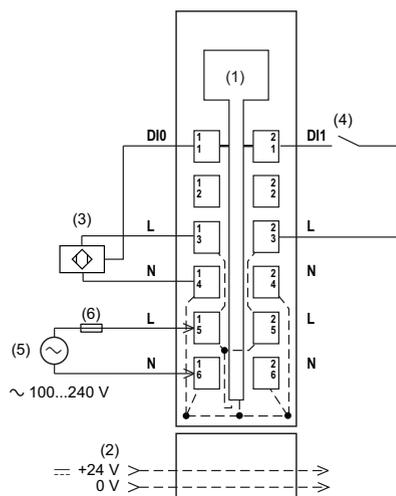

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 3-wire sensor
- 4 2-wire sensor
- 5 External power supply: 100...240 Vac
- 6 External fuse type T slow-blow 1 A 250 V

### **⚠ WARNING**

#### **UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### **⚠ WARNING**

#### **UNINTENDED EQUIPMENT OPERATION**

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

---

# Chapter 10

## TM5SDI4A Electronic Module 4DI 100...240 Vac 50/60 Hz 2 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDI4A Presentation	92
TM5SDI4A Characteristics	94
TM5SDI4A Wiring Diagram	96

## TM5SDI4A Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDI4A electronic module:

Main Characteristics	
Number of input channels	4
Input type	Type 1
Rated input voltage	100 ... 240 Vac

### Ordering Information

The following illustration shows the TM5SDI4A:

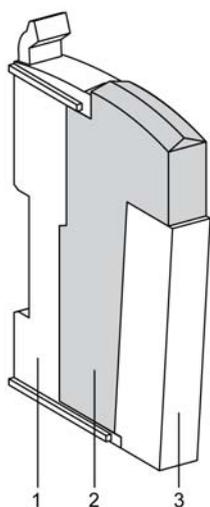


The table below shows the model numbers for the terminal block and the bus base associated with the TM5SDI4A:

Number	Model Number	Description	Color
1	TM5ACBM12	Bus base	Black
2	TM5SDI4A	Electronic Module	Black
3	TM5ACTB32	Terminal block, 12 pins	Black

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

**Status LEDs**

The following illustration shows the LEDs for TM5SDI4A:

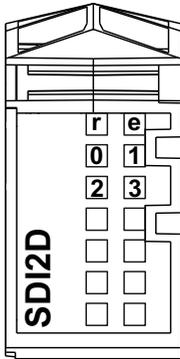

The table below shows the TM5SDI4A status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		Double Flash	I/O supply too low
e+r	Steady red / single green flash		Invalid firmware
0 - 3	Green	Off	Corresponding input deactivated
		On	Corresponding input activated

## TM5SDI4A Characteristics

### Introduction

This is the description characteristics for the TM5SDI4A electronic module. See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDI4A electronic module:

General Characteristics	
Rated power supply voltage	100...240 Vac
Power supply source	Connected to an external AC power
Power supply range	100...240 Vac
24 Vdc I/O segment current draw	0 mA (N.C.)
TM5 Bus 5 Vdc current draw	34 mA
Power dissipation	1.08 W max.
Weight	25 g (0.9 oz)
ID code	9541 dec

### Input Characteristics


The table describes the input characteristics of the TM5SDI4A electronic module:

Input Characteristics		
Number of input channels		4
Wiring type		1 or 2 wires
Rated input voltage		240 Vac
Input voltage range		120...240 Vac
Rated input current at 120 Vac		5 mA
Rated input current at 240 Vac		11 mA
Input filter	Hardware	0 -> 1: ≤40 ms 1 -> 0: ≤30 ms
	Software	Default 1 ms, can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between channels and bus	1 minute 2500 Vac
	Between channels	Not isolated

## TM5SDI4A Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for TM5SDI4A:

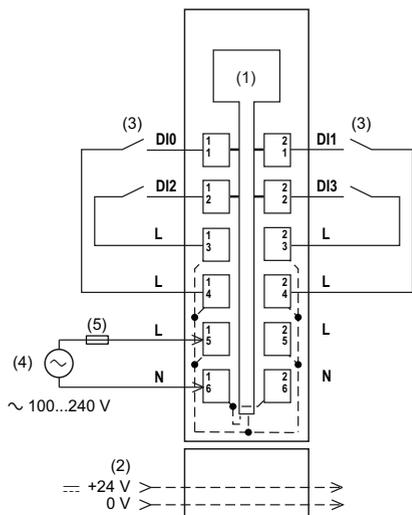

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 2-wire sensor
- 4 External power supply: 100...240 Vac
- 5 External fuse type T slow-blow 1 A - 250 V

### **⚠ WARNING**

#### **UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### **⚠ WARNING**

#### **UNINTENDED EQUIPMENT OPERATION**

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

---

# Chapter 11

## TM5SDI6U Electronic Module 6DI 100...120 Vac 50/60 Hz 1 Wire

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDI6U Presentation	98
TM5SDI6U Characteristics	100
TM5SDI6U Wiring Diagram	102

## TM5SDI6U Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDI6U electronic module:

Main Characteristics	
Number of input channels	6
Input type	Type 1
Rated input voltage	100...120 Vac

### Ordering Information

The following illustration shows the TM5SDI6U:

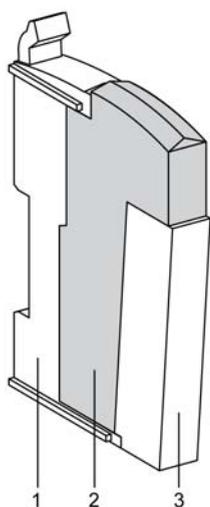


The table below shows the model numbers for the terminal block and the bus base associated with the TM5SDI6U:

Number	Model Number	Description	Color
1	TM5ACBM12	Bus base	Black
2	TM5SDI6U	Electronic Module	Black
3	TM5ACTB32	Terminal block, 12 pins	Black

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

## Status LEDs

The following illustration shows the LEDs for TM5SDI6U:

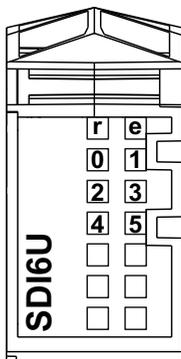

The table below shows the TM5SDI6U status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		Double Flash	I/O supply too low
e+r	Steady red / single green flash		Invalid firmware
0 - 5	Green	Off	Corresponding input deactivated
		On	Corresponding input activated

## TM5SDI6U Characteristics

### Introduction

This is the description characteristics for the TM5SDI6U electronic module. See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDI6U electronic module:

General Characteristics	
Rated power supply voltage	120 Vac
Power supply source	Connected to the external power AC
Power supply range	100...120 Vac
24 Vdc I/O segment current draw	0 mA (N.C.)
TM5 Bus 5 Vdc current draw	42 mA
Power dissipation	0.89 W max.
Weight	25 g (0.9 oz)
ID code	9583 dec


## Input Characteristics

The table describes the input characteristics of the TM5SDI6U electronic module:

Input Characteristics		
Number of input channels		6
Wiring type		1 wire
Rated input voltage		120 Vac
Input voltage range		100...120 Vac
Rated input current at 120 Vac		10 mA at 60 Hz 8.5 mA at 50 Hz
Input filter	Hardware	0 ->1 ≤15 ms 1 ->0 ≤30 ms
	Software	Default 1 ms, can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between channels and bus	1 minute 1500 Vac
	Between channels	Not isolated

## TM5SDI6U Wiring Diagram

### Wiring Diagram

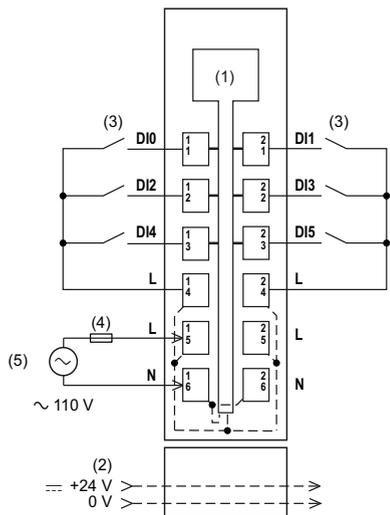

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 1-wire sensor
- 4 External fuse type T slow-blow 1 A - 250 V
- 5 External power supply 110 Vac

## WARNING

### UNINTENDED EQUIPMENT OPERATION

Do not connect wires to unused terminals and/or terminals indicated as "No Connection (N.C.)".  
**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

---

## Part III

### TM5 System Digital Output Electronic Modules

---

#### What Is in This Part?

This part contains the following chapters:

Chapter	Chapter Name	Page
12	TM5SDO2T Electronic Module 2DO 24 Vdc Tr 0.5 A 3 Wires	105
13	TM5SDO4T Electronic Module 4DO 24 Vdc Tr 0.5 A 3 Wires	115
14	TM5SDO4TA Electronic Module 4DO 24 Vdc Tr 2 A 3 Wires	125
15	TM5SDO6T Electronic Module 6DO 24 Vdc Tr 0.5 A 2 Wires	135
16	TM5SDO8TA Electronic Module 8DO 24 Vdc Tr 2 A 1 Wire	143
17	TM5SDO12T Electronic Module 12DO 24 Vdc Tr 0.5 A 1 Wire	153
18	TM5SDO16T Electronic Module 16DO 24 Vdc Tr 0.5 A 1 Wire	163
19	TM5SDO2R Electronic Module 2DO 30 Vdc/230 Vac 50/60 Hz 5A Relay C/O	173
20	TM5SDO4R Electronic Module 4DO 30 Vdc/230 Vac 50/60 Hz 5 A Relay N/O	181
21	TM5SDO2S Electronic Module 2DO 240 Vac 50/60 Hz Triac 1 A 3 Wires	189



---

# Chapter 12

## TM5SDO2T Electronic Module 2DO 24 Vdc Tr 0.5 A 3 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO2T Presentation	106
TM5SDO2T Characteristics	109
TM5SDO2T Wiring Diagram	112

## TM5SDO2T Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO2T electronic module:

Main Characteristics	
Number of outputs channels	2
Output type	Transistor
Signal type	Source
Rated input voltage	24 Vdc
Output current	0.5 A max.

### Ordering Information

The following illustration shows the TM5SDO2T:

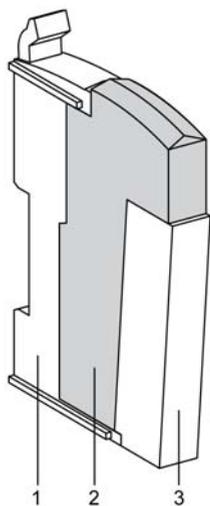

The table below shows the model numbers for the terminal blocks and the bus bases associated with the TM5SDO2T:


Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDO2T	Electronic Module	White

Number	Model Number	Description	Color
3	TM5ACTB06	Terminal block, 6 pins	White
	or TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO2T:

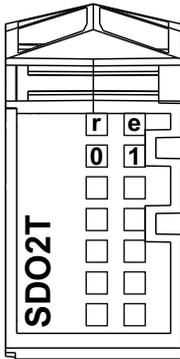

The table below shows the TM5SDO2T status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		Single flash	Error detected on output channels <sup>(1)</sup>
e+r	Steady Red / Single Green flash		Invalid firmware
<b>NOTE:</b>			
<sup>(1)</sup> The e LED flashes when detecting one of the following errors on output channels:			
<ul style="list-style-type: none"> <li>● Short-circuit</li> <li>● Overload</li> <li>● No 24 Vdc Power Segment supply and an output is at logic 1</li> </ul>			

LEDs	Color	Status	Description
0 - 1	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated

**NOTE:**

<sup>(1)</sup> The e LED flashes when detecting one of the following errors on output channels:

- Short-circuit
- Overload
- No 24 Vdc Power Segment supply and an output is at logic 1

## TM5SDO2T Characteristics

### Introduction

This is the description characteristics for TM5SDO2T electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO2T electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	14 mA
TM5 bus 5 Vdc current draw	26 mA
Power dissipation	0.57 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7062 dec

## Output Characteristics

The table below describes the output characteristics of the TM5SDO2T electronic module:

Output Characteristics		
Output channels		2
Wiring type		1, 2 or 3 wires
Output current		0.5 A max. per output
Total output current		1 A max.
Output voltage		24 Vdc
Output voltage range		20.4...28.8 Vdc
Voltage drop		0.3 Vdc max. at 0.5 A rated current
Leakage current when switched off		5 $\mu$ A
Turn on time		300 $\mu$ s max.
Turn off time		300 $\mu$ s max.
Output protection		Against short-circuit and overload, thermal protection
Short-circuit output peak current		12 A max.
Automatic rearming after short-circuit or overload		Yes, 10 ms min. depending on internal temperature
Protection against reverse polarity		Yes
Clamping voltage		Typ. 50 Vdc
Switching frequency	Resistive load	500 Hz max.
	Inductive load	See the switching inductive load characteristics ( <i>see page 111</i> ).
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.


### Actuator Supply

The table below describes the actuator supply of the TM5SDO2T electronic module:

Supply	
Voltage	Power segment supply less voltage drop for internal protection.
Voltage drop for internal protection at 500 mA	2 Vdc max
Actuator supply current (for all powered connected actuators)	500 mA
Internal protection	Overload and short-circuit

### Switching Inductive Loads

The curves below provide the switching inductive load characteristics for the TM5SDO2T electronic module.

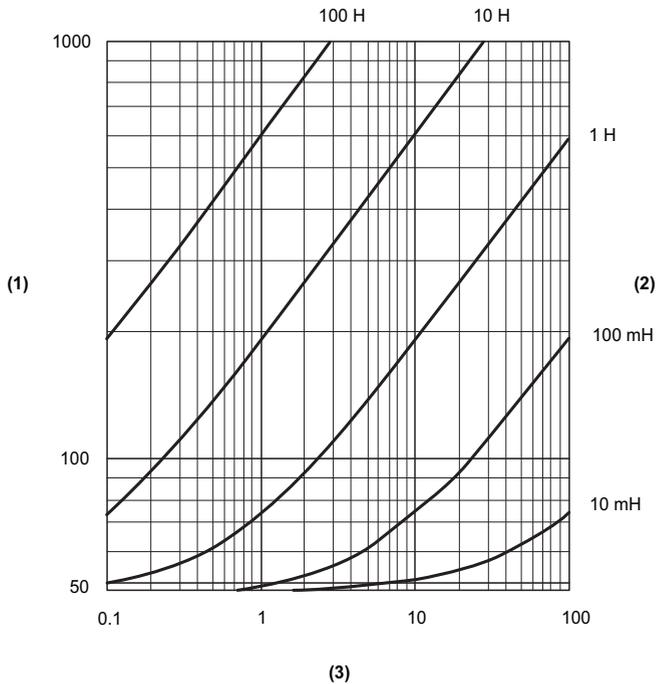


- 1 Load resistance in  $\Omega$
- 2 Load inductance
- 3 Max. operating cycles / second

## TM5SDO2T Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for TM5SDO2T:

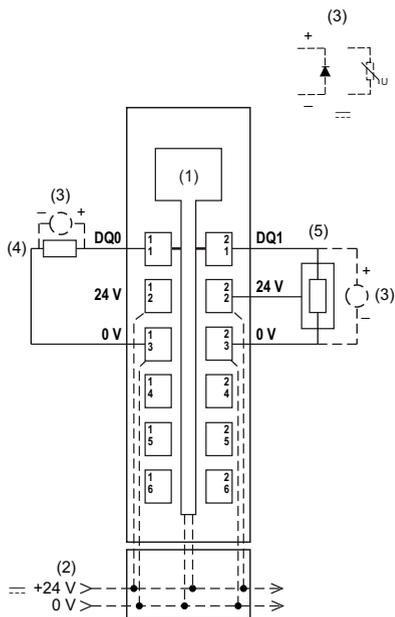

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 Inductive load protection
- 4 2-wire load
- 5 3-wire load

## ⚠ WARNING

### UNINTENDED EQUIPMENT OPERATION

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**



---

# Chapter 13

## TM5SDO4T Electronic Module 4DO 24 Vdc Tr 0.5 A 3 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO4T Presentation	116
TM5SDO4T Characteristics	119
TM5SDO4T Wiring Diagram	122

## TM5SDO4T Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO4T electronic module:

Main Characteristics	
Number of output channels	4
Output type	Transistor
Signal type	Source
Rated input voltage	24 Vdc
Output current	0.5 A max.

### Ordering Information

The following illustration shows the TM5SDO4T:

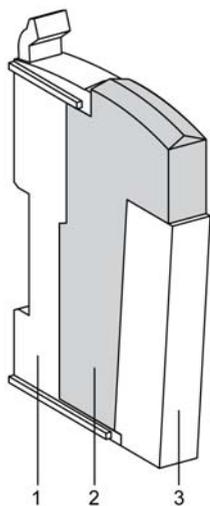

The table below shows the model numbers for the terminal blocks and the bus bases associated with the TM5SDO4T:


Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDO4T	Electronic Module	White

Number	Model Number	Description	Color
3	TM5ACTB06	Terminal block, 6 pins	White
	or TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO4T:

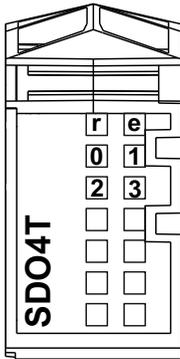

The table below shows the TM5SDO4T status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		Single flash	Error detected on output channels <sup>(1)</sup>
e+r	Steady Red / Single Green flash		Invalid firmware
<b>NOTE:</b>			
<sup>(1)</sup> The e LED flashes when detecting one of the following errors on output channels:			
<ul style="list-style-type: none"> <li>● Short-circuit</li> <li>● Overload</li> <li>● No 24 Vdc Power Segment supply and an output is at logic 1</li> </ul>			

LEDs	Color	Status	Description
0 - 3	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated

**NOTE:**

<sup>(1)</sup> The e LED flashes when detecting one of the following errors on output channels:

- Short-circuit
- Overload
- No 24 Vdc Power Segment supply and an output is at logic 1

## TM5SDO4T Characteristics

### Introduction

This is the description characteristics for TM5SDO4T electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO4T electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	20 mA
TM5 bus 5 Vdc current draw	32 mA
Power dissipation	0.86 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7063 dec

## Output Characteristics

The table below describes the output characteristics of the TM5SDO4T electronic module:

Output Characteristics		
Output channels		4
Wiring type		1, 2 or 3 wires
Output current		0.5 A max. per output
Total output current		2 A max.
Output voltage		24 Vdc
Output voltage range		20.4...28.8 Vdc
Voltage drop		0.3 Vdc max. at 0.5 A rated current
Leakage current when switched off		5 $\mu$ A
Turn on time		300 $\mu$ s max.
Turn off time		300 $\mu$ s max.
Output protection		Against short-circuit and overload, thermal protection
Short circuit output peak current		12 A max.
Automatic rearming after short circuit or overload		Yes, 10 ms min. depending on internal temperature
Protection against reverse polarity		Yes
Clamping voltage		Typ. 50 Vdc
Switching frequency	Resistive load	500 Hz max.
	Inductive load	See the switching inductive load characteristics ( <i>see page 121</i> ).
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.


### Actuator Supply

The table below describes the actuator supply of the TM5SDO4T electronic module:

Supply	
Voltage	Power segment supply less voltage drop for internal protection.
Voltage drop for internal protection at 500 mA	2 Vdc max
Actuator supply current (for all powered connected actuators)	500 mA
Internal protection	Overload and short circuit

### Switching Inductive Loads

The curves below provide the switching inductive load characteristics for the TM5SDO4T electronic module.

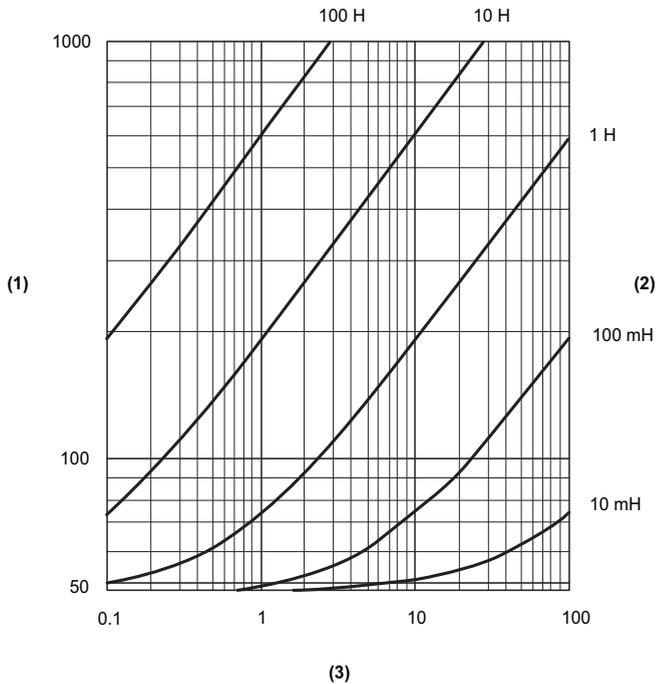


- 1 Load resistance in  $\Omega$
- 2 Load inductance
- 3 Max. operating cycles / second

## TM5SDO4T Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for TM5SDO4T:

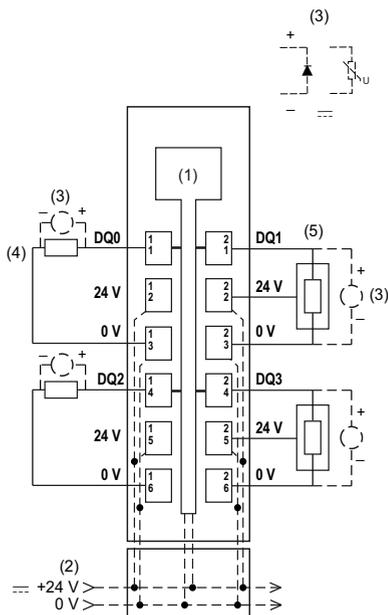

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 Inductive load protection
- 4 2-wire load
- 5 3-wire load

## **⚠ WARNING**

### **UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**



---

# Chapter 14

## TM5SDO4TA Electronic Module 4DO 24 Vdc Tr 2 A 3 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO4TA Presentation	126
TM5SDO4TA Characteristics	129
TM5SDO4TA Wiring Diagram	132

## TM5SDO4TA Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO4TA electronic module:

Main Characteristics	
Number of output channels	4
Output type	Transistor
Signal type	Source
Rated input voltage	24 Vdc
Output current	2 A max.

### Ordering Information

The following illustration shows the TM5SDO4TA:

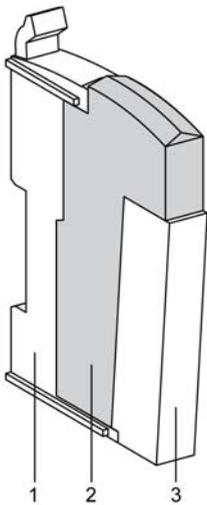


The table below shows the model numbers for the terminal blocks and the bus bases associated with the TM5SDO4TA:

Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDO4TA	Electronic Module	White
3	TM5ACTB06	Terminal block, 6 pins	White
	or TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO4TA:

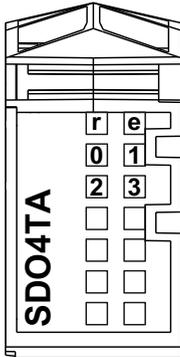

The table below shows the TM5SDO4TA status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		Single flash	Error detected on output channels <sup>(1)</sup>
e+r	Steady Red / Single Green flash		Invalid firmware
0 - 3	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated
<p><b>NOTE:</b></p> <p><sup>(1)</sup> The e LED flashes when detecting one of the following errors on output channels:</p> <ul style="list-style-type: none"> <li>● Short-circuit</li> <li>● Overload</li> <li>● No 24 Vdc Power Segment supply and an output is at logic 1</li> </ul>			

## TM5SDO4TA Characteristics

### Introduction

This is the description characteristics for the TM5SDO4TA electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO4TA electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	21 mA
TM5 bus 5 Vdc current draw	32 mA
Power dissipation	2.10 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7068 dec

## Output Characteristics

The table below describes the output characteristics of the TM5SDO4TA electronic module:

Output Characteristics		
Output channels		4
Wiring type		1, 2 or 3 wires
Output current		2 A max. per output
Total output current		4 A max.
Output voltage		24 Vdc
Output voltage range		20.4...28.8 Vdc
Voltage drop		0.5 Vdc max. at 2 A rated current
Leakage current when switched off		5 $\mu$ A
Turn on time		300 $\mu$ s max.
Turn off time		300 $\mu$ s max.
Output protection		Against short-circuit and overload, thermal protection
Short circuit output peak current		12 A max.
Automatic rearming after short circuit or overload		Yes, 10 ms min. depending on internal temperature
Protection against reverse polarity		Yes
Clamping voltage		Typ. 50 Vdc
Switching frequency	Resistive load	500 Hz max.
	Inductive load	See the switching inductive load characteristics ( <i>see page 131</i> ).
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.


### Actuator Supply

The table below describes the actuator supply of the TM5SDO4TA electronic module:

Supply	
Voltage	Power segment supply less voltage drop for internal protection.
Voltage drop for internal protection at 500 mA	2 Vdc max
Actuator supply current (for all powered connected actuators)	500 mA
Internal protection	Overload and short circuit

### Switching Inductive Loads

The curves below provide the switching inductive load characteristics for the TM5SDO4TA electronic module.

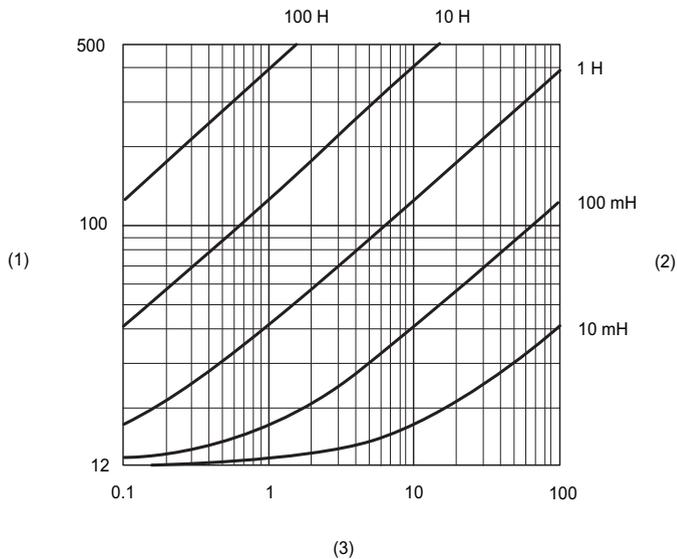


- 1 Load resistance in  $\Omega$
- 2 Load inductance
- 3 Max. operating cycles / second

## TM5SDO4TA Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for TM5SDO4TA:

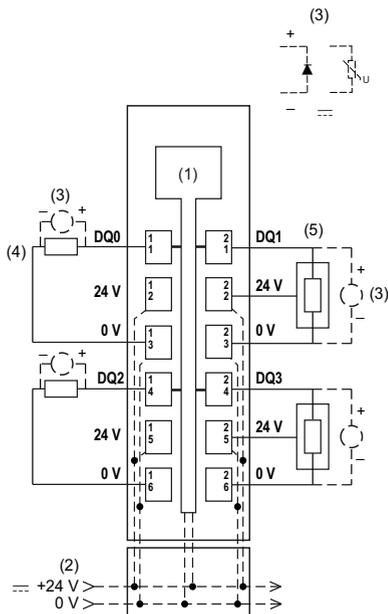

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 Inductive load protection
- 4 2-wire load
- 5 3-wire load

## **⚠ WARNING**

### **UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**



---

# Chapter 15

## TM5SDO6T Electronic Module 6DO 24 Vdc Tr 0.5 A 2 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO6T Presentation	136
TM5SDO6T Characteristics	139
TM5SDO6T Wiring Diagram	142

## TM5SDO6T Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO6T electronic module:

Main Characteristics	
Number of output channels	6
Output type	Transistor
Signal type	Source
Rated input voltage	24 Vdc
Output current	0.5 A max.

### Ordering Information

The following illustration shows the TM5SDO6T:

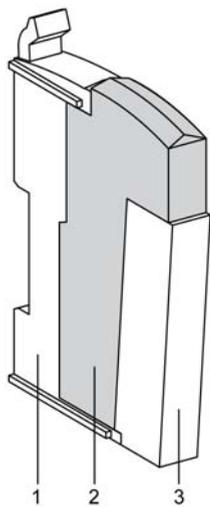


The table below shows the model numbers for the terminal blocks and the bus bases associated with the TM5SD06T:

Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDO6T	Electronic module	White
3	TM5ACTB06	Terminal block, 6 pins	White
	or TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO6T:

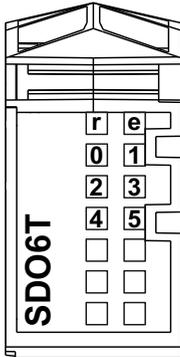

The table below shows the TM5SDO6T status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		Single flash	Error detected on output channels <sup>(1)</sup>
e+r	Steady Red / Single Green flash		Invalid firmware
0 - 5	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated
<p><b>NOTE:</b></p> <p><sup>(1)</sup> The e LED flashes when detecting one of the following errors on output channels:</p> <ul style="list-style-type: none"> <li>● Short-circuit</li> <li>● Overload</li> <li>● No 24 Vdc Power Segment supply and an output is at logic 1</li> </ul>			

## TM5SDO6T Characteristics

### Introduction

This is the description characteristics for the TM5SDO6T electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO6T electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	30 mA
TM5 bus 5 Vdc current draw	36 mA
Power dissipation	1.20 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7064 dec

## Output Characteristics


The table below describes the output characteristics of the TM5SDO6T electronic module:

Output Characteristics		
Output channels	6	
Wiring type	1 or 2 wires	
Output current	0.5 A max. per output	
Total output current	3 A max.	
Output voltage	24 Vdc	
Output voltage range	20.4...28.8 Vdc	
Voltage drop	0.3 Vdc max. at 0.5 A rated current	
Leakage current when switched off	5 $\mu$ A	
Turn on time	300 $\mu$ s max.	
Turn off time	300 $\mu$ s max.	
Output protection	Against short-circuit and overload, thermal protection	
Short-circuit output peak current	12 A max.	
Automatic rearming after short-circuit or overload	Yes, 10 ms min. depending on internal temperature	
Protection against reverse polarity	Yes	
Clamping voltage	Typ. 50 Vdc	
Switching frequency	Resistive load	500 Hz Max.
	Inductive load	See the switching inductive load characteristics ( <i>see page 141</i> ).
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### Switching Inductive Loads

The curves below provide the switching inductive load characteristics for the TM5SDO6T electronic module.

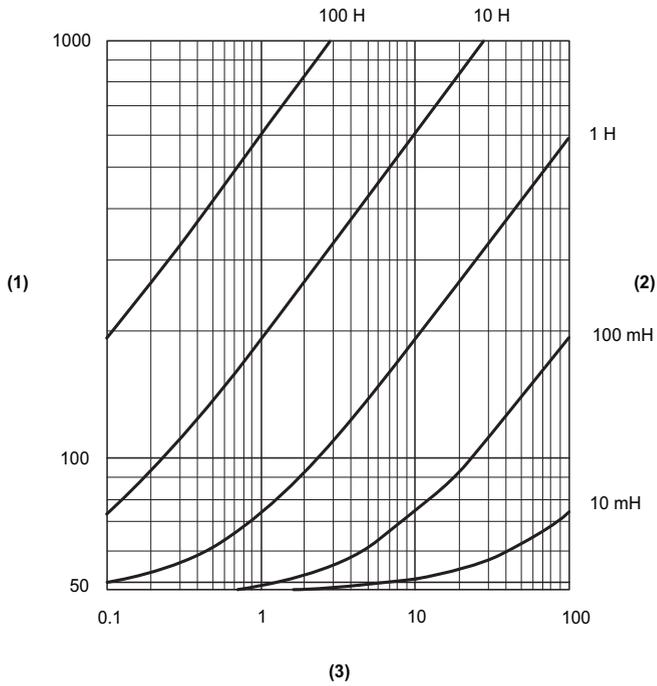


- 1 Load resistance in  $\Omega$
- 2 Load inductance
- 3 Max. operating cycles / second

## TM5SDO6T Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for TM5SDO6T:

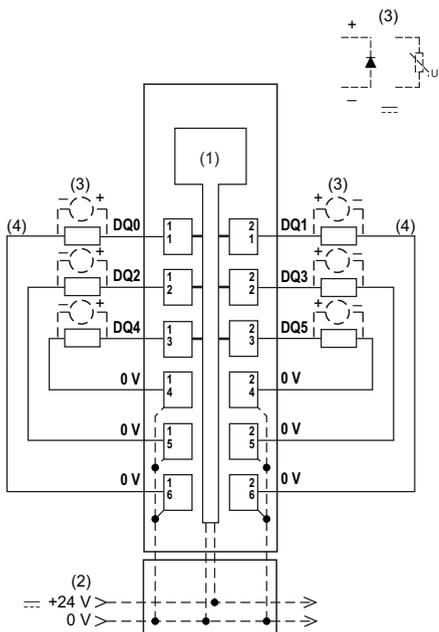

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 Inductive load protection
- 4 2-wire load

## **⚠ WARNING**

### **UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as "No Connection (N.C.)".

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

---

# Chapter 16

## TM5SDO8TA Electronic Module 8DO 24 Vdc Tr 2 A 1 Wire

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO8TA Presentation	144
TM5SDO8TA Characteristics	147
TM5SDO8TA Wiring Diagram	151

## TM5SDO8TA Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO8TA electronic module:

Main Characteristics	
Number of output channels	8
Output type	Transistor
Signal type	Source
Rated input voltage	24 Vdc
Output current	2 A max.

### Ordering Information

The following illustration shows the TM5SDO8TA:

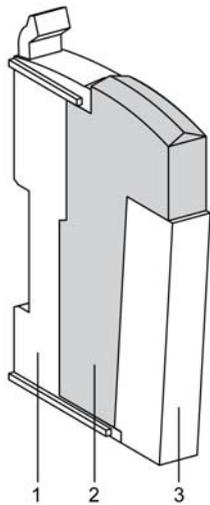


The table below shows the model numbers for the terminal block and the bus bases associated with the TM5SDO8TA:

Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDO8TA	Electronic Module	White
3	TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO8TA:

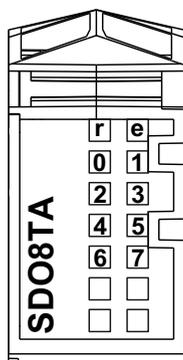

The table below shows the TM5SDO8TA status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
<b>NOTE:</b>			
<sup>(1)</sup> The e LED flashes when detecting one of the following errors on output channels:			
<ul style="list-style-type: none"> <li>● Short-circuit</li> <li>● Overload</li> </ul>			

LEDs	Color	Status	Description
e	Red	Off	OK or no power supply
		Single flash	Error detected on output channels <sup>(1)</sup>
		Double flash	External I/O supply too low
e+r	Steady Red / Single Green flash		Invalid firmware
0 - 7	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated
<p><b>NOTE:</b></p> <p><sup>(1)</sup> The e LED flashes when detecting one of the following errors on output channels:</p> <ul style="list-style-type: none"> <li>● Short-circuit</li> <li>● Overload</li> </ul>			

## TM5SDO8TA Characteristics

### Introduction

This is the description characteristics for TM5SDO8TA electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO8TA electronic module:

General Characteristics	
Rated power supply voltage Power supply source	24 Vdc External power supply
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	0 mA
TM5 bus 5 Vdc current draw	44 mA
Power dissipation	1.50 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7069 dec

## Output Characteristics


The table below describes the output characteristics of the TM5SDO8TA electronic module:

Output Characteristics		
Output channels		8
Wiring type		1 wire
Output current		2 A max. per output*
Total output current		8 A max.
Output voltage		24 Vdc
Output voltage range		20.4...28.8 Vdc
De-rating	- 10...55 °C (14...131 °F)	I = 1.5 A max. by channel*
	55...60 °C (131...140 °F)	I = 1 A max. by channel*
Voltage drop		0.5 Vdc max. at 2 A rated current
Leakage current when switched off		5 µA
Turn on time		300 µs max.
Turn off time		300 µs max.
Output protection		Against short-circuit and overload, thermal protection
Short-circuit output peak current		12 A max.
Automatic rearming after short-circuit or overload		Yes, 10 ms min. depending on internal temperature
Protection against reverse polarity		Yes
Clamping voltage		Typ. 50 Vdc
Switching frequency	Resistive load	500 Hz Max.
	Inductive load	See the switching inductive load characteristics ( <i>see page 150</i> ).
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated
* Refer to De-rating curve of the TM5SDO8TA ( <i>see page 149</i> )		

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### De-rating of the TM5SDO8TA


It is possible to obtain the 2 A rating by observing temperature restrictions. Refer to the de-rating graph below. If the modules adjacent to the TM5SDO8TA dissipate no more than 1 W, this graph applies and 2 A / output can be maintained at 35 °C (95 °F).

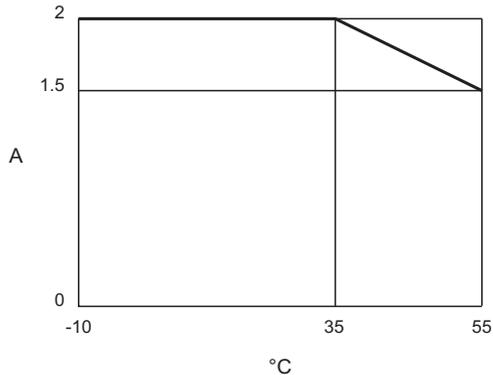

If the dissipation restriction of adjacent modules is not possible in your configuration, the de-rating must shift by -5 °C (- 9 °F), and 2 A / output can be maintained at 30 °C (86 °F). In most industrial applications, this would require the module to be in an air conditioned enclosure to maintain such temperatures.

### Switching Inductive Loads

The curves below provide the switching inductive load characteristics for the TM5SDO8TA electronic module.

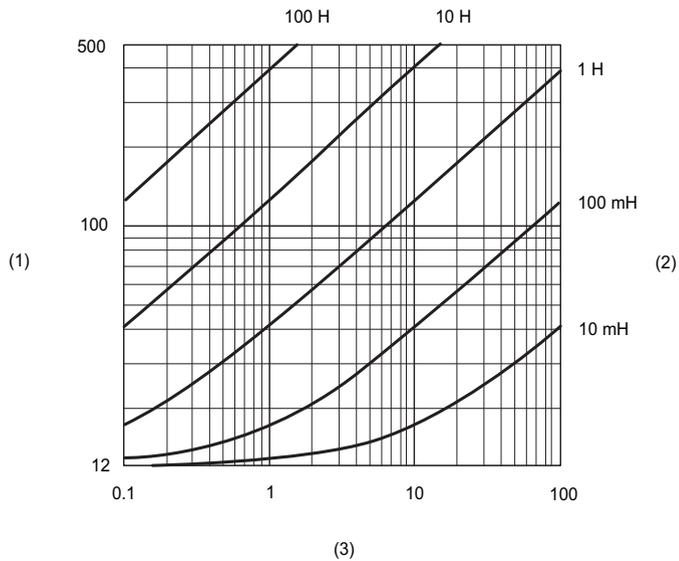


- 1 Coil resistance in  $\Omega$
- 2 Coil inductance
- 3 Max. operating cycles / second

## TM5SDO8TA Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for the TM5SDO8TA:

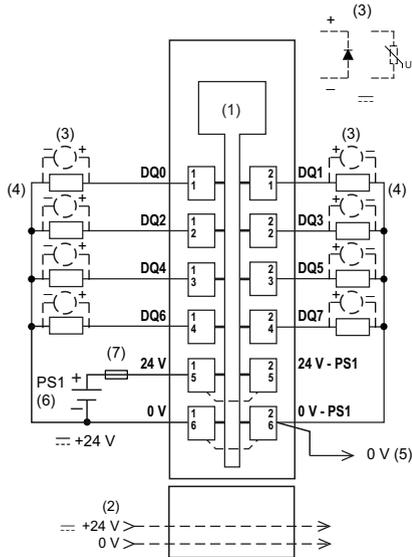

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 Inductive load protection
- 4 2-wire load
- 5 0 Vdc I/O power segment by external connection
- 6 PS1: External isolated power supply 24 Vdc
- 7 External fuse, Type T slow-blow 8 A max., 250 V

## **⚠ WARNING**

### **POTENTIAL OF OVERHEATING AND FIRE**

- Do not connect the modules directly to line voltage.
- Use only isolating PELV systems according to IEC 61140 to supply power to the modules.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**POTENTIAL EXPLOSION OR FIRE**

Connect the returns from the devices to the same power source as the 24 Vdc I/O power segment serving the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

Refer to Protecting Outputs from Inductive Load Damage (*see Modicon, TM5 Communication Modules, Hardware Guide*) for additional important information on this topic.

---

# Chapter 17

## TM5SDO12T Electronic Module 12DO 24 Vdc Tr 0.5 A 1 Wire

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO12T Presentation	154
TM5SDO12T Characteristics	157
TM5SDO12T Wiring Diagram	160

## TM5SDO12T Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO12T electronic module:

Main Characteristics	
Number of output channels	12
Output type	Transistor
Signal type	Source
Rated input voltage	24 Vdc
Output current	0.5 A max.

### Ordering Information

The following illustration shows the TM5SDO12T:

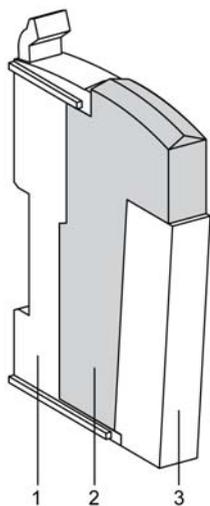


The table below shows the model numbers for the terminal block and the bus bases associated with the TM5SDO12T:

Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDO12T	Electronic Module	White
3	TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO12T:

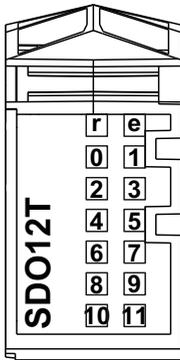

The table below shows the TM5SDO12T status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		Single flash	Error detected on output channels <sup>(1)</sup>
e+r	Steady Red / Single Green flash		Invalid firmware
0 - 11	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated
<p><b>NOTE:</b></p> <p><sup>(1)</sup> The e LED flashes when detecting one of the following errors on output channels:</p> <ul style="list-style-type: none"> <li>● Short circuit</li> <li>● Overload</li> <li>● No I/O supply but the TM5 bus still powered and the output is activated</li> </ul>			

## TM5SDO12T Characteristics

### Introduction

This is the description characteristics for the TM5SDO12T electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO12T electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	48 mA
TM5 bus 5 Vdc current draw	52 mA
Power dissipation	2.04 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	7066 dec

### Output Characteristics


The table below describes the output characteristics of the TM5SDO12T electronic module:

Output Characteristics		
Output channels		12
Wiring type		1 wire
Output current		0.5 A max. per output
Total output current		6 A max.
Output voltage		24 Vdc
Output voltage range		20.4...28.8 Vdc
De-rating	55...60 °C (131...140 °C)	I = 0.4 A max. by channel
Voltage drop		0.3 Vdc max. at 0.5 A rated current
Leakage current when switched off		5 µA
Turn on time		300 µs max.
Turn off time		300 µs max.
Output protection		Against short-circuit and overload, thermal protection
Short circuit output peak current		12 A max.
Automatic rearming after short circuit or overload		Yes, 10 ms min. depending on internal temperature
Protection against reverse polarity		Yes
Clamping voltage		Typ. 50 Vdc
Switching frequency	Resistive load	500 Hz Max.
	Inductive load	See the switching inductive load characteristics ( <i>see page 159</i> ).
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### Switching Inductive Loads

The curves below provide the switching inductive load characteristics for the TM5SDO12T electronic module.

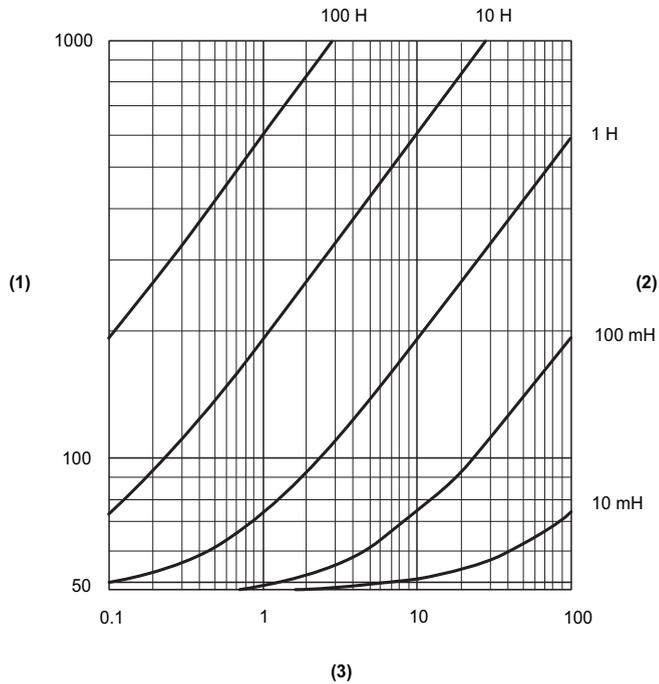


- 1 Load resistance in  $\Omega$
- 2 Load inductance
- 3 Max. operating cycles / second

## TM5SDO12T Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for the TM5SDO12T:

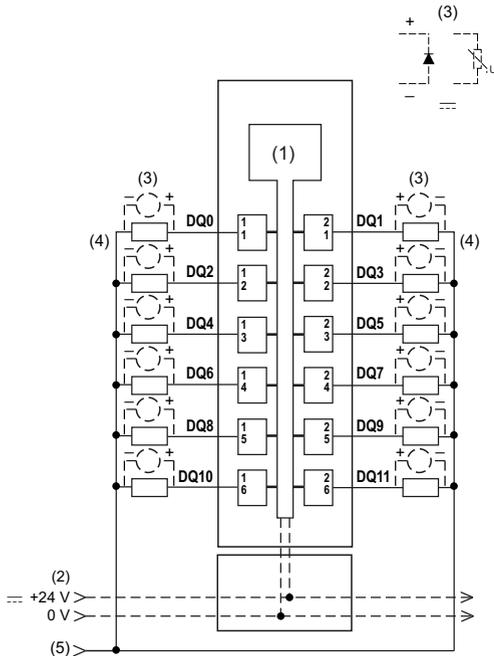

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 Inductive load protection
- 4 2-wire load
- 5 0 Vdc I/O power segment by external connection

**NOTE:** I/O electronic modules and the field devices connected to them must all reside on the same 24 Vdc I/O power segment. If not, the status LEDs may not function correctly. In addition, there may potentially be more significant consequences such as an explosion and/or fire hazard.

## WARNING


### POTENTIAL EXPLOSION OR FIRE

Connect the returns from the devices to the same power source as the 24 Vdc I/O power segment serving the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

The 12-output TM5SDO12T electronic module can independently support 1-wire devices. To connect 2-wire devices, you can add a TM5SPDG12F Common Distribution module.

The following illustration shows the wiring diagram for the TM5SPDG12F and TM5SDO12T:

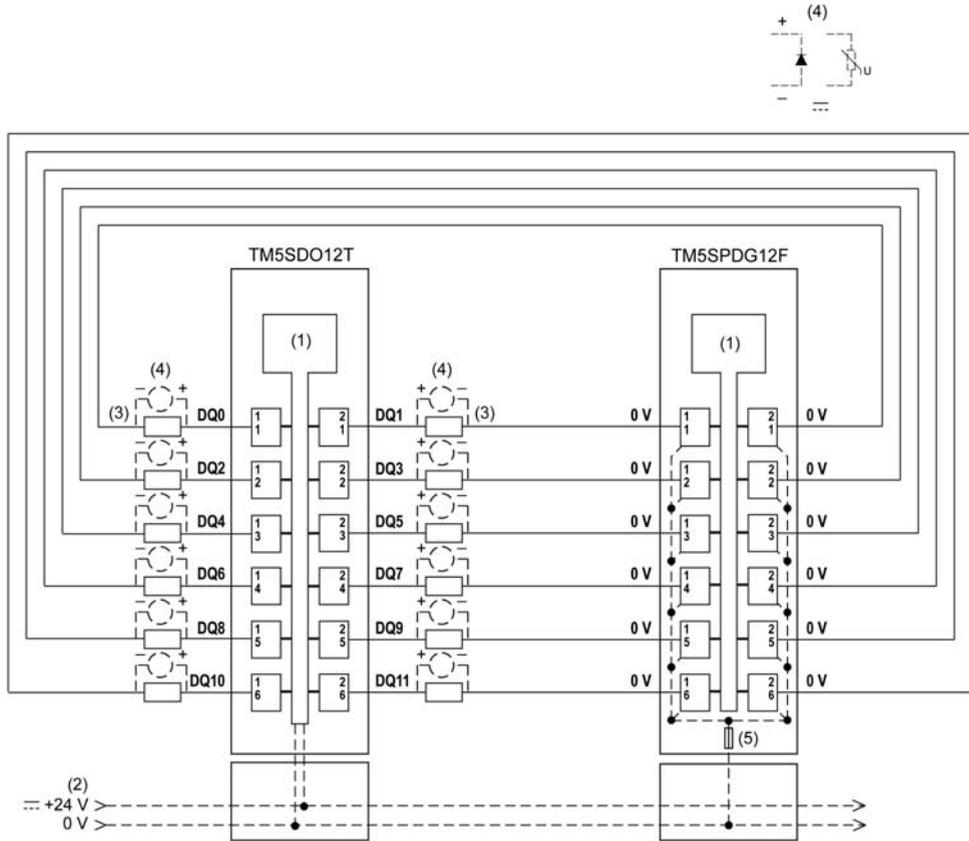

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 2-wire load
- 4 Inductive load protection
- 5 Integrated fuse type T slow-blow 6.3 A 250 V exchangeable

## ⚠ WARNING

### UNINTENDED EQUIPMENT OPERATION

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**



---

# Chapter 18

## TM5SDO16T Electronic Module 16DO 24 Vdc Tr 0.5 A 1 Wire

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO16T Presentation	164
TM5SDO16T Characteristics	166
TM5SDO16T Wiring Diagram	170

## TM5SDO16T Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO16T electronic module:

Main Characteristics	
Number of output channels	16
Output type	Transistor
Signal type	Source
Rated input voltage	24 Vdc
Output current	0.5 A max.

### Ordering Information

The following illustration shows the TM5SDO16T:

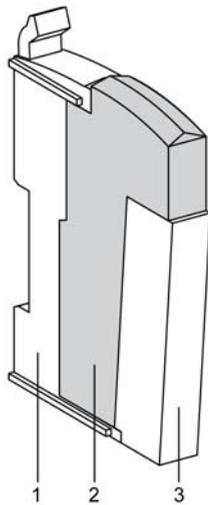


The table below shows the model numbers for the terminal block and the bus bases associated with the TM5SDO16T:

Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White White
2	TM5SDO16T	Electronic Module	White
3	TM5ACTB16	Terminal block, 16 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO16T:

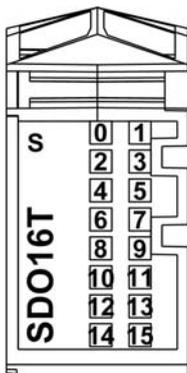

The table below shows the TM5SDO16T status LEDs:

LEDs	Color	Status	Description
s	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
	Red	Off	OK or no power supply
		Single flash	Error detected on output channels <sup>(1)</sup>
	Steady Red / Single Green flash		Invalid firmware
0 - 15	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated
<b>NOTE:</b>			
<sup>(1)</sup> When the diagnostic of the outputs is activated, the s LED flashes when detecting one of the following errors on output channels:			
<ul style="list-style-type: none"> <li>● Short -circuit</li> <li>● Overload</li> <li>● Status of output not corresponding to the command status</li> </ul>			

## TM5SDO16T Characteristics

### Introduction

This is the description characteristics for the TM5SDO16T electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO16T electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	40 mA
TM5 bus 5 Vdc current draw	56 mA
Power dissipation	1.79 W max.
Weight	24 g (0.8 oz)
ID code for firmware update	56839 dec

## Output Characteristics


The table below describes the output characteristics of the TM5SDO16T electronic module:

Output Characteristics		
Output channels		16
Wiring type		1 wire
Output current		0.5 A max. per output
Total output current		8 A max.
Output voltage		24 Vdc
Output voltage range		20.4...28.8 Vdc
De-rating		See section Current de-rating
Voltage drop		0.1 Vdc max. at 0.5 A rated current
Leakage current when switched off		5 $\mu$ A
Turn on time		300 $\mu$ s max.
Turn off time		300 $\mu$ s max.
Output diagnostic		Output monitoring with 10 ms delay, the function is activated or deactivated by software.
Output protection		Against short-circuit and overload, thermal protection
Short -circuit output peak current		3 A max.
Automatic rearming after short -circuit or overload		Yes, 10 ms min. depending on internal temperature
Protection against reverse polarity		Yes
Clamping voltage		Typ. 45 Vdc
Switching frequency	Resistive load	500 Hz Max.
	Inductive load	See the switching inductive load characteristics ( <i>see page 159</i> ).
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.


### Current de-rating

The following illustration shows the current de-rating in vertical installation:

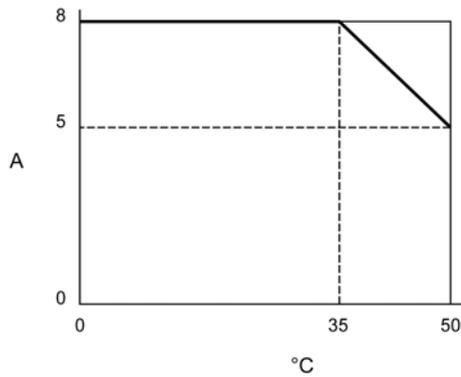

**A** Total current  
**°C** Ambient temperature


The following illustration shows the current de-rating in horizontal installation:

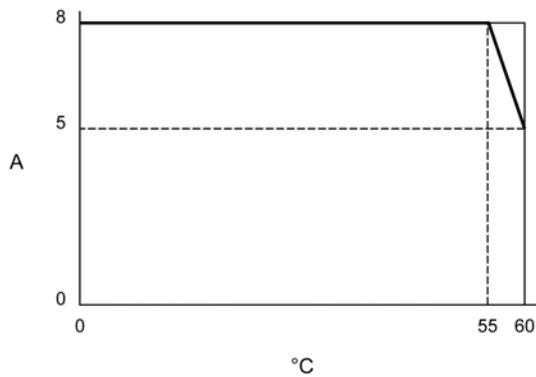

**A** Total current  
**°C** Ambient temperature

### Switching Inductive Loads

The curves below provide the switching inductive load characteristics for the TM5SDO16T electronic module.

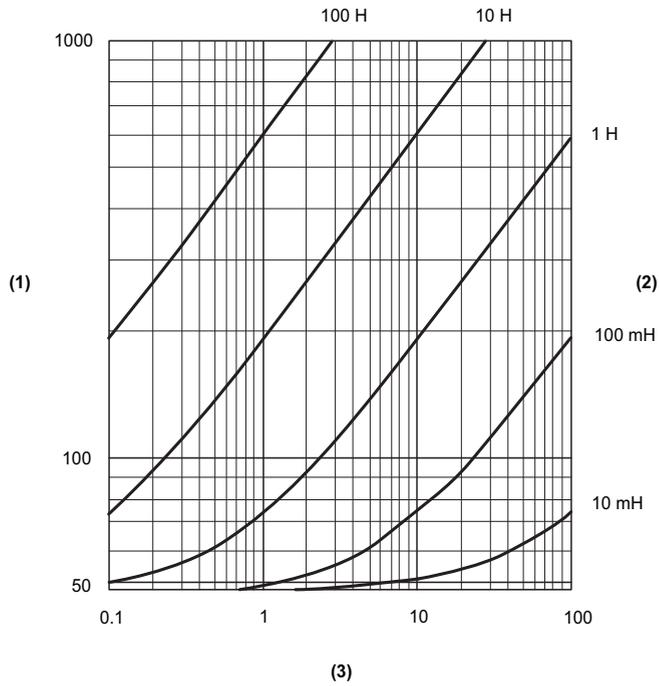


- 1 Load resistance in  $\Omega$
- 2 Load inductance
- 3 Max. operating cycles / second

## TM5SDO16T Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for the TM5SDO16T:

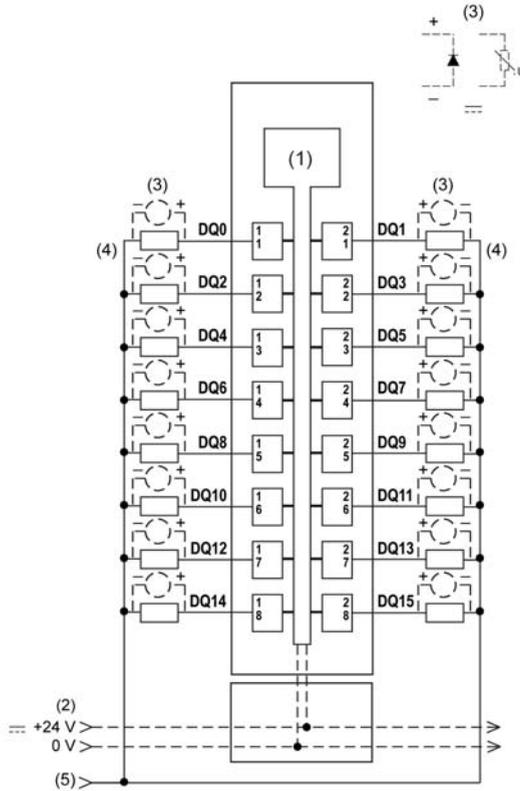

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 Inductive load protection
- 4 2-wire load
- 5 0 Vdc I/O power segment by external connection

**NOTE:** I/O electronic modules and the field devices connected to them must all reside on the same 24 Vdc I/O power segment. If not, the status LEDs may not function correctly. In addition, there may potentially be more significant consequences such as an explosion and/or fire hazard.

 **WARNING**

**POTENTIAL EXPLOSION OR FIRE**

Connect the returns from the devices to the same power source as the 24 Vdc I/O power segment serving the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**



---

# Chapter 19

## TM5SDO2R Electronic Module 2DO 30 Vdc/230 Vac 50/60 Hz 5A Relay C/O

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO2R Presentation	174
TM5SDO2R Characteristics	176
TM5SDO2R Wiring Diagram	179

## TM5SDO2R Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO2R electronic module:

Main Characteristics	
Number of output channels	2
Output type	Relay
Rated input voltage	30 Vdc / 230 Vac
Output current	5 A max.

### Ordering Information

The following illustration shows the TM5SDO2R:

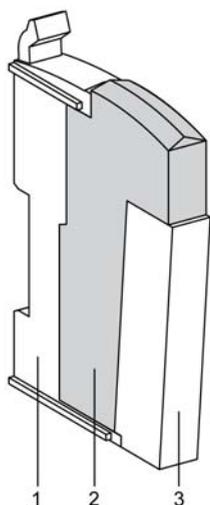


The table below shows the model numbers for the terminal block and the bus bases associated with the TM5SDO2R:

Number	Model Number	Description	Color
1	TM5ACBM12	Bus base	Black
2	TM5SDO2R	Electronic Module	Black
3	TM5ACTB32	Terminal block, 12 pins	Black

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO2R:

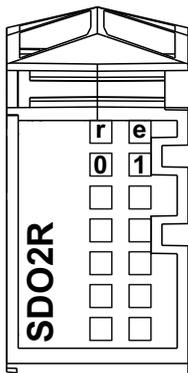

The table below shows the TM5SDO2R status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		On	Error detected or reset state
e+r	Steady Red / Single Green flash		Invalid firmware
0 - 1	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated

## TM5SDO2R Characteristics

### Introduction

This is the description characteristics for the TM5SDO2R electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO2R electronic module:

General Characteristics	
Rated power supply voltage Power supply source	30 Vdc / 230 Vac Connected to the external AC or DC power
Power supply range	24 Vdc...36 Vdc 184 Vac...276 Vac
24 Vdc I/O segment current draw	0 mA (N.C.)
TM5 bus 5 Vdc current draw	90 mA
Power dissipation	2.45 W max.
Weight	25 g (0.9 oz.)
ID code for firmware update	8410 dec

**Output Characteristics**

The table below describes the output characteristics of the TM5SDO2R electronic module:

Output Characteristics		
Output channels		2
Wiring type		2 (C/O) contacts
Output current		5 A max. per output at 30 Vdc 5 A max. per output at 230 Vac
Total output current		10 A max. at 30 Vdc 10 A max. at 230 Vac
Output voltage		30 Vdc / 230 Vac
Output voltage range		24 Vdc...36 Vdc 184 Vac...276 Vac
De-rating	55...60 °C (131...140 °F)	I = 3 A max. by channel
Turn on time		10 ms max.
Turn off time		10 ms max.
Protective circuit	Internal	None
	External DC AC	Inverse diode, RC combination or VDR RC combination or VDR
Automatic rearming after short -circuit or overload		Yes, 10 ms min. depending on internal temperature
Switching capacity	Minimum	10 mA at 5 Vdc
	Maximum	180 W / 1500 VA
Protection against reverse polarity		Yes
Isolation	Between channels and bus	See note <sup>1</sup>
	Between channels	Not isolated
Mechanical durability		Typically 2x10 <sup>7</sup> cycles or more

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

If your controller or module contains relay outputs, these types of outputs can support up to 240 Vac. Inductive damage to these types of outputs can result in welded contacts and loss of control. Each inductive load must include a protection device such as a peak limiter, RC circuit or flyback diode. Capacitive loads are not supported by these relays.

## ⚠ WARNING


### RELAY OUTPUTS WELDED CLOSED

- Always protect relay outputs from inductive alternating current load damage using an appropriate external protective circuit or device.
- Do not connect relay outputs to capacitive loads.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### Electric Durability

The curves below provide the expected life of the relay contacts for the TM5SDO2R electronic module.

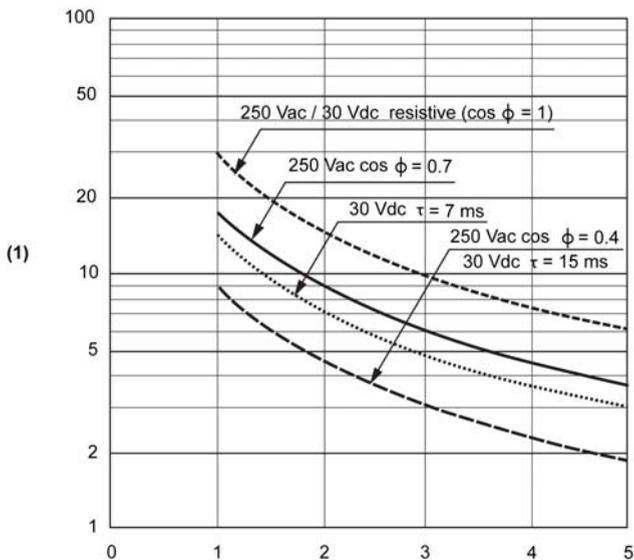


(2)

- 1 Switching procedures ( $\times 10^4$ )
- 2 Switching current in A

## TM5SDO2R Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for TM5SDO2R:

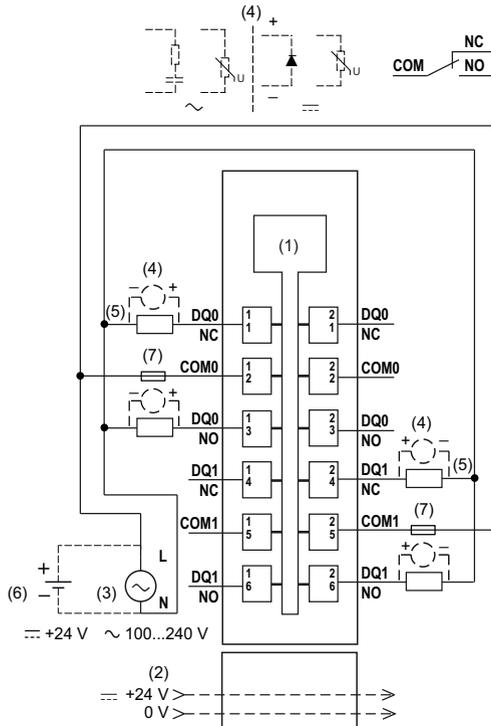

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 External power supply 100...240 Vac
- 4 Inductive load protection
- 5 2-wire load
- 6 External power supply 24 Vdc
- 7 External fuse type T slow-blow 5 A - 250 V

## **⚠ WARNING**

### **UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**



---

# Chapter 20

## TM5SDO4R Electronic Module 4DO 30 Vdc/230 Vac 50/60 Hz 5 A Relay N/O

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO4R Presentation	182
TM5SDO4R Characteristics	184
TM5SDO4R Wiring Diagram	187

## TM5SDO4R Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO4R electronic module:

Main Characteristics	
Number of output channels	4
Output type	Relay
Rated input voltage	30 Vdc / 230 Vac
Output current	5 A max.

### Ordering Information

The following illustration shows the TM5SDO4R:

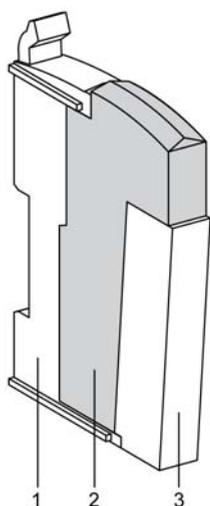


The table below shows the model numbers for the terminal blocks and the bus bases associated with the TM5SDO4R:

Number	Model Number	Description	Color
1	TM5ACBM12	Bus base	Black
2	TM5SDO4R	Electronic Module	Black
3	TM5ACTB32	Terminal block, 12 pins	Black

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO4R:

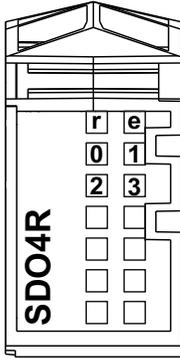

The table below shows the TM5SDO4R status LEDs:

LEDs	Color	Status	Description
r	Green	Off	No power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		On	Error detected or reset state
e+r	Steady Red / Single Green flash		Invalid firmware
0 - 3	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated

## TM5SDO4R Characteristics

### Introduction

This is the description characteristics for the TM5SDO4R electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO4R electronic module:

General Characteristics	
Rated power supply voltage Power supply source	30 Vdc / 230 Vac Connected to an external AC or DC power
Power supply range	24 Vdc ... 36 Vdc 184 Vac ... 276 Vac
24 Vdc I/O segment current draw	0 mA (N.C.)
TM5 bus 5 Vdc current draw	160 mA
Power dissipation	2.30 W max.
Weight	30 g (1.1 oz)
ID code for firmware update	42756 dec

## Output Characteristics

The table below describes the output characteristics of the TM5SDO4R electronic module:

Output Characteristics		
Output channels		4
Wiring type		4 (C/O) contacts
Output current		5 A max. per output at 30 Vdc 5 A max. per output at 230 Vac
Total output current		10 A max. at 30 Vdc 10 A max. at 230 Vac
Output voltage		30 Vdc / 230 Vac
Output voltage range		24 Vdc ... 36 Vdc 184 Vac ... 276 Vac
Turn on time		10 ms max.
Turn off time		10 ms max.
Protective circuit	Internal	None
	External DC AC	Inverse diode, RC combination or VDR RC combination or VDR
Automatic rearming after short-circuit or overload		Yes, 10 ms min. depending on internal temperature
Switching capacity	Minimum	10 mA at 5 Vdc
	Maximum	150 W / 1250 VA
Protection against reverse polarity		Yes
Isolation	Between channels and bus	See note <sup>1</sup>
	Between outputs	Not isolated
Mechanical durability		Typically $2 \times 10^7$ cycles or more

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

If your controller or module contains relay outputs, these types of outputs can support up to 240 Vac. Inductive damage to these types of outputs can result in welded contacts and loss of control. Each inductive load must include a protection device such as a peak limiter, RC circuit or flyback diode. Capacitive loads are not supported by these relays.

## ⚠ WARNING


### RELAY OUTPUTS WELDED CLOSED

- Always protect relay outputs from inductive alternating current load damage using an appropriate external protective circuit or device.
- Do not connect relay outputs to capacitive loads.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### Electric Durability

The curves below provide the expected life of the relay contacts for the TM5SDO2R electronic module.

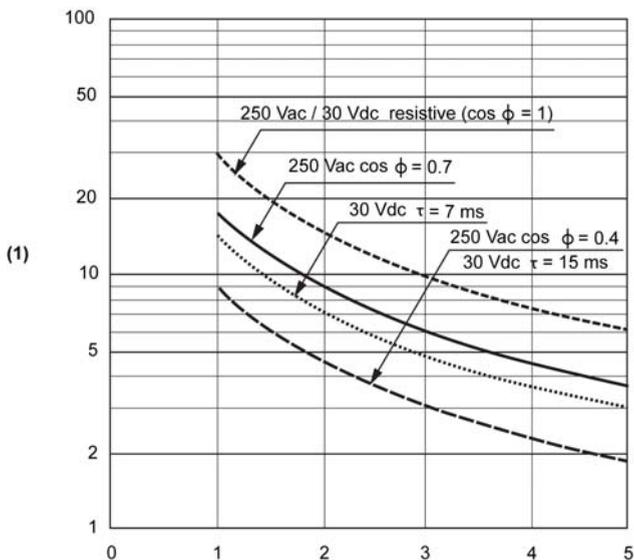

- (1) Switching procedures ( $\times 10^4$ )  
 (2) Switching current in A





---

# Chapter 21

## TM5SDO2S Electronic Module 2DO 240 Vac 50/60 Hz Triac 1 A 3 Wires

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDO2S Presentation	190
TM5SDO2S Characteristics	192
TM5SDO2S Wiring Diagram	194

## TM5SDO2S Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDO2S electronic module:

Main Characteristics	
Number of output channels	2
Output type	Triac
Signal type	Source
Rated output voltage	100...240 Vac
Output current	1 A max.

### Ordering Information

The following illustration shows the TM5SDO2S:

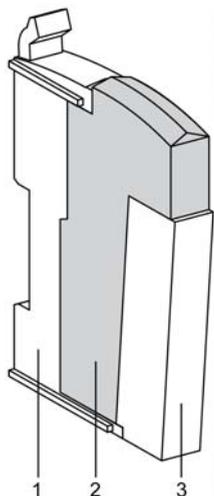


The table below shows the model numbers for the terminal block and the bus base associated with the TM5SDO2S:

Number	Model Number	Description	Color
1	TM5ACBM12	Bus base	Black
2	TM5SDO2S	Electronic Module	Black
3	TM5ACTB32	Terminal block, 12 pins	Black

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration shows LEDs for TM5SDO2S:

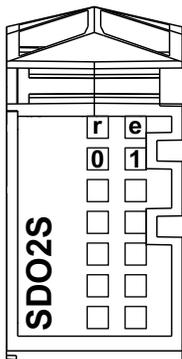

The table below shows the TM5SDO2S diagnostic LEDs:

LEDs	Color	Status	Description
r	Green	Off	No external power supply
		Single Flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no external power supply
		On	Error detected or reset state
		Single flash	Zero cross-over signal has dropped out. <sup>1</sup>
e+r	Steady Red / Single Green flash		Invalid firmware
0 - 1	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated

<sup>1</sup> Zero cross-over detection is activated at the first zero crossover after being switched on .

## TM5SDO2S Characteristics

### Introduction

This is the description characteristics for TM5SDO2S electronic module.

See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDO2S electronic module:

Electrical Characteristics	
Rated power supply voltage	100...240 Vac
Power supply source	Connected to the external AC power
Power supply range	80...264 Vac
24 Vdc I/O segment current draw	–
TM5 bus 5 Vdc current draw	70 mA
Power dissipation	2.13 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	9851 dec

### Output Characteristics

The table below describes the output characteristics of the TM5SDO2S electronic module:

Output Characteristics		
Output channels	2	
Wiring type	2 or 3 wires	
Output current	1 A max. per output	
Total output current	1 A max.	
Output voltage	100...240 Vac	
Output voltage range	80...264 Vac	
De-rating	- 10...55 °C (14...131 °F)	I = 1 A max. by channel
	55...60 °C (131...140 °F)	I = 0.3 A max. by channel
Voltage drop	1.5 V <sub>RMS</sub>	
Leakage current	10 mA max. at 240V <sub>RMS</sub>	
Turn on time	11 ms max. at 50 Hz and 9.3 ms max. at 60 Hz	
Turn off time	11 ms max. at 50 Hz and 9.3 ms max. at 60 Hz	
Zero cross-over switches	Yes	
Over voltage protection between L and N	Yes	
Surge current	40 A for 20 ms max. and 10 A for 1 s max.	
Automatic rearming after short circuit or overload	Yes, 10 ms min. depending on internal temperature	
Isolation	Between output and internal bus	2500 Vac after 1 minute
	Between channels	Not isolated

### Actuator Supply


The table below describes the actuator supply of the TM5SDO2S electronic module:

Supply	
Voltage	External power supply.
Voltage drop for internal protection at 500 mA	1.5 V <sub>RMS</sub> max.

## TM5SDO2S Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for TM5SDO2S:

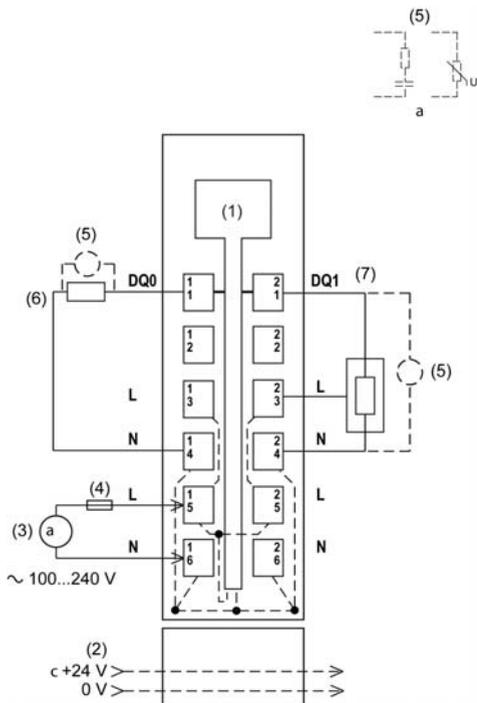

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 External power supply 100...240 Vac
- 4 External fuse type T slow-blow 3.15 A - 250 V
- 5 Inductive load protection
- 6 2-wire load
- 7 3-wire load

## **⚠ WARNING**

### **UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as "No Connection (N.C.)".

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

Refer to Protecting Outputs from Inductive Load Damage (*see Modicon, TM5 Communication Modules, Hardware Guide*) for additional important information on this topic.



---

# Part IV

## TM5 System Digital Mixed Input/Output

---

### What Is in This Part?

This part contains the following chapters:

Chapter	Chapter Name	Page
22	TM5SDM8DTS Electronic Module 4DI/4DO 24 Vdc Tr 0.1 A 1 Wire	199
23	TM5SDM12DT Electronic Module 8DI/4DO 24 Vdc Tr 0.5 A 1 Wire	209
24	TM5SMM6D2L Electronic Module 4DI/2DO 24Vdc Tr 0.5A / 1AI/1AO $\pm 10V/0-20mA$ 12 Bits	221



---

# Chapter 22

## TM5SDM8DTS Electronic Module 4DI/4DO 24 Vdc Tr 0.1 A 1 Wire

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDM8DTS Presentation	200
TM5SDM8DTS Characteristics	203
TM5SDM8DTS Wiring Diagram	207

## TM5SDM8DTS Presentation

### Overview

The TM5SDM8DTS electronic module has been designed for use with PacDrive 3 systems supporting TM5 Sercos III bus interface TM5NS31. You can configure the modules to support oversampled input and outputs or time stamped inputs and oversampled outputs. For more information, refer to the document *TM5SDM8DTS Parameter Description*.

The time stamped inputs of the TM5SDM8DTS electronic module are used by PacDrive 3 in support of the touchprobe functionality. Throughout the documentation, the time stamped inputs of this module are often referred to as touchprobe inputs.

Given that the TM5SDM8DTS electronic module has been designed and optimized exclusively for use with PacDrive 3 applications, certain product characteristics for this module differ from those of other TM5 modules. For example, like the PacDrive 3 devices, the TM5SDM8DTS electronic module is certified for use in non-hazardous locations only.

 <b>DANGER</b>
<b>POTENTIAL FOR EXPLOSION</b>
Install and use the mixed module TM5SDM8DTS in non-hazardous locations only.
<b>Failure to follow these instructions will result in death or serious injury.</b>

There may be other specific differences between this and other TM5 modules characteristics that may be important to your application. For more information, see TM5SDM8DTS Characteristics (*see page 203*).

### Main Characteristics


The table below describes the main characteristics of the TM5SDM8DTS electronic module:

Main characteristics	
Number of digital input channels (configurable as time stamped input or oversampled input)	4
Input type	Refer to the Input Characteristics table ( <i>see page 204</i> ).
Input signal type	Sink
Number of digital output channels (configurable as oversampled output)	4
Output type	Transistor
Output signal type	Source
Output current	0.1 A per output
Rated input voltage	24 Vdc

**NOTE:** Use the TM5SDM8DTS electronic module only with PacDrive 3 and TM5 Sercos III bus interface TM5NS31.

### Ordering Information

The illustration below shows the TM5SDM8DTS:

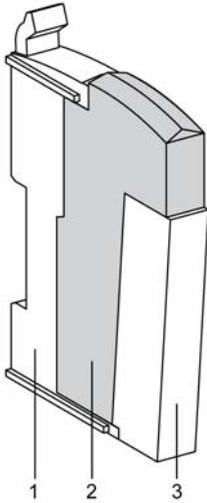


The table below shows the references for the terminal block and the bus bases associated with the TM5SDM8DTS:

Number	Reference	Description	Color
1	TM5ACBM11 or TM5ACBM15	Bus base  Bus base with address setting	White  White
2	TM5SDM8DTS	Electronic module	White
3	TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration describes the LEDs for TM5SDM8DTS:

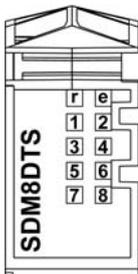

The table below shows the TM5SDM8DTS input status LEDs:

LED	Color	Status	Description
r	Green	Off	No power supply
		Single flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		On	Error detected or reset state
		Double flash	One of the following errors has been detected: <ul style="list-style-type: none"> <li>● Oversampled output control error</li> <li>● Oversampled output copy error</li> <li>● Edge detect poll cycle violation</li> <li>● Error on edge generator unit 1...4</li> </ul>
1 - 8	Green		Status of the corresponding digital signal

## TM5SDM8DTS Characteristics

### Introduction

This is the description characteristics for the TM5SDM8DTS electronic module. See also Environmental Characteristics (*see page 27*).

**NOTE:** In contrast to the description in Environmental Characteristics (*see page 27*), the TM5SDM8DTS electronic module has been designed to meet UL and CSA standards, and has been certified as cULus. In addition, the module has been designed for non-hazardous locations.

### DANGER

#### POTENTIAL FOR EXPLOSION

Install and use the mixed module TM5SDM8DTS in non-hazardous locations only.

**Failure to follow these instructions will result in death or serious injury.**

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDM8DTS electronic module:

General characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	62.5 mA
TM5 bus 5 Vdc current draw	2 mA
Power dissipation	1.51 W maximum
Weight	22 g (0.8 oz)
ID code for firmware update	43323 dec

### Input Characteristics

The table describes the input characteristics of the TM5SDM8DTS electronic module:

Input characteristics		
Number of input channels	4 inputs	
Wiring type	1 wire	
Rated input voltage	24 Vdc	
Input voltage range	20.4...28.8 Vdc	
Rated input current at 24 Vdc	1.3 mA	
Input impedance	18.4 kΩ	
OFF state	< 5 Vdc	
ON state	> 15 Vdc	
Input circuit	Sink	
Input frequency	40 kHz	
Additional functions	<ul style="list-style-type: none"> <li>● 4x time stamping units with time stamp function</li> <li>● 4x input oversampling</li> </ul>	
Input filter	Hardware	≥ 2 μs
	Software	–
Isolation	Between channels and bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### Output Characteristics

The table describes the output characteristics of the TM5SDM8DTS electronic module:

Output characteristics	
Output channels	4 outputs
Wiring type	1 wire
Output current	0.1 A maximum per output
Total output current	0.4 A
Output voltage	24 Vdc
Output voltage range	20.4...28.8 Vdc
Output circuit	Sink and/or source
Output protection	<ul style="list-style-type: none"> <li>● Thermal cutoff for overcurrent and short-circuit</li> <li>● Integrated protection for switching inductances</li> </ul>
Additional functions	<ul style="list-style-type: none"> <li>● 4x edge generation with <math>\mu\text{s}</math> precision</li> <li>● 4x output oversampling</li> </ul>
Voltage drop	< 0.9 V at 0.1 A rated current
Leakage current when switched off	max. 25 $\mu\text{A}$
Turn on time	< 2 $\mu\text{s}$
Turn off time	< 2 $\mu\text{s}$
Automatic rearming after short-circuit or overload	Yes, 10 ms min. depending on internal temperature

### Time Stamping

The table describes the time stamping units characteristics of the TM5SDM8DTS electronic module:

Characteristics	
Number of time stamping units	4
Input frequency (maximum)	40 kHz
Resolution	1 $\mu\text{s}$ time stamp function
Signal form	Square wave pulse
Sensor supply	Module-internal, maximum 600 mA


### Oversampling

The table describes the oversampling characteristics of the TM5SDM8DTS electronic module:

Characteristics	
Number of oversampling units	4
Sample time	125 $\mu$ s, 250 $\mu$ s, 500 $\mu$ s depending on Sercos cycle time

### Switching Inductive Loads

The curves below provide the switching inductive load characteristics for the TM5SDM8DTS electronic module.

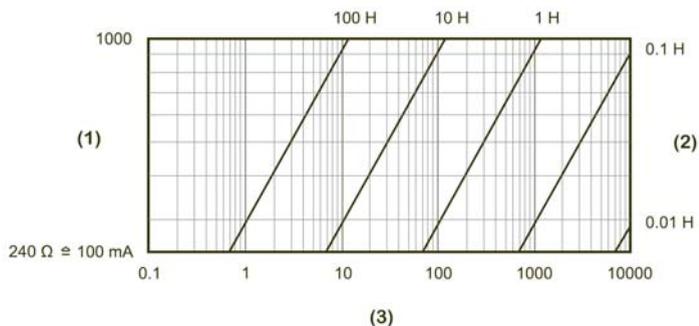


- 1 Load resistance in  $\Omega$
- 2 Load inductance
- 3 Maximum operating cycles / second (with 90% duty cycle)

## TM5SDM8DTS Wiring Diagram

### Wiring Diagram

The following illustration presents the wiring diagram for the TM5SDM8DTS:

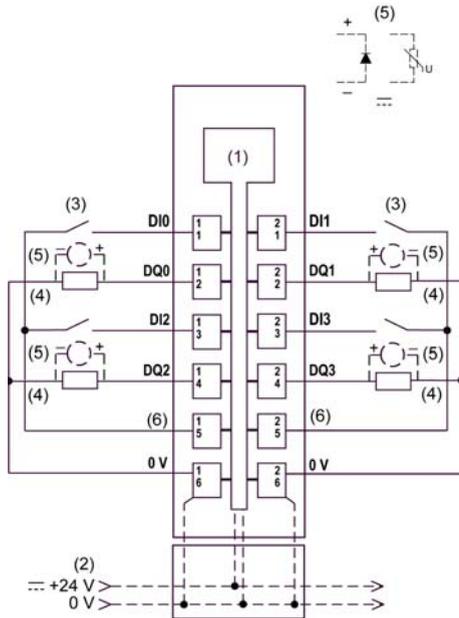

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 2-wire sensor
- 4 2-wire load
- 5 Inductive load protection
- 6 24 Vdc for sensor supply

**NOTE:** I/O electronic modules and the field devices connected to them must all reside on the same 24 Vdc I/O power segment. If not, the status LEDs may not function correctly. In addition, there may potentially be more significant consequences such as an explosion and/or fire hazard.

 **WARNING**

**POTENTIAL EXPLOSION OR FIRE**

Connect the returns from the devices to the same power source as the 24 Vdc I/O power segment serving the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Use the sensor and actuator power supply only for supplying power to sensors or actuators connected to the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

---

# Chapter 23

## TM5SDM12DT Electronic Module 8DI/4DO 24 Vdc Tr 0.5 A 1 Wire

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SDM12DT Presentation	210
TM5SDM12DT Characteristics	213
TM5SDM12DT Wiring Diagram	217

## TM5SDM12DT Presentation


### Main Characteristics

The table below describes the main characteristics of the TM5SDM12DT electronic module:

Main Characteristics	
Number of input channels	8
Input type	Type 1
Input signal type	Sink
Number of output channels	4
Output type	Transistor
Output signal type	Source
Output current	0.5 A max.
Rated input voltage	24 Vdc

### Ordering Information

The illustration below shows the TM5SDM12DT:

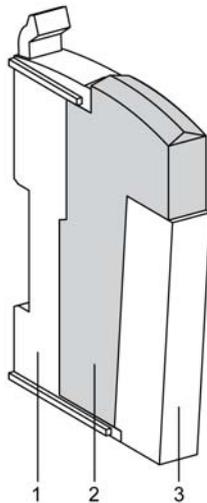


The table below shows the model numbers for the terminal block and the bus bases associated with the TM5SDM12DT:

Number	Model Number	Description	Color
1	TM5ACBM11	Bus base	White
	or TM5ACBM15	Bus base with address setting	White
2	TM5SDM12DT	Electronic Module	White
3	TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration describes the LEDs for TM5SDM12DT:

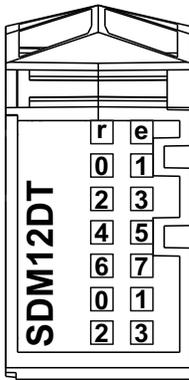

The table below shows the TM5SDM12DT input status LEDs:

LED	Color	Status	Description
r	Green	Off	No power supply
		Single flash	Reset state
		Flashing	Preoperational state
		On	Normal operation
e	Red	Off	OK or no power supply
		Single flash	Error detected on output channels <sup>1</sup>
e+r	Steady red / Single green flash		Invalid firmware

LED	Color	Status	Description
0 - 7	Green	Off	Corresponding input deactivated
		On	Corresponding input activated
0 - 3	Yellow	Off	Corresponding output deactivated
		On	Corresponding output activated
<p><b>NOTE:</b>                      The e LED flashes when detecting one of the following errors on output channels:</p> <ul style="list-style-type: none"> <li>● Short-circuit</li> <li>● Overload</li> <li>● No 24 Vdc Power Segment supply and an output is at logic 1</li> </ul>			

## TM5SDM12DT Characteristics

### Introduction

This is the description characteristics for the TM5SDM12DT electronic module. See also Environmental Characteristics (*see page 27*).

** DANGER**

**FIRE HAZARD**

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

** WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SDM12DT electronic module:

General Characteristics	
Rated power supply voltage	24 Vdc
Power supply source	Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	21 mA (all inputs On)
TM5 Bus 5 Vdc current draw	42 mA
Power dissipation	1.52 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	8377 dec

### Input Characteristics

The table describes the input characteristics of the TM5SDM12DT electronic module:

Input Characteristics		
Number of input channels		8
Wiring type		1 wire
Rated input voltage		24 Vdc
Input voltage range		20.4...28.8 Vdc
De-rating	55...60 °C (131...140 °F)	I = 0.3 A max. by channel
Rated input current at 24 Vdc		3.75 mA
Input impedance		6.4 kΩ
OFF state		5 Vdc max.
ON state		15 Vdc min.
Input filter	Hardware	≤100 μs
	Software	Default 1 ms, can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between channels and bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### Output Characteristics

The table describes the output characteristics of the TM5SDM12DT electronic module:


Output Characteristics	
Output channels	4
Wiring type	1 wire
Output current	0.5 A max. per output
Total output current	2 A max.
Output voltage	24 Vdc
Output voltage range	20.4...28.8 Vdc
De-rating	0.3 A max. by channel

Output Characteristics		
Voltage drop		0.3 Vdc max. at 0.5 A rated current
Leakage current when switched off		5 $\mu$ A
Turn on time		300 $\mu$ s max.
Turn off time		300 $\mu$ s max.
Output protection		Against short-circuit and overload, thermal protection
Short-circuit output peak current		12 A max.
Automatic rearming after short-circuit or overload		Yes, 10 ms min. depending on internal temperature
Protection against reverse polarity		Yes
Clamping voltage		Typ. 50 Vdc
Switching frequency	Resistive load	500 Hz max.
	Inductive load	See the switching inductive load characteristics ( <i>see page 216</i> ).
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### Switching Inductive Loads

The curves below provide the switching inductive load characteristics for the TM5SDM12DT electronic module.

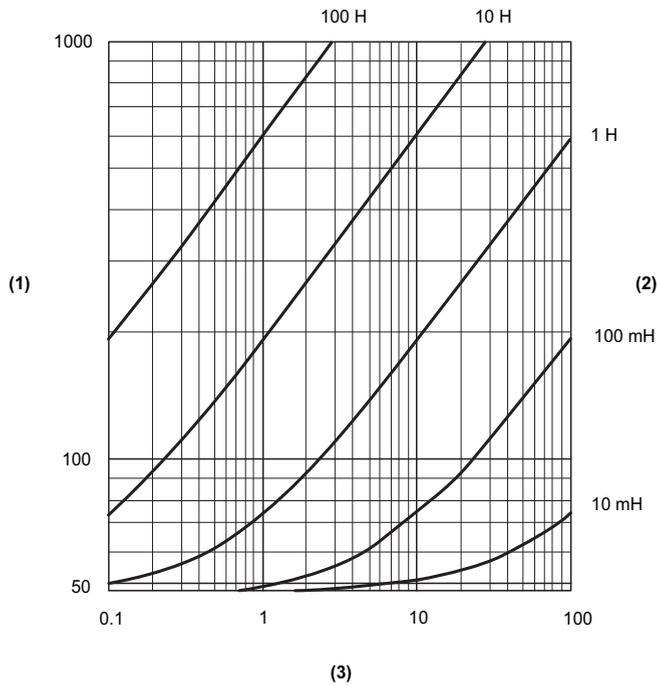


- 1 Load resistance in  $\Omega$
- 2 Load inductance
- 3 Max. operating cycles / second

## TM5SDM12DT Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for the TM5SDM12DT:

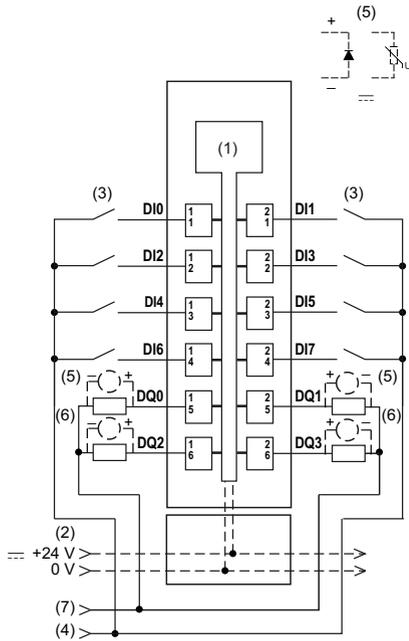

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 2-wire sensor
- 4 24 Vdc I/O power segment by external connection
- 5 Inductive load protection
- 6 2-wire load
- 7 0 Vdc I/O power segment by external connection

**NOTE:** I/O electronic modules and the field devices connected to them must all reside on the same 24 Vdc I/O power segment. If not, the status LEDs may not function correctly. In addition, there may potentially be more significant consequences such as an explosion and/or fire hazard.

## ⚠ WARNING


### POTENTIAL EXPLOSION OR FIRE

Connect the returns from the devices to the same power source as the 24 Vdc I/O power segment serving the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

The 8-input / 4-output TM5SDM12DT electronic module can independently support 1-wire devices. To connect 2-wire devices, you can add TM5SPDD12F and TM5SPDG12F Common Distribution modules.

The following illustration shows the wiring diagram for the TM5SPDD12F, TM5SPDG12F and the TM5SDM12DT:

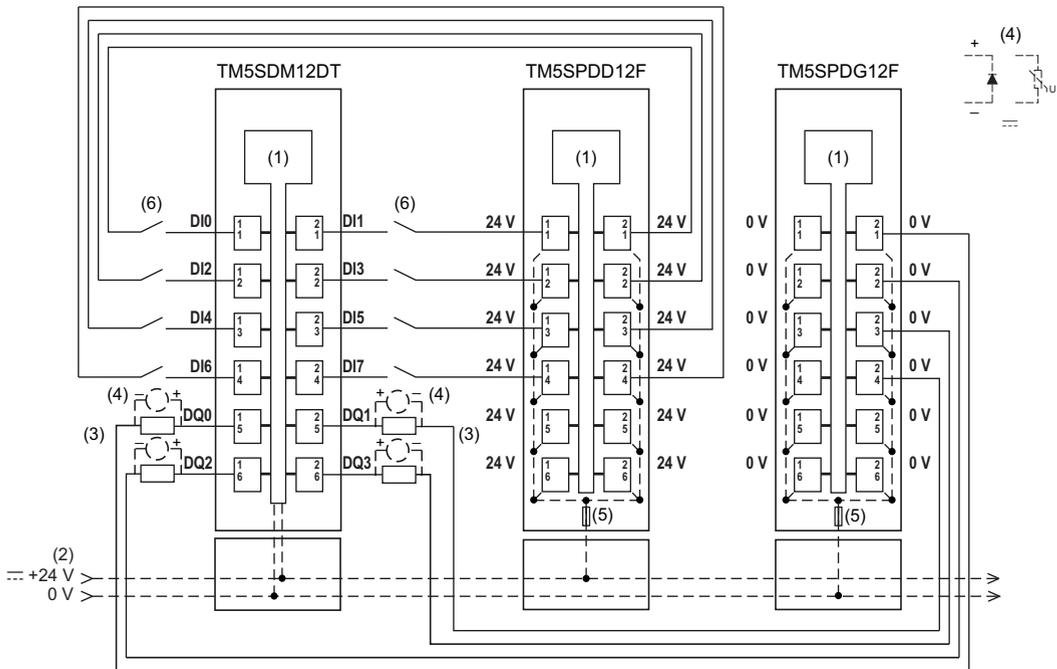

- 1 Internal electronics
- 2 24 Vdc I/O power segment integrated into the bus bases
- 3 2-wire load
- 4 Inductive load protection
- 5 Integrated fuse type T slow-blow 6.3 A 250 V exchangeable
- 6 2-wire sensor

 **WARNING**

**UNINTENDED EQUIPMENT OPERATION**

Do not connect wires to unused terminals and/or terminals indicated as “No Connection (N.C.)”.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**



---

# Chapter 24

## TM5SMM6D2L Electronic Module 4DI/2DO 24Vdc Tr 0.5A / 1AI/1AO $\pm 10V/0-20mA$ 12 Bits

---

### What Is in This Chapter?

This chapter contains the following topics:

Topic	Page
TM5SMM6D2L Presentation	222
TM5SMM6D2L Characteristics	225
TM5SMM6D2L Wiring Diagram	230

## TM5SMM6D2L Presentation

### Main Characteristics


The tables describe the main characteristics of the TM5SMM6D2L electronic module:

Main Characteristics of Digital Input / Output Channels	
Number of digital input channels	4
Number of digital output channels	2
Input type	Type 1
Input signal type	Sink
Rated input voltage	24 Vdc
Output type	Transistor
Output signal type	Source
Output current	0.5 A max.

Main Characteristics of Analog Input / Output Channels		
Number of analog input channels	1	
Number of analog output channels	1	
Signal type	Voltage	Current
Input range	-10...+10 Vdc	0...20 mA / 4...20 mA
Output range	-10...+10 Vdc	0...20 mA
Resolution	12 bits + sign	12 bits

## Ordering Information

The illustration shows the TM5SMM6D2L:

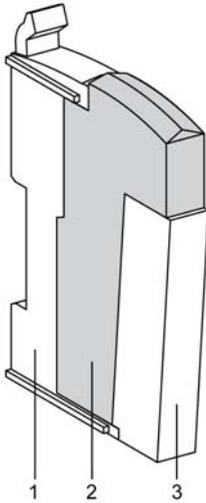


The table shows the model numbers for the terminal block and the bus bases associated with the TM5SMM6D2L:

Number	Reference	Description	Color
1	TM5ACBM11 or TM5ACBM15	Bus base  Bus base with address setting	White  White
2	TM5SMM6D2L	Electronic module	White
3	TM5ACTB12	Terminal block, 12 pins	White

**NOTE:** For more information, refer to *TM5 bus bases and terminal blocks (see Modicon TM5 / TM7 Flexible System, System Planning and Installation Guide)*.

### Status LEDs

The following illustration describes the LEDs for TM5SMM6D2L:

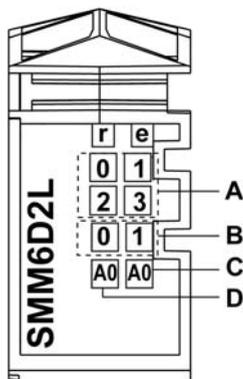

The table shows the TM5SMM6D2L input status LEDs:

Position in Illustration	LED	Color	Status	Description
–	r	Green	Off	No power supply
			Single flash	Reset state
			Flashing	Preoperational state
			On	Normal operation
–	e	Red	Off	OK or no power supply
			Single flash	Error detected on output channels
–	e+r	Steady red / Single green flash		Invalid firmware
A	0 - 3	Green	Off	Corresponding digital input deactivated
			On	Corresponding digital input activated
B	0 - 1	Orange	Off	Corresponding digital output deactivated
			On	Corresponding digital output activated
C	A0	Orange	Off	The value = 0.
			On	The value ≠ 0.
D	A0	Green	Off	The connection is open or the sensor is disconnected.
			Flashing	Overflow or underflow of the input signal
			On	The analog / digital converter is running, the value is OK.

## TM5SMM6D2L Characteristics

### Introduction

This is the description characteristics for the TM5SMM6D2L electronic module. See also Environmental Characteristics (*see page 27*).

### DANGER

#### FIRE HAZARD

- Use only the correct wire sizes for the current capacity of the I/O channels and power supplies.
- For relay output (2 A) wiring, use conductors of at least 0.5 mm<sup>2</sup> (AWG 20) with a temperature rating of at least 80 °C (176 °F).
- For common conductors of relay output wiring (7 A), or relay output wiring greater than 2 A, use conductors of at least 1.0 mm<sup>2</sup> (AWG 16) with a temperature rating of at least 80 °C (176 °F).

**Failure to follow these instructions will result in death or serious injury.**

### WARNING

#### UNINTENDED EQUIPMENT OPERATION

Do not exceed any of the rated values specified in the environmental and electrical characteristics tables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### General Characteristics

The table below describes the general characteristics of the TM5SMM6D2L electronic module:

General Characteristics	
Rated power supply voltage Power supply source	24 Vdc Connected to the 24 Vdc I/O power segment
Power supply range	20.4...28.8 Vdc
24 Vdc I/O segment current draw	73 mA (all digital inputs and outputs On)
TM5 Bus 5 Vdc current draw	2 mA
Power dissipation	1.75 W max.
Weight	25 g (0.9 oz)
ID code for firmware update	9411 dec

### Input Characteristics of Digital Channels

The table describes the input characteristics of digital channels of the TM5SMM6D2L electronic module:

Input Characteristics		
Number of input channels		4
Wiring type		1 wire
Rated input voltage		24 Vdc
Input voltage range		20.4...28.8 Vdc
De-rating	Temperature: 55...60°C (131...140°F)	up to 3 inputs simultaneously activated
Rated input current at 24 Vdc		3.3 mA
Input impedance		7.18 kΩ
OFF state		5 Vdc max.
ON state		15 Vdc min.
Input filter	Hardware	≤2 μs
	Software	Default: 1 ms Can be configured between 0 and 25 ms in 0.2 ms intervals.
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### Input Characteristics of Analog Channels

The table describes the input characteristics of analog channels of the TM5SMM6D2L electronic module:

Input Characteristics	Voltage Input	Current Input
Input range	-10...+10 Vdc	0...20 mA / 4...20 mA
Input impedance	1 MΩ min.	–
Load impedance	–	300 Ω max.
Sample duration time	400 μs	

Input Characteristics	Voltage Input	Current Input
Input type	Single ended	
Conversion mode	Successive Approximative Register	
Input filter	Low pass third order / cut-off frequency 1 kHz	
Input tolerance - maximum deviation at ambient 25°C (77°F)	< 0.08% of the measurement	< 0.08% of the measurement
Input tolerance - temperature drift	0.006% / °C of the measurement	0.009% / °C of the measurement
Input tolerance - non linearity	0.02%	0.02%
Digital resolution	12 bits + sign	12 bits
Resolution value	2.441 mV	4.883 µA
Common mode rejection	DC	70 dB min.
	50 Hz	70 dB min.

### Output Characteristics of Digital Channels

The table describes the output characteristics of digital channels of the TM5SMM6D2L electronic module:

Output Characteristics		
Number of Output channels	2	
Wiring type	1 wire	
Output current	0.5 A max. per output	
Total output current	1 A max.	
Output voltage	24 Vdc	
Output voltage range	20.4...28.8 Vdc	
De-rating	Temperature: 55...60°C (131...140°F)	I=0.4 A max. by channel
Voltage drop	0.2 Vdc max. at 0.5 A rated current	
Leakage current when switched off	5 µA	
Turn on time	250 µs max.	
Turn off time	250 µs max.	
Output protection	Against short-circuit and overload, thermal protection	
Short-circuit output peak current	14 A max.	
Automatic rearming after short-circuit or overload	Yes, 10 ms min. depending on internal temperature	
Protection against reverse polarity	Yes	
Clamping voltage	Typ. 50 Vdc	

Output Characteristics		
Switching frequency	Resistive load	100 Hz
	Inductive load	See the switching inductive load characteristics ( <i>see page 229</i> ).
Isolation	Between input and internal bus	See note <sup>1</sup>
	Between channels	Not isolated

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### Output Characteristics of Analog Channels

The table describes the output characteristics of analog channels of the TM5SMM6D2L electronic module:


Output Characteristics	Voltage Output	Current Output
Output range	-10...+10 Vdc	0...20 mA
Output impedance	1 k $\Omega$ min. (0...55°C (32...131°F)), 10 k $\Omega$ min. (55...60°C (131...140°F))	–
Load impedance	–	400 $\Omega$ max. (0...55°C (32...131°F)), >300 $\Omega$ max. (55...60°C (131...140°F))
Conversion time	300 $\mu$ s	
Response time for output change	1 ms max.	
Output tolerance - maximum deviation at ambient 25°C (77°F)	< 0.15% of the measurement	
Output tolerance - temperature drift	0.02% / °C of the measurement	
Output tolerance - non linearity	< 0.1% of the measurement	
Output tolerance - maximum deviation caused by load change	0.02% from 10 M $\Omega$ to 1 k $\Omega$ , resistive	0.5% from 1 $\Omega$ to 500 $\Omega$ , resistive
Digital resolution	12 bits + sign	12 bits
Resolution value	2.441 mV	4.882 $\mu$ A
Noise resistance - cable	Shielded cable is necessary	
Isolation between channels	Not isolated	

Output Characteristics	Voltage Output	Current Output
Isolation between channels and bus	See note <sup>1</sup>	
Output protection	Short-circuit protection: current limitation is 50 mA	

<sup>1</sup> The isolation of the electronic module is 500 Vac RMS between the electronics powered by the TM5 bus and those powered by 24 Vdc I/O power segment connected to the module. In practice, the TM5 electronic module is installed in the bus base, and there is a bridge between the TM5 power bus and the 24 Vdc I/O power segment. The two power circuits reference the same functional ground (FE) through specific components designed to reduce effects of electromagnetic interference. These components are rated at 30 Vdc or 60 Vdc. This effectively reduces isolation of the entire system from the 500 Vac RMS.

### Switching Inductive Loads

The curves provide the switching inductive load characteristics for the TM5SMM6D2L electronic module.

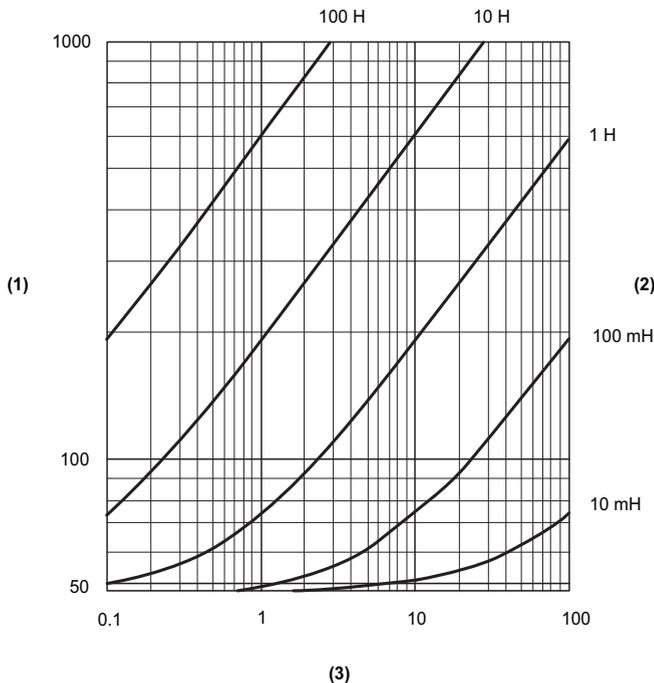


- 1 Load resistance in  $\Omega$
- 2 Load inductance
- 3 Max. operating cycles / second

## TM5SMM6D2L Wiring Diagram

### Wiring Diagram

The following illustration shows the wiring diagram for TM5SMM6D2L:

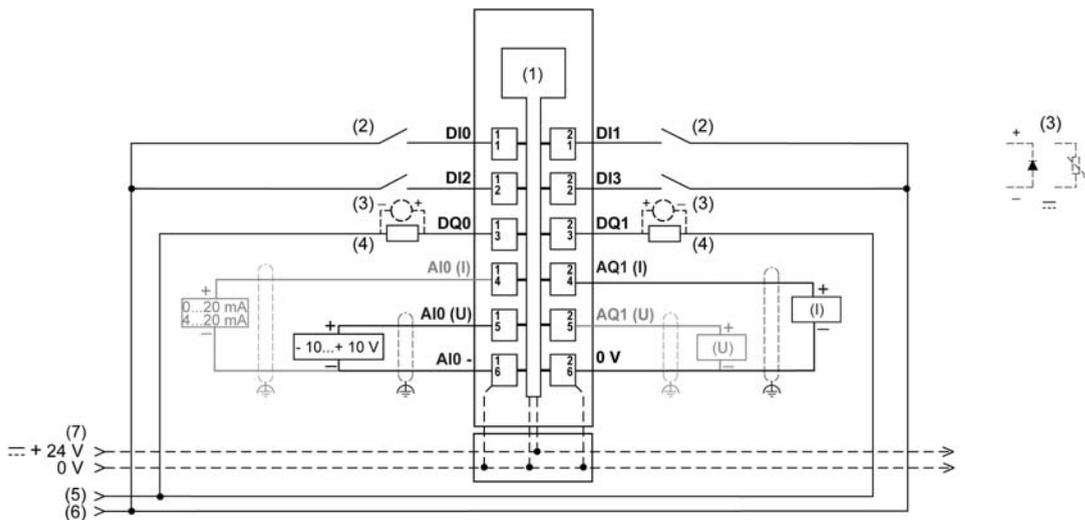

- 1 internal electronics
- 2 2-wire sensor
- 3 inductive load protection
- 4 2-wire load
- 5 0 Vdc I/O power segment by external connection
- 6 24 Vdc I/O power segment by external connection
- 7 24 Vdc I/O power segment integrated into the bus bases
- I current
- U voltage

## ⚠ WARNING

### UNINTENDED EQUIPMENT OPERATION

Do not connect wires to unused terminals and/or terminals indicated as "No Connection (N.C.)".

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

### Specific Information for Digital Inputs

**NOTE:** I/O electronic modules and the field devices connected to them must all reside on the same 24 Vdc I/O power segment. If not, the status LEDs may not function correctly. In addition, there may potentially be more significant consequences such as an explosion and/or fire hazard.

## **WARNING**

### **POTENTIAL EXPLOSION OR FIRE**

Connect the returns from the devices to the same power source as the 24 Vdc I/O power segment serving the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

The 4-digital input TM5SMM6D2L electronic module can independently support 1-wire devices. To connect 2-wire devices, you can add a TM5SPDD12F Common Distribution module.

### **Specific Information for Analog Inputs**

Use shielded, properly grounded cables for all analog and high-speed inputs or outputs and communication connections. If you do not use shielded cable for these connections, electromagnetic interference can cause signal degradation. Degraded signals can cause the controller or attached modules and equipment to perform in an unintended manner.

## **WARNING**

### **UNINTENDED EQUIPMENT OPERATION**

- Use shielded cables for all fast I/O, analog I/O and communication signals.
- Ground cable shields for all analog I/O, fast I/O and communication signals at a single point<sup>1</sup>.
- Route communication and I/O cables separately from power cables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

<sup>1</sup>Multipoint grounding is permissible if connections are made to an equipotential ground plane dimensioned to help avoid cable shield damage in the event of power system short-circuit currents.

## ***NOTICE***

### **INOPERABLE EQUIPMENT**

Verify that the physical wiring of the analog circuit is compatible with the software configuration for the analog channel.

**Failure to follow these instructions can result in equipment damage.**

### Specific Information for Digital Outputs

**NOTE:** I/O electronic modules and the field devices connected to them must all reside on the same 24 Vdc I/O power segment. If not, the status LEDs may not function correctly. In addition, there may potentially be more significant consequences such as an explosion and/or fire hazard.

## WARNING

### POTENTIAL EXPLOSION OR FIRE

Connect the returns from the devices to the same power source as the 24 Vdc I/O power segment serving the module.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

The 2-digital output TM5SMM6D2L electronic module can independently support 1-wire devices. To connect 2-wire devices, you can add a TM5SPDG12F Common Distribution module.

### Specific Information for Analog Output

Use shielded, properly grounded cables for all analog and high-speed inputs or outputs and communication connections. If you do not use shielded cable for these connections, electromagnetic interference can cause signal degradation. Degraded signals can cause the controller or attached modules and equipment to perform in an unintended manner.

## WARNING

### UNINTENDED EQUIPMENT OPERATION

- Use shielded cables for all fast I/O, analog I/O and communication signals.
- Ground cable shields for all analog I/O, fast I/O and communication signals at a single point<sup>1</sup>.
- Route communication and I/O cables separately from power cables.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

<sup>1</sup>Multipoint grounding is permissible if connections are made to an equipotential ground plane dimensioned to help avoid cable shield damage in the event of power system short-circuit currents.

## *NOTICE*

### INOPERABLE EQUIPMENT

Verify that the physical wiring of the analog circuit is compatible with the software configuration for the analog channel.

**Failure to follow these instructions can result in equipment damage.**



## !

%

According to the IEC standard, % is a prefix that identifies internal memory addresses in the logic controller to store the value of program variables, constants, I/O, and so on.

## A

### **analog input**

Converts received voltage or current levels into numerical values. You can store and process these values within the logic controller.

### **analog output**

Converts numerical values within the logic controller and sends out proportional voltage or current levels.

## B

### **bus base**

A mounting device that is designed to seat an electronic module on a DIN rail and connect it to the TM5 bus for M258 and LMC058 logic controllers. Each base bus extends the integrated TM5 data and electronic power buses as well as the 24 Vdc I/O power segment. The electronic modules are added to the TM5 system through their insertion on the base bus.

## C

### **CAN**

(*controller area network*) A protocol (ISO 11898) for serial bus networks, designed for the interconnection of smart devices (from multiple manufacturers) in smart systems and for real-time industrial applications. Originally developed for use in automobiles, CAN is now used in a variety of industrial automation control environments.

### **CANopen**

An open industry-standard communication protocol and device profile specification (EN 50325-4).

### **control network**

A network containing logic controllers, SCADA systems, PCs, HMI, switches, ...

Two kinds of topologies are supported:

- flat: all modules and devices in this network belong to same subnet.
- 2 levels: the network is split into an operation network and an inter-controller network.

These two networks can be physically independent, but are generally linked by a routing device.

**controller**

Automates industrial processes (also known as programmable logic controller or programmable controller).

**CSA**

(*Canadian standards association*) The Canadian standard for industrial electronic equipment in hazardous environments.

**D**

**DIN**

(*Deutsches Institut für Normung*) A German institution that sets engineering and dimensional standards.

**E**

**electronic module**

In a programmable controller system, most electronic modules directly interface to the sensors, actuators, and external devices of the machine/process. This electronic module is the component that mounts in a bus base and provides electrical connections between the controller and the field devices. Electronic modules are offered in a variety of signal levels and capacities. (Some electronic modules are not I/O interfaces, including power distribution modules and transmitter/receiver modules.)

**element**

The short name of the ARRAY element.

**EN**

EN identifies one of many European standards maintained by CEN (*European Committee for Standardization*), CENELEC (*European Committee for Electrotechnical Standardization*), or ETSI (*European Telecommunications Standards Institute*).

**encoder**

A device for length or angular measurement (linear or rotary encoders).

**equipment**

A part of a machine including sub-assemblies such as conveyors, turntables, and so on.

**Ethernet**

A physical and data link layer technology for LANs, also known as IEEE 802.3.

---

## F

### FAST I/O

*FAST input/output* Specific I/O modules with some electrical features (for example, response time) while the treatment of these channels are done directly by the controller

### firmware

Represents the BIOS, data parameters, and programming instructions that constitute the operating system on a controller. The firmware is stored in non-volatile memory within the controller.

### function

A programming unit that has 1 input and returns 1 immediate result. However, unlike FBs, it is directly called with its name (as opposed to through an instance), has no persistent state from one call to the next and can be used as an operand in other programming expressions.

Examples: boolean (AND) operators, calculations, conversions (BYTE\_TO\_INT)

## H

### hot swapping

The replacement of a component with a like component while the system remains under power and operational. The replacement component begins to function automatically after it is installed.

## I

### I/O

*(input/output)*

### ID

*(identifier/identification)*

### IEC

*(international electrotechnical commission)* A non-profit and non-governmental international standards organization that prepares and publishes international standards for electrical, electronic, and related technologies.

### input filter

A special function that helps reject extraneous signals on input lines due to such things as contact bounce and inducted electrical transients. Inputs provide a level of input filtering using the hardware. Additional filtering with software is also configurable through the programming or the configuration software.

### IP 20

*(ingress protection)* The protection classification according to IEC 60529 offered by an enclosure, shown by the letter IP and 2 digits. The first digit indicates 2 factors: helping protect persons and for equipment. The second digit indicates helping protect against water. IP 20 devices help protect against electric contact of objects larger than 12.5 mm, but not against water.

## L

### LED

(*light emitting diode*) An indicator that illuminates under a low-level electrical charge.

## M

### machine

Consists of several *functions* and/or *equipment*.

### ms

(*millisecond*)

## N

### network

A system of interconnected devices that share a common data path and protocol for communications.

## P

### PCI

(*peripheral component interconnect*) An industry-standard bus for attaching peripherals.

### PDM

(*power distribution module*) A module that distributes either AC or DC field power to a cluster of I/O modules.

## R

### RPDO

(*receive process data object*) An unconfirmed broadcast message or sent from a producer device to a consumer device in a CAN-based network. The transmit PDO from the producer device has a specific identifier that corresponds to the receive PDO of the consumer devices.

**T****terminal block**

*(terminal block)* The component that mounts in an electronic module and provides electrical connections between the controller and the field devices.

**TPDO**

*(transmit process data object)* An unconfirmed broadcast message or sent from a producer device to a consumer device in a CAN-based network. The transmit PDO from the producer device has a specific identifier that corresponds to the receive PDO of the consumer devices.

**U****UL**

*(underwriters laboratories)* A US organization for product testing and safety certification.





## E

- Electronic modules
  - documentation references, *29*
  - installation, *29*
- environmental characteristics, *27*

## G

- General characteristics
  - TM5SDI2DF, *80*

## H

- hot swapping, *30*

## I

- installation and Maintenance
  - installation and Maintenance requirements, *18*

## P

- Presentation
  - TM5SDO12T, *154*
  - TM5SDO16T, *164*
  - TM5SDO2R, *174*
  - TM5SDO2S, *190*
  - TM5SDO2T, *106*
  - TM5SDO4R, *182*
  - TM5SDO4T, *116*
  - TM5SDO4TA, *126*
  - TM5SDO6T, *136*
  - TM5SDO8TA, *144*

## T

- TM5 digital
  - TM5SDI12D, *61*
  - TM5SDI16D, *69*
  - TM5SDI2A, *85*
  - TM5SDI2D, *41*
  - TM5SDI4A, *91*
  - TM5SDI4D, *47*
  - TM5SDI6D, *53*
  - TM5SDI6U, *97*
  - TM5SDM12DT, *209*
  - TM5SDM8DTS, *199*
  - TM5SDO12T, *153*
  - TM5SDO16T, *163*
  - TM5SDO2R, *173*
  - TM5SDO2S, *189*
  - TM5SDO2T, *105*
  - TM5SDO4R, *181*
  - TM5SDO4T, *115*
  - TM5SDO4TA, *125*
  - TM5SDO6T, *135*
  - TM5SDO8TA, *143*
  - TM5SMM6D2L, *221*

TM5 expert  
    TM5SDI2DF, *77*  
TM5SDI12D, *61*  
TM5SDI16D, *69*  
TM5SDI2A, *85*  
TM5SDI2D, *41*  
TM5SDI2DF, *77*  
TM5SDI4A, *91*  
TM5SDI4D, *47*  
TM5SDI6D, *53*  
TM5SDI6U, *97*  
TM5SDM12DT, *209*  
TM5SDM8DTS, *199*  
TM5SDO12T, *153*  
TM5SDO16T, *163*  
TM5SDO2R, *173*  
TM5SDO2S, *189*  
TM5SDO2T, *105*  
TM5SDO4R, *181*  
TM5SDO4T, *115*  
TM5SDO4TA, *125*  
TM5SDO6T, *135*  
TM5SDO8TA, *143*  
TM5SMM6D2L, *221*

## W

Wiring Diagram  
    TM5SDM12DT, *217*  
    TM5SDM8DTS, *207*  
    TM5SDO12T, *160*  
    TM5SDO16T, *170*  
    TM5SDO2DS, *194*  
    TM5SDO2R, *179*  
    TM5SDO2T, *112*  
    TM5SDO4R, *187*  
    TM5SDO4T, *122*  
    TM5SDO4TA, *132*  
    TM5SDO6T, *142*  
    TM5SDO8TA, *151*  
    TM5SMM6D2L, *230*  
wiring rules, *21*