

SBLT500 / SBTT500


561144/561145

UL 1059
 • 1000V AC/DC
 • Short-Circuit Current Rating †
 100 kA @ 600V


CE IEC 60947-7-1
 Ui: 1000V AC / 1500V DC
 Uimp: 12 kV
 Ipk: 52 kA*
 Icw: 28,8 kA rms 1s*

561144 : SBLT500

IEC : 750 AMP / UL : 500 AMP / CSA : 500 AMP

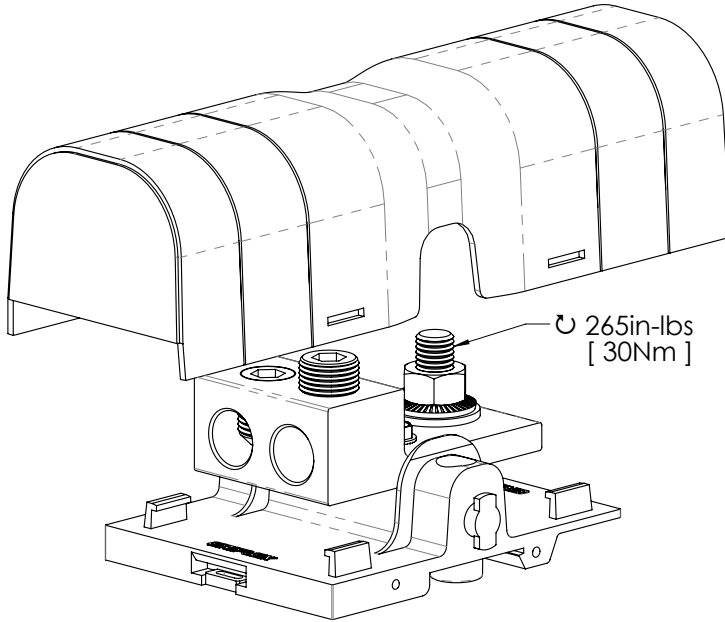


Ø	UL	IEC	IEC only	QTY	STRIP LENGTH	⌚
.600 in	6...250 AWG	-		X2	1.2 in	168 in-lbs
15.3 mm	16...120 mm²	16...120 mm²			30.0 mm	19 N-m

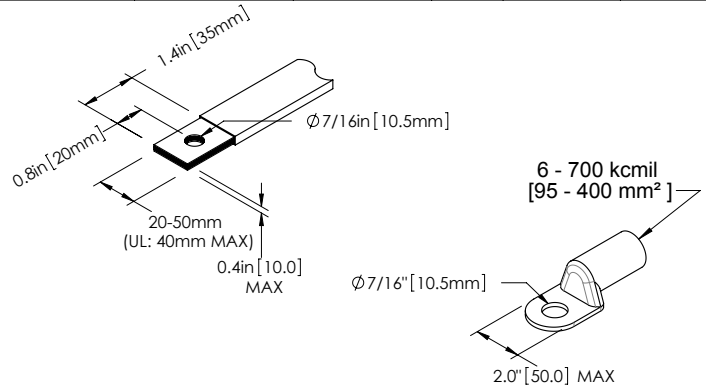

561145 : SBTT500

IEC : 750 AMP / UL : 500 AMP / CSA : 500 AMP

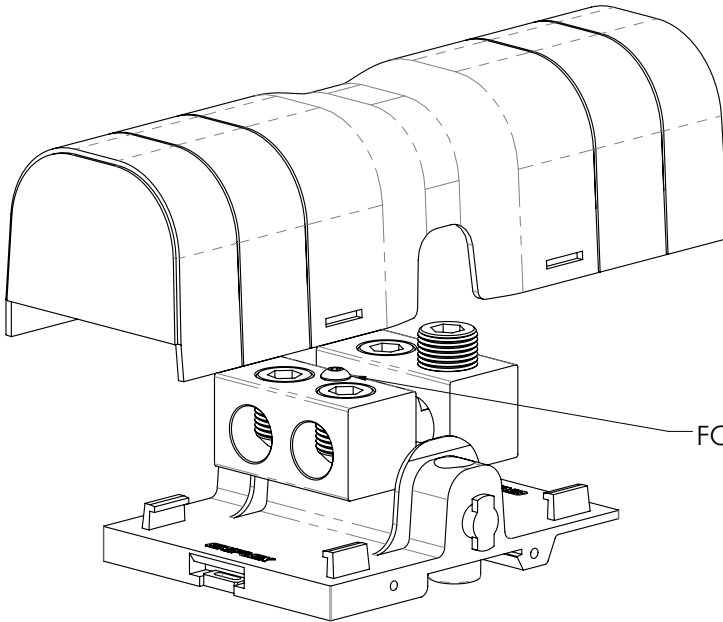

Ø	UL	IEC	IEC only	QTY	STRIP LENGTH	⌚
.60 in	6...250 AWG	-		X2	1.2 in	168 in-lbs
15.3 mm	16...120 mm²	16...120 mm²			30.0 mm	19 N-m

Notes:

- * For IEC Short-Circuit applications the cable must be secured within 20cm of the terminal block
- † See UL file E198301 for UL 1059SA Short-Circuit current rating conditions
- § IEC current produced a temperature rise of less than 45K when used with appropriate and adequate cable(s)

WARNING:

1. nVent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at www.nVent.com and from your nVent customer service representative.
2. nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.

SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed.
 Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

nVent, CADDY, ERICO CADWELD, ERICO CRITEC, ERICO, ERIFLEX, and LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

cULus is a registered Recognized Component Mark of Underwriters Laboratories, Inc.
 UL is a registered trademark of Underwriters Laboratories, Inc.
 IEC is a registered trademark of International Electrotechnical Commission
 CSA mark is a registered trademark of CSA Group Certification & Testing Inc.,


SBLT500 / SBTT500

561144/561145



1/4" [M6]
 ⌚ 30 in-lbs [3.5N-m]



2.600 [66.0]
 .750 [19.1]

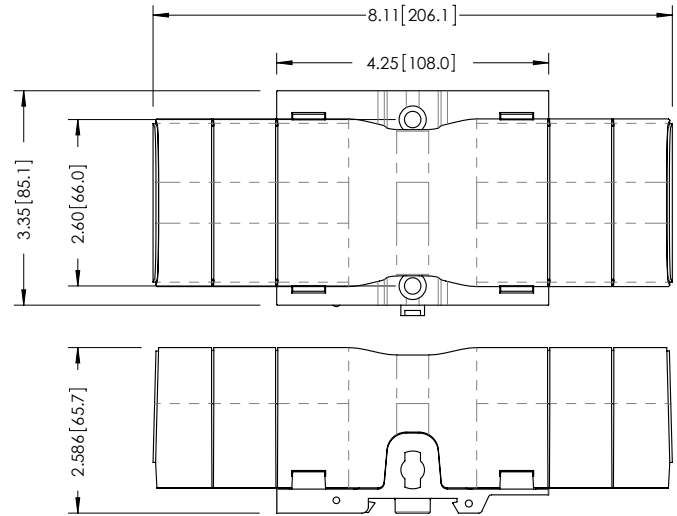

Easy Side-by-Side attachment

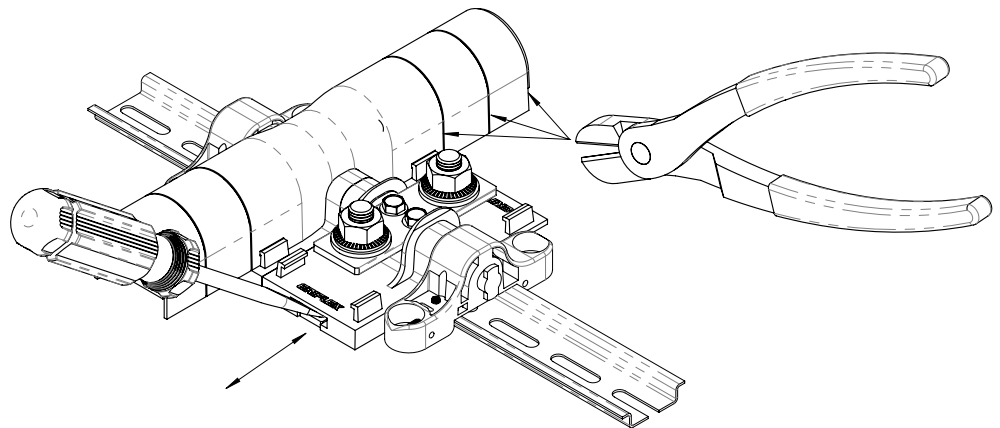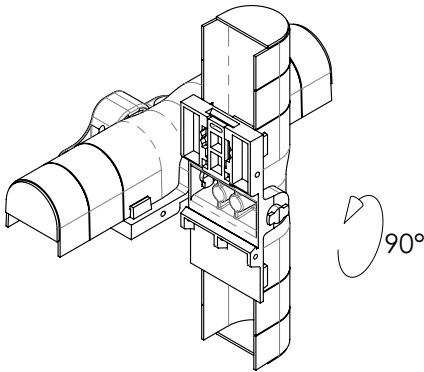

Clips lock in the out position for easier installation and removal


- Must be pushed in when installed on DIN profile

NOTE:

1. For multiple phase assemblies, join blocks together before installing on DIN profile
2. When mounted on DIN profile end stops must be used on both ends of a set of blocks.

ACCESSORIES

561138 : SBLEC - END STOP

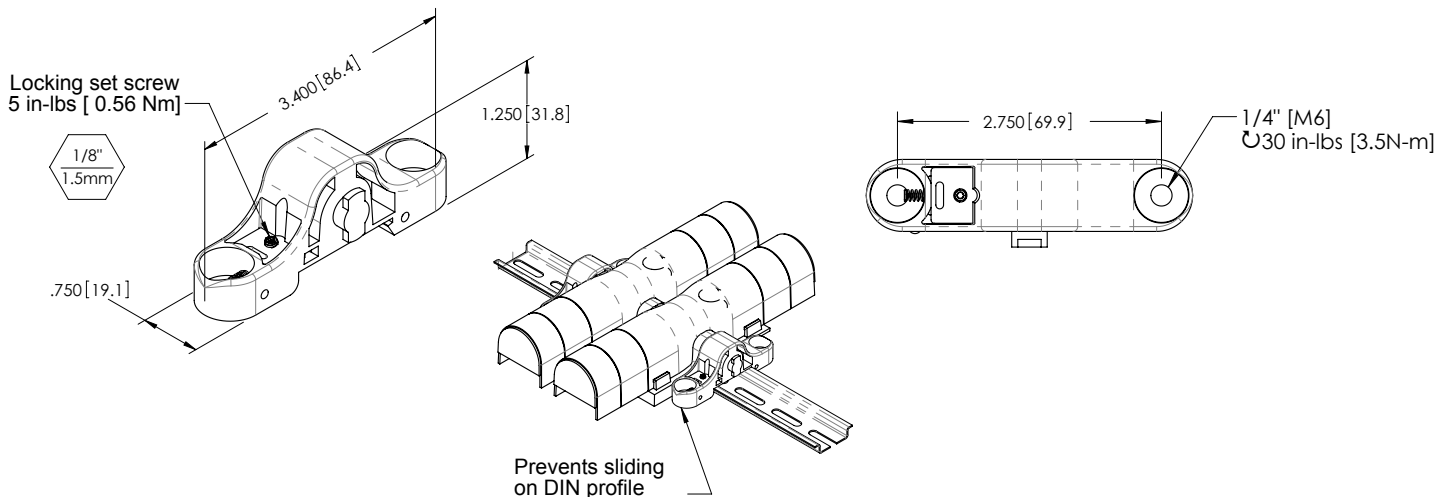

nVent, CADDY, ERICO CADWELD, ERICO CRITEC, ERICO, ERIFLEX, and LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.