


UD250A/UD400A

569040/569050


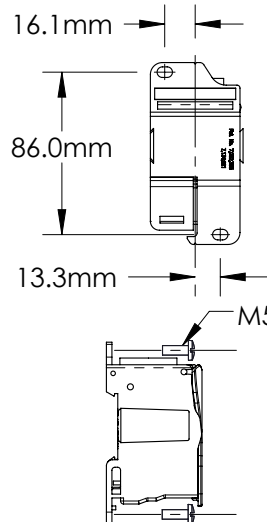


UD250A		
Size	Torque	Strip Length
 OR 		
35...120mm ²	19.0N.m	26.4mm

Size (5X)	Torque	Strip Length
 OR 		
2.5...16mm ²	2.7N.m	10.2mm
Size (4X)	Torque	Strip Length
 OR 		
2.5...10mm ²	2.7N.m	9.8mm

NOTE:

1. Tighten screws of all unused galleries to the specified torque above.
2. For multiple phase assemblies, join blocks together before installing on DIN Profile.
3. When protected by 200 ampere Class J or T fuse, this terminal block is rated for use on a circuit capable of delivering no more than 100kArms symmetrical amperes, 600 volts maximum.
4. The conduit ends shall be provided with a plastic conduit bushing.




UD400A		
Size	Torque	Strip Length
 OR 		
95...185mm ²	25.0N.m	26.4mm

Size (2X)	Size (2X)	Torque	Strip Length
 OR 	 OR 		
6...25mm ²	6...35mm ²	4.4N.m	15.9mm

CE IEC® 60947-7-1

UD250A 569040	UD400A 569050
I = 269A	I = 400A
Ui = 1000V AC/DC Uimp = 12kV Ipk = 51kA Icw = 24.5kA rms @ 1 sec	

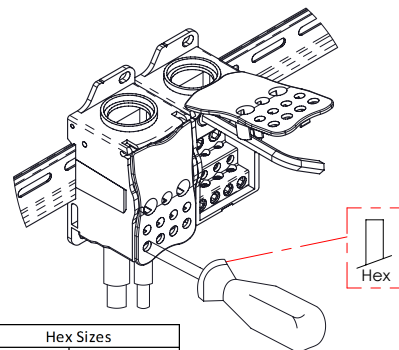

Hex Sizes	
UD250A 569040	UD400A 569050
3,4,5,8 mm	3,4,5,10 mm

WARNING:

1. nVent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at www.nVent.com and from your nVent customer service representative.
2. nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.

SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed.
Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

nVent, CADDY, ERICO CADWELD, ERICO CRITEC, ERICO, ERIFLEX, and LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

IEC is a registered trademark of International Electrotechnical Commission

TECHNICAL SUPPORT
www.nVent.com

IP7804_R

1 OF 2

© 2004-2019 nVent All Rights Reserved

UD250A/UD400A

569040/569050

*For Short Circuit Current Rating up to 100kA see UL file E198301


NOTE:

1. Tighten screws of all unused galleries to the specified torque above.
2. For multiple phase assemblies, join blocks together before installing on DIN Profile.
3. When protected by 200 ampere Class J or T fuse, this terminal block is rated for use on a circuit capable of delivering no more than 100kArms symmetrical amperes, 600 volts maximum.
4. The conduit ends shall be provided with a plastic conduit bushing.




cUL^{us} UL¹⁰⁵⁹


0.63"



0.52"




UD250A		
Size*	Torque	Strip Length
6...250 MCM AWG	168.0 in-lbs	1.04 in



UD400A		
Size*	Torque	Strip Length
3/0...400 MCM AWG	221.0 in-lbs	1.04 in


Size*(5X)	Torque	Strip Length
8...4 AWG	24.0 in-lbs	0.40 in
Size*(4X)	Torque	Strip Length
8...6 AWG	24.0 in-lbs	0.39 in



Size*(2X)	Torque	Strip Length
8...1 AWG	39.0 in-lbs	0.63 in

Hex Sizes	
UD250A 569040	UD400A 569050
3,4,5,8 mm	3,4,5,10 mm

UD250A 569040	UD400A 569050
I = 255A	I = 335A
600V AC/DC	

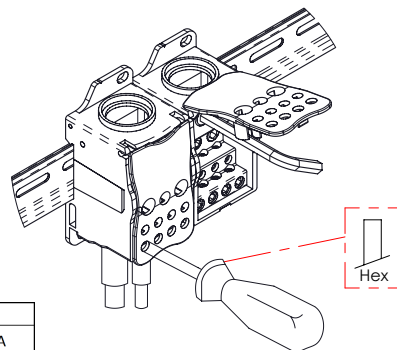

cURus is a registered Recognized Component Mark of Underwriters Laboratories, Inc.
UL is a registered trademark of Underwriters Laboratories, Inc.
CSA mark is a registered trademark of CSA Group Certification & Testing Inc.,

WARNING:

1. nVent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at www.nVent.com and from your nVent customer service representative.
2. nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.

SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed.
Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

nVent, CADDY, ERICO CADWELD, ERICO CRITEC, ERICO, ERIFLEX, and LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.



TECHNICAL SUPPORT
www.nVent.com

IP7804_R

2 OF 2

© 2004-2019 nVent All Rights Reserved

