

Item Nr.:
ECODIM.13 INLINE ZIGBEE

⚠ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Turn off all power supplying this equipment
- Use a voltage tester of appropriate rating.

Failure to follow these instructions will result in death or serious injury.

⚠ WARNING


HAZARD OF FIRE

Failure to follow these instructions can result in death, serious injury, or equipment damage.

SPECS

Rated input voltage:	220-240Vac, 50/60Hz
Power range:	5-250W @ 220-240V LED 10-250W @ 220-240V INC, HAL
Type of load:	LED Retrofit I Incandescent-halogen
Dimming:	APP Control / Voice Control
Ambient temperature (Ta):	-10 C ~ +40 C
Dimension:	79.85*47.75*27mm
Item weight:	70.6g
Protection:	Overload (300W)

WIRING

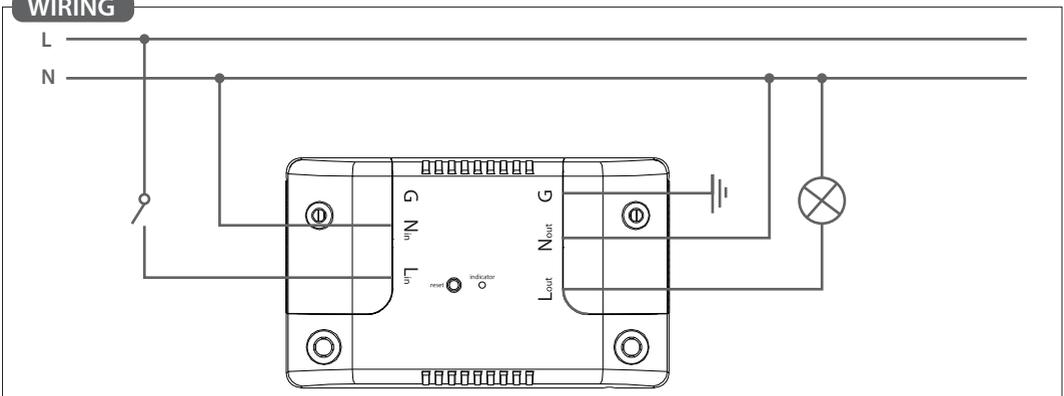

COMPATIBLE HUB

- Homey
- SmartThings
- Philips Hue
- Google Home
- Amazon Alexa
- Wink
- Homee
- Futurehome
- Aduro Smart
- Trust Smart Home

SUPPORT ZIGBEE CLUSTER

1) Input Cluster

- 0x0000: Basic
- 0x0003: Identify
- 0x0004: Groups
- 0x0005: Scenes
- 0x0006
- 0x0008
- 0x0b05

2) Output Cluster

- 0x0019: OTA

OPERATION

1. Minimum Brightness Setting

Press the reset button twice and hold then release till the connected light blink once, push the button again to adjust the brightness, double press to confirm and exit, timeout 1 min.

2. Zigbee Setting

Settings	Step	From Reset Button	From External Switch
Include to the network	1	Remove the device from a previous Zigbee network	If it has already been added to
	2	Press reset button for 3 times. The connected light will step up and down for 3 times, indicator starts blinking blue and stay solid for 10s when Succeeds, timeout 15mins.	Press the connected switch for 3 cycles on/off. The connected light will step up and down for 3 times when succeed.
Reset All configuration will be reset after the device is reset or removed from the network.	1	Press the reset button for 9 times, till the indicator stays in red for 10s.	Press the connected switch for 9 cycles on/off, the connected light will step up and down for 10 times when succeed
	1	Press the reset button for 5 times. The connected light will step up and down for 5 times, indicator starts blinking and stays solid for 10s when pairing is succeeds. Time out 3 mins.	Press the connected switch for 5 cycles on/off. The connected light will step up and down for 5 times when succeed.
TouchLink If the device is on a ZigBee network, remove the device before enabling TouchLink.	2	Bring the remote within 10cm of the smart dimmer and set the remote into TouchLink commissioning. The connected light will blink 10 times when TouchLink succeeds and the indicator stay solid for 10s .	
	Note: a. When both devices (Dimmer and remote) are not included in the Zigbee Network, each dimmer can link with one remote max. b. When both devices are included in the same Zigbee network, each dimmer can link with max 30 remotes.		
Find and Bind Make sure the device and remote are added to the same Zigbee network.	1	Press the reset button for 7 times, The connected light will step up and down for 7 times, indicator starts blinking, time out 3 mins.	Press the connected switch for 7 cycles on/off. The connected light will step up and down for 7 times when succeed
	2	Set the remote into find and bind mode and enable it to find and bind commissioning. Please refer to the manual for instructions.	