


A Alert Alight DL112H




DL112HV2 ae&t commercial ref
DL112H e2s factory reference

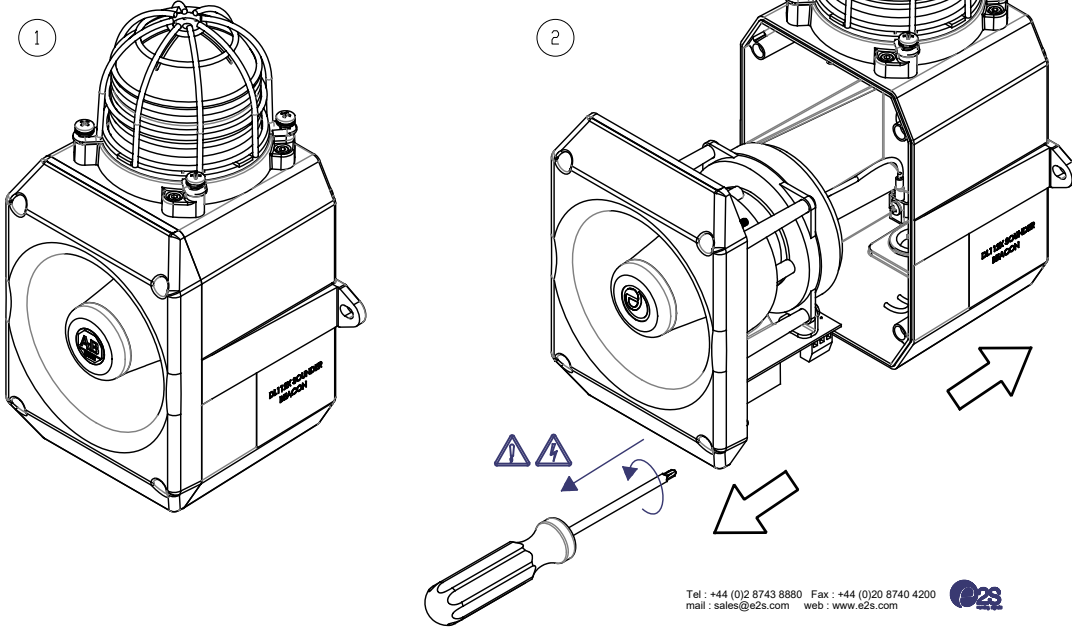


Tel : +44 (0)2 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com



C

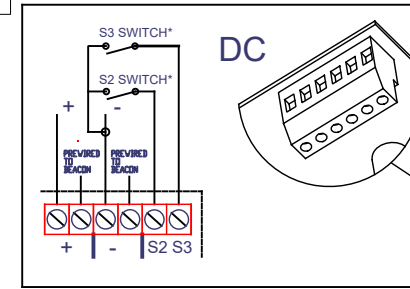


TERMINAL BLOCK	A/C INPUT	D/C INPUT
N/-	N~	-
L/+	L~	+
S2	SWITCH TO C	SWITCH TO -
S3	SWITCH TO C	SWITCH TO -

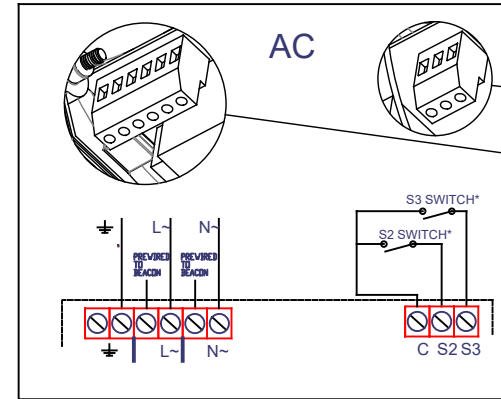



*S2 & S3 Denote Stage 2 & Stage 3 respectively
Stage switches are customer supplied




5 CONNECT CABLE AS SHOWN

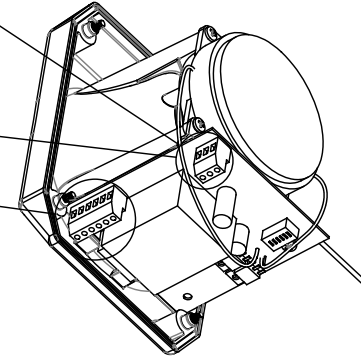

B

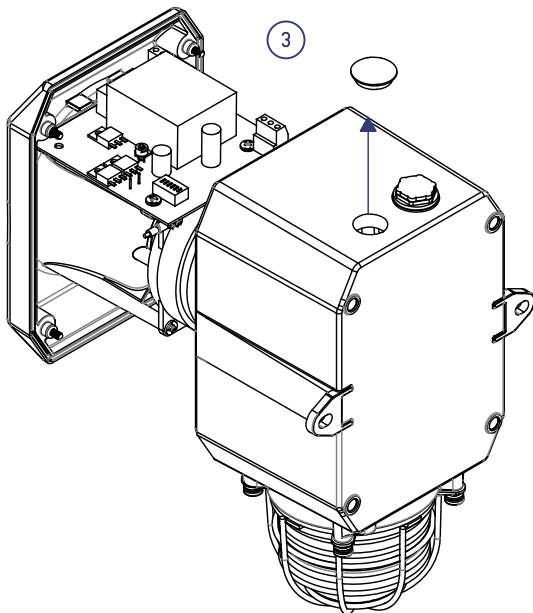

4 INSERT CABLE THROUGH SUITABLY SIZED M20 CABLE GLAND, CUSTOMER SUPPLIED, THEN STRIP CABLE TO LENGTH.

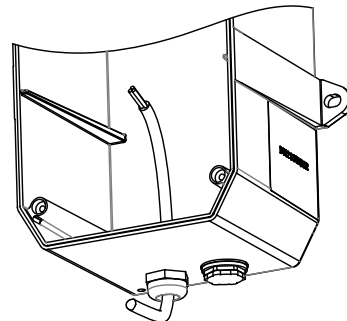


Dimensions in mm



D

RELATED DRAWING
No modification permitted without reference to "The Authorised Person"

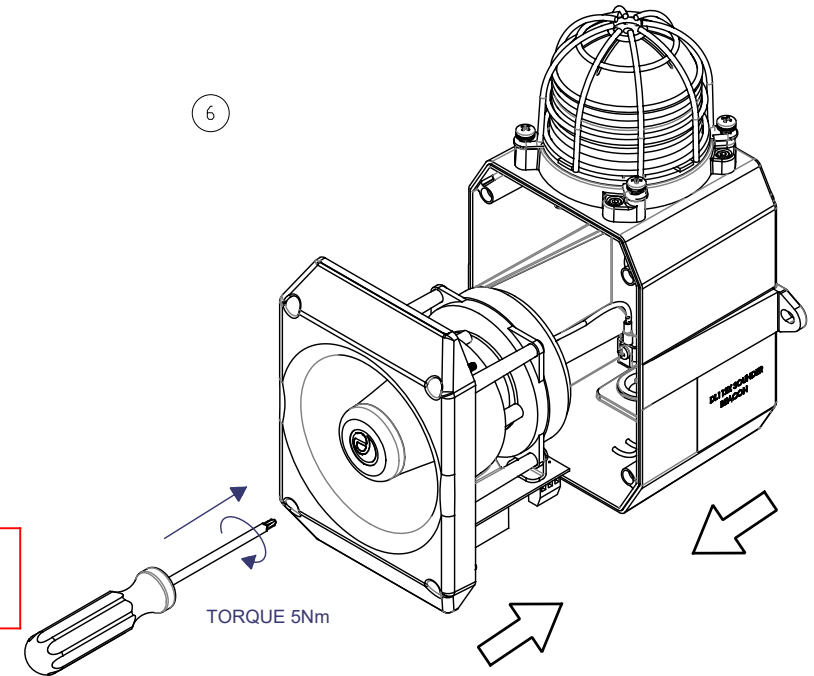

TORQUE 5Nm



A

AlertAlight




DL112H Metal Sounder LED Beacon
45 Selectable Tones & 3 Stages
18 x High Powered LEDs
Eight Flash Modes

CE
UL Approved units
IP Rating: Type 4 / 4X / 3R / 13, IP66


Order code	Voltage Range	Nominal Voltage	Sounder Current	Beacon Current
DL112HDC024[X]/[Y]	12-30V dc	24 V dc	200mA	87mA
DL112HDC048[X]/[Y]	35-60V dc	48 V dc	120mA	60mA
DL112HAC115[X]/[Y]	115 ±10% V ac	115 V ac	100mA	34mA
DL112HAC230[X]/[Y]	230 ±10% V ac	230 V ac	60mA	19mA

[X] Denotes Body Colour: R = Red; G = Grey; D = Dark Grey

[Y] Denotes Lens Colour: A = Amber; B = Blue; C = Clear; M = Magenta; G = Green; R = Red; Y = Yellow

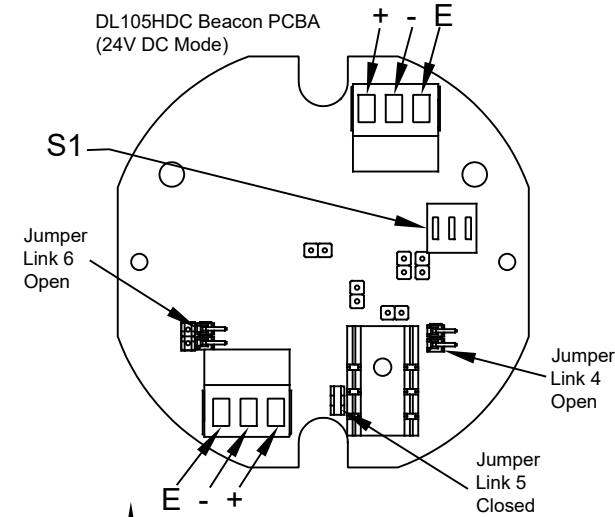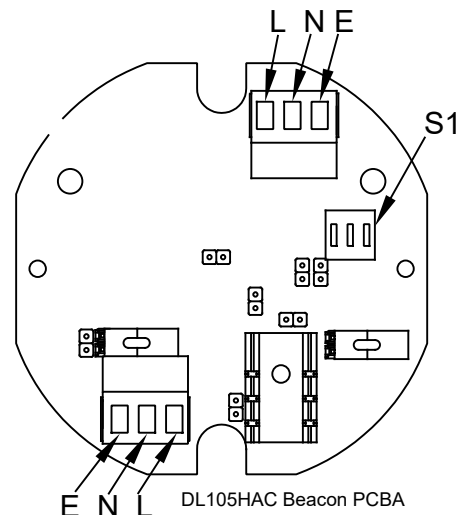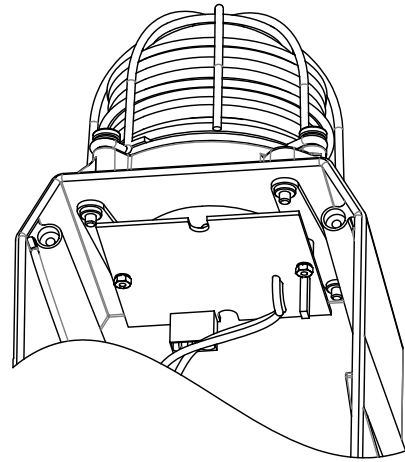

Jumper Setting	Jumper Link 4	Jumper Link 5	Jumper Link 6
24VDC Mode (Default)	Open	Closed	Open
12VDC Mode (Customer Set)	Closed	Open	Closed

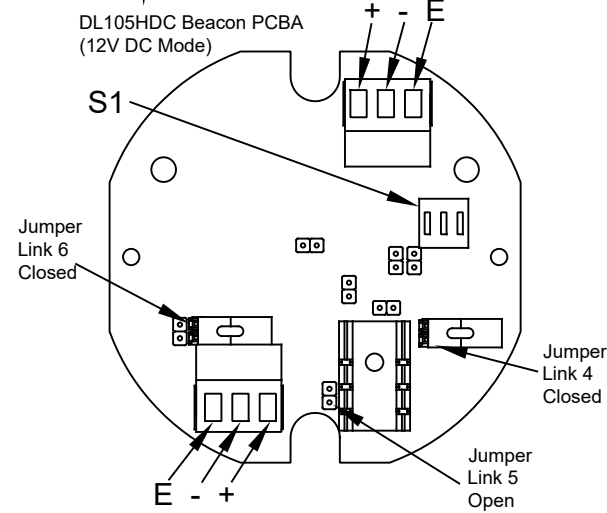

Tel : +44 (0)2 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com



B

ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.

ATTENTION: Disconnect from power source before installation or service to prevent electric shock.

No liability is accepted for any consequences of the use of this document. The technical specification of this unit is subject to change without notice due to our policy of continual product development. All dimensions/weights are approximate. This unit is sold subject to our standard conditions of sale, a copy of which is available on request.



C

DL112H


Dimensions : 268 x 130 x 125mm
1.5mm² terminals
Cable entry: 2-off M20 x 1.5mm threaded holes.
Temp: -25 °C to +55C
Unit weight: ac = 3.1Kg; dc = 2.8Kg

Table 1 - Tone Selection					
STAGE 1	FREQUENCY DESCRIPTION	Waveform	Switch	Stage 2	Stage 3
Tone 1	340 Hz Continuous	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 2	800/1000Hz @ 0.25 sec Alternating	[Waveform]	[Switch]	Tone 17	Tone 5
Tone 3	500/1200Hz @ 0.3Hz 0.5 sec Slow Whoop	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 4	800/1000Hz @ 1Hz Sw eeping	[Waveform]	[Switch]	Tone 6	Tone 5
Tone 5	2400Hz Continuous	[Waveform]	[Switch]	Tone 3	Tone 20
Tone 6	2400/2900Hz @ 7Hz Sw eeping	[Waveform]	[Switch]	Tone 7	Tone 5
Tone 7	2400/2900Hz @ 1Hz Sw eeping	[Waveform]	[Switch]	Tone 10	Tone 5
Tone 8	500/1200/500Hz @ 0.3Hz Sw eeping	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 9	1200/500Hz @ 1Hz - DIN / PFEER P.T.A.P.	[Waveform]	[Switch]	Tone 15	Tone 2
Tone 10	2400/2900Hz @ 2Hz Alternating	[Waveform]	[Switch]	Tone 7	Tone 5
Tone 11	1000Hz @ 1Hz Intermittent	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 12	800/1000Hz @ 0.875Hz Alternating	[Waveform]	[Switch]	Tone 4	Tone 5
Tone 13	2400Hz @ 1Hz Intermittent	[Waveform]	[Switch]	Tone 15	Tone 5
Tone 14	800Hz 0.25sec on, 1 sec off Intermittent	[Waveform]	[Switch]	Tone 4	Tone 5
Tone 15	800Hz Continuous	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 16	660Hz 150mS on, 150mS off Intermittent	[Waveform]	[Switch]	Tone 18	Tone 5
Tone 17	544Hz (100mS)/440Hz (400mS) - NF S 32-001	[Waveform]	[Switch]	Tone 2	Tone 27
Tone 18	660Hz 1.8sec on, 1.8sec off Intermittent	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 19	1.4KHz-1.6KHz 1s, 1.6KHz-1.4KHz 0.5s -NFC48-265	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 20	660Hz Continuous	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 21	544Hz/440Hz @ 1Hz Alternating	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 22	544Hz @ 0.875 sec. Intermittent	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 23	800Hz @ 2Hz Intermittent	[Waveform]	[Switch]	Tone 6	Tone 5
Tone 24	800/1000Hz @ 50Hz Sw eeping	[Waveform]	[Switch]	Tone 29	Tone 5
Tone 25	2400/2900Hz @ 50Hz Sw eeping	[Waveform]	[Switch]	Tone 29	Tone 5
Tone 26	Bell	[Waveform]	[Switch]	Tone 2	Tone 15
Tone 27	544Hz Continuous	[Waveform]	[Switch]	Tone 26	Tone 5
Tone 28	440Hz Continuous	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 29	800/1000Hz @ 7Hz Sw eeping	[Waveform]	[Switch]	Tone 7	Tone 5
Tone 30	300Hz Continuous	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 31	660/1200Hz @ 1Hz Sw eeping	[Waveform]	[Switch]	Tone 26	Tone 5
Tone 32	Two tone chime.	[Waveform]	[Switch]	Tone 26	Tone 15
Tone 33	745Hz @ 1Hz Intermittent	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 34	1000 & 2000Hz @ 0.5 sec Alternating - Singapore	[Waveform]	[Switch]	Tone 38	Tone 45
Tone 35	420Hz @ 0.625 sec Australian Alert	[Waveform]	[Switch]	Tone 36	Tone 5
Tone 36	500-1200Hz 3.75sec /0.25sec. Australian Evac.	[Waveform]	[Switch]	Tone 35	Tone 5
Tone 37	1000Hz Continuous - PFEER Toxic Gas	[Waveform]	[Switch]	Tone 9	Tone 45
Tone 38	2000Hz Continuous	[Waveform]	[Switch]	Tone 34	Tone 45
Tone 39	800Hz 0.25sec on, 1 sec off Intermittent	[Waveform]	[Switch]	Tone 23	Tone 17
Tone 40	544Hz (100mS)/440Hz (400mS) - NF S 32-001	[Waveform]	[Switch]	Tone 31	Tone 27
Tone 41	Motor Siren - slow rise to 1200 Hz	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 42	Motor Siren - slow rise to 800 Hz	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 43	1200 Hz Continuous	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 44	Motor Siren - slow rise to 2400 Hz	[Waveform]	[Switch]	Tone 2	Tone 5
Tone 45	1KHz 1s on, 1s off Intermittent - PFEER Gen. Alarm	[Waveform]	[Switch]	Tone 38	Tone 34

NOTE: Please check factory settings and ensure the correct alarm tone is selected for your country or application

Tone Selection / Switch Setting - Switch settings are shown in the tone selection table. Black squares are the switch levers in the ON positions

Reverse Polarity Switching - On DC versions the second stage alarm tone can be selected by reversing the polarity of the supply voltage if switch 6 is in the ON position if Link LK3 is present.

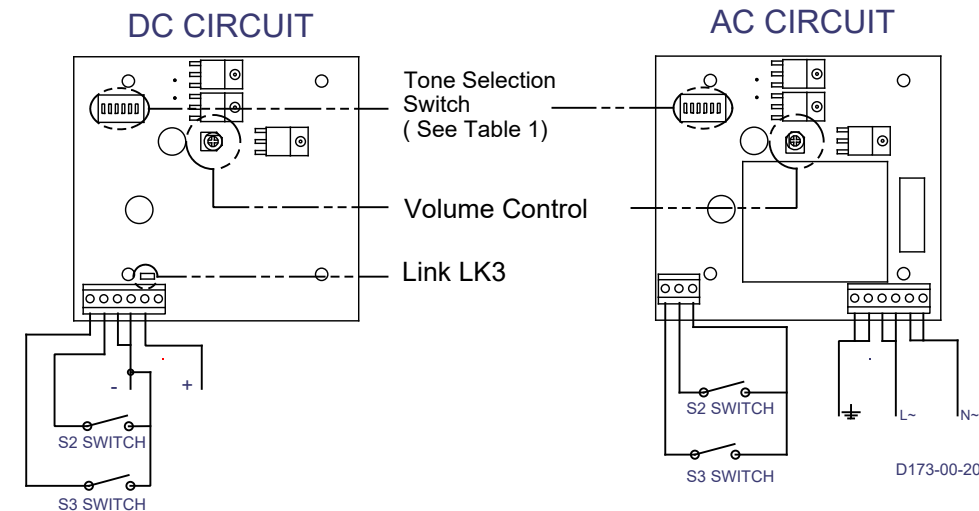

RELATED DRAWING
No modification permitted without reference to "The Authorised Person"

D173-00-201-IS_SHT1_ISSUE_3

