

INSTALLATION INFORMATION

PLEASE READ PRIOR TO INSTALLATION



LED-TLM MINI ECO Series

VISUAL SIGNALLING DEVICE



- EN Translations & Documentation, scan QR Code
- FR Traductions & Documentation, scannez le QR Code
- DE Übersetzungen & Dokumentation, QR-Code scannen
- IT Traduzioni & Documentazione, scansionare il QR code
- ES Traducciones & Documentación, escanear QR code

APPROVALS AND CONFORMITIES



General Installation Notes

- Installation must be carried out in accordance with the latest codes and regulations by a qualified electrician.
- Ensure power is disconnected prior to installation or maintenance to avoid danger of electrical shock.
- Environmental exposure conditions during installation should be dry. Moist or wet conditions should be avoided.
- The Lens of the product is Polycarbonate plastic. Do not clean with petroleum-based cleaners.
- For all installations, mount the Beacon ensuring the Lens is above the Base. Any other mounting positions will impair the IP Rating (Ingress Protection) of the Beacon.
- Avoid mounting the Beacon where it will be subjected to excessive vibration.
- This product is designed to be used at 12-24vDC and should be installed in accordance with local standards and should only be powered via a SELV/PELV Power Supply.

Installation Instructions

Secure the Tower Light Mounting Base (FT100) or Bracket (BR100) onto the required surface using the appropriate fixing holes. Once the Base/Bracket is secured, firmly twist the protective cap on the Base clockwise to release.

The customer is required to connect their +12-24vDC supply to the Red, Green or Amber lead/s and 0v to the Black lead. Figures 1 & 2 show wiring connections for all switchable colours.

Please note: Blue and White leads are not required as shown in **Wiring Diagrams 1 & 2**.


To fit the LED light modules, align the “arrow” marked on the mounting base with the “lock” symbol at the bottom of the LED light module and firmly twist anti-clockwise to secure.

The protective cap removed earlier can now be re-fitted to the light module located at the top of the stack.


Cable Connections

- Black – 0v
- Red – +12-24vDC
- Yellow – +12-24vDC
- Green – +12-24vDC
- Blue – **Not used**
- White – **Not used**

Wiring Diagram

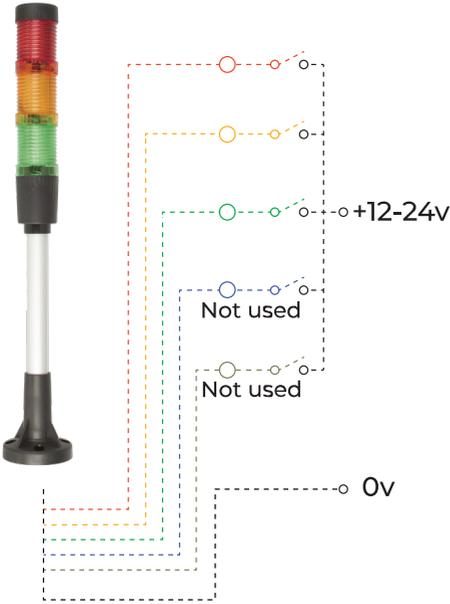

Wiring Diagram 1 (FT100)

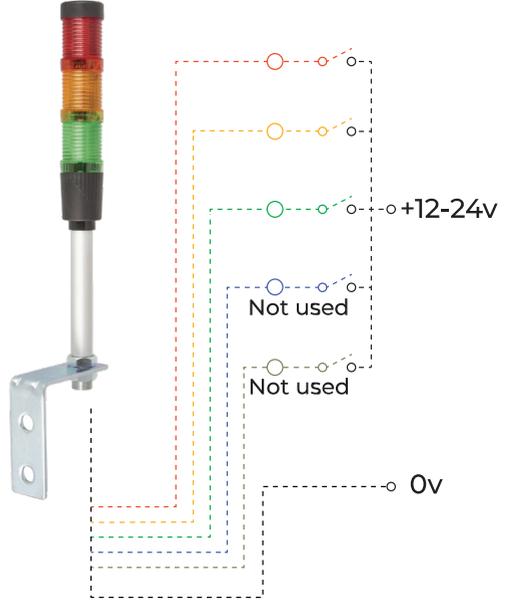

Wiring Diagram 2 (BR100)

Moflash Signalling Limited accepts no liability for any consequences following use of this document. Any technical specifications and products referred to within this document are subject to change without notice due to continual improvement and product development policies. All dB(A) figures are subject to environmental conditions. The units are sold under Moflash standard conditions of sale, available on request. Additional resources, including installation sheet translations, certificates and DoCs are available from the www.moflash.co.uk website.