MOREK
Creating a better future for You

INSTALLATION GUIDE


www.morek.eu

Product information


Product code	Product name	$I_{n\,Al}$	$I_{n\,Cu}$	U_n	USA specific		
					$I_{max\,Al}$	$I_{max\,Cu}$	U_{max}
MAA1016A10	OTL-connector 1xAl/Cu 1,5-16mm² (Grey)	75 A	82 A	1000 V AC / 1500 V DC	65 A	85 A	1000 V
MAA1016B10	OTL-connector 1xAl/Cu 1,5-16mm² (Blue)	75 A	82 A	1000 V AC / 1500 V DC	65 A	85 A	1000 V
MAA1016Y10	OTL-connector 1xAl/Cu 1,5-16mm² (Yellow/Green)	75 A	82 A	1000 V AC / 1500 V DC	65 A	85 A	1000 V
MAA1016R10	OTL-connector 1xAl/Cu 1,5-16mm² (Red)	75 A	82 A	1000 V AC / 1500 V DC	65 A	85 A	1000 V
MAA1016S10	OTL-connector 1xAl/Cu 1,5-16mm² (Black)	75 A	82 A	1000 V AC / 1500 V DC	65 A	85 A	1000 V

Mounting


Certification and approval

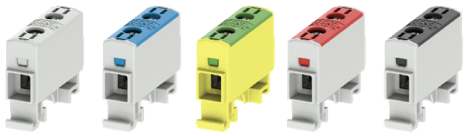

DIN-rail mounting



DIN rail mounting
Set connector on DIN rail. Push until connector locks down.

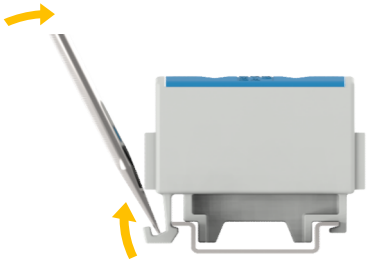

Removal
Release the slider and lift connector

Connection

Screw size




Screw	M8
SW	4

Tightening torque M

1,5 mm² (16 AWG)	1,5 Nm
2,5-6 mm² (10-14 AWG)	3,5 Nm
10-16 mm² (4-8 AWG)	7 Nm

Conductor range	1xAl/Cu 1,5-16 mm²
Max. wire cross section	16 mm²

Stripping length L 13 mm



Copper conductors

Max. 3 X CU / Conductor contact space



≤ 16 mm² total

Aluminium conductors

1 X AL / Conductor contact space



Anti-corrosion paste: e.g. Penetrox

Supported IEC 60228 -conductors



Class 5 & 6 (fine stranded) Using ferrule is recommended

Class 1 & 2 (solid and stranded)

Sector shaped cable



Pre-round the cable


Conductor installation

Support connector during tightening the screws. Connector must be installed so that conductors are relieved from strain.

1-pole connector

Remove any oxide layer by brushing with a brass or a steel brush.

Use protective grease (e.g. Penetrox) and brush grease on the contact surfaces

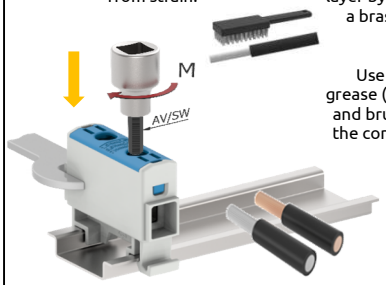

Marking



5 mm width
(Eq. Partex TX)

Attention!

The installation must always be done in accordance with the international standard in compliance with national legislation.



Each protective or neutral conductor must have their own conductor space.
SFS 6000-7-729.

Cross section and max. number of Cu- conductors / contact space (Al- conductors in parenthesis)

1,5 mm²	2,5 mm²	6 mm²	10 mm²	16 mm²	25 mm²	35 mm²	50 mm²
3 (1)	**3 (1)**	**2 (1)**	**1 (1)**	**1 (1)**	**-**	**-**	**-**

The specified max. amount of conductors refers only to industrially installed terminals.

70 mm²	95 mm²	120 mm²	150 mm²	185 mm²	240 mm²	300 mm²	400 mm²
-	-	-	-	-	-	-	-