

Parallel Connected Capacitors with Break-action Mechanism

Capacitors type B

Casing: aluminium

Filling material: based on vegetable oil

Fastening: male nipple with nut and washer included

Discharge resistance



Overpressure protection

On request further capacities or connectors



A Push-in twin terminals 0.5–1 mm²

B Double spade connector 6.3x0.8 acc. to IEC 61210

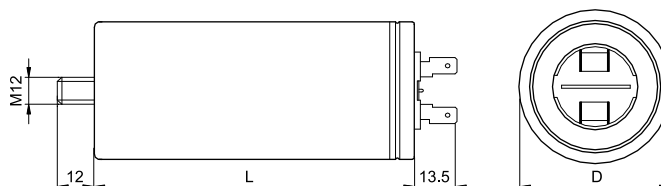

Ref. No.	Capacity μF (±10%)	Temperature range °C	Drawing	∅ (D) mm	Length (L) mm	Male nipple/ length (mm)	Weight g	Packaging unit pcs.
250 V, 50/60 Hz								
536379	4.0	-40 to 100	A	30	60	M8x10	35	144
536380	6.0	-40 to 100	A	30	60	M8x10	40	144
536381	8.0	-40 to 100	A	35	72	M8x10	42	144
536382	10.0	-40 to 100	A	35	72	M8x10	46	144
536383	12.0	-40 to 100	A	35	72	M8x10	49	144
536386	18.0	-40 to 100	A	40	72	M8x10	76	105
536387	20.0	-40 to 100	A	40	72	M8x10	80	105
536388	25.0	-40 to 100	A	40	72	M8x10	82	105
536389	30.0	-40 to 100	A	40	97	M8x10	101	96
536390	32.0	-40 to 100	A	40	97	M8x10	105	96
536392	40.0	-40 to 100	A	45	97	M8x10	132	70
536393	45.0	-40 to 100	A	45	97	M8x10	142	70
536394	50.0	-40 to 100	A	45	97	M8x10	150	70
536396	60.0	-40 to 100	A	45	121	M8x10	175	35
537058	65.0	-40 to 100	B	60	105	M12x12	201	36
506360	85.0	-40 to 100	B	60	130	M12x12	248	36
506363	100.0	-40 to 100	B	60	130	M12x12	286	36

Ref. No.	Capacity μF (±10%)	Temperature range °C	Drawing	∅ (D) mm	Length (L) mm	Male nipple/ length (mm)	Weight g	Packaging unit pcs.
450 V, 50/60 Hz								
536400	32.0	-40 to 100	A	45	97	M8x10	179	70
536401	37.0	-40 to 100	A	45	97	M8x10	200	70
536402	50.0	-40 to 100	B	45	121	M8x10	360	35
536404	60.0	-40 to 100	B	60	130	M12x12	270	36
536405	85.0	-40 to 100	B	60	130	M12x12	420	36