

CV 24 V



EASYLINE 24 V I IP

186633, 186432

Typical Applications

Built-in in luminaires for 24 V systems

- Industrial lighting
- Street lighting
- Outdoor lighting

EasyLine 24 V I IP

- **DEGREE OF PROTECTION: IP67**
- **VERY LOW RIPPLE CURRENT: < 3%**
- **PREASSEMBLED CONNECTION LEADS**
- **SELV**
- **SUITABLE FOR BUILT-IN INTO FURNITURE**
- **LONG SERVICE LIFE:
UP TO 50,000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



EasyLine 24 V I IP

Product features

- Compact casing shape IP67
- For use in applications with low capacity range of up to 30 W

Electrical features

- Mains voltage: 220–240 V $\pm 10\%$
- Mains frequency: 50–60 Hz
- Pre-assembled connection leads

K52.1: H05RN-F
primary: 2x1 mm²,
secondary: AWG18,
length: 335 mm

K30.2: H05RN-F
primary: 2x0.75 mm²,
secondary: 2x1 mm²,
length: 335 mm



- Power factor at full load: > 0.95 C

Safety features

- Protection against transient main peaks
- Electronic short-circuit protection
- Overload protection: reversible
- Protection against "no load" operation
- Degree of protection: IP67
- Protection class II
- SELV



Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
186633	20	48	340
186432	20	48	440

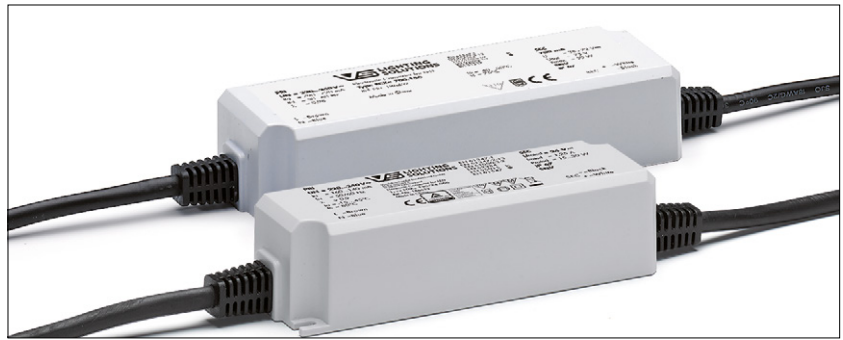

Dimensions independent drivers

- Casing: K52.1
- Ref. No.: 186633
- Length: 131 mm
- Width: 42 mm
- Height: 34 mm

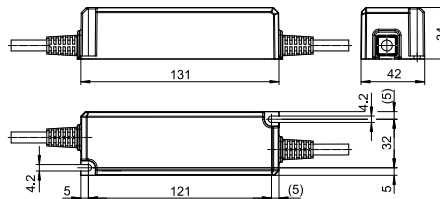

Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 55015



186633





186633



Dimensions built-in drivers

- Casing: K30.2
- Ref. No.: 186432
- Length: 155 mm
- Width: 49 mm
- Height: 32 mm

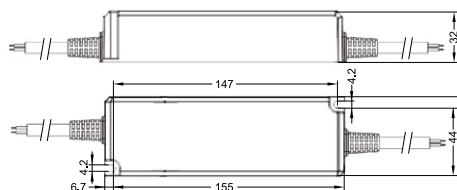

Product guarantee

- 5 years for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA (\pm 5%)	Voltage output DC [V]	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
30	EDXe 130/24.066	186633	220–240	155–145	19.8 / 203	0–1250	24	< 10	> 88	\leq 3
75	EDXe 175/24.040	186432	220–240	400–360	29 / 220	0–3125	24	< 10	> 88	\leq 3

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
186633	-15	+45	5	60	-40	+85	5	95	+80	IP67
186432			20	60						

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.	
	186633, 186432	
All	70 °C*	80 °C
hrs.	50,000	30,000

* recommended operation temperature

Product labels


PR1 UN = 220...240V- In = 155...145 mA fn = 50/60 Hz λ = 0,95 ta = -15...45°C tc = 80°C L = Brown N = Blue	VSS LIGHTING SOLUTIONS Vossloh-Schwabe Deutschland GmbH Hohe Steinert 8 D-58509 Lüdenscheid Electronic Converter for LED Type EDXe 130/24.066 Ref-No. 186633 Made in PRC	SEC C4614 Urated = 24 V~ Irated = 1,25 A Prated = 30 W IP 67 SELV
---	---	---

PR1 UN = 220...240V- In = 400...360 mA fn = 50/60 Hz λ = 0,95 L = Brown N = Blue	VSS LIGHTING SOLUTIONS Vossloh-Schwabe Deutschland GmbH Hohe Steinert 8 D-58509 Lüdenscheid Electronic Converter for LED Type EDXe 175/24.040 Ref-No. 186432 Made in PRC	EN 61347-1 EN 61347-2-13 EN 62384 EN 55015 EN 61547 ta = -15...45°C tc = 80°C	SEC CK530 Urated = 24 V~ Irated = 3,125 A Prated = 75 W IP 67 SELV
---	---	---	--


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 186633 / Type EDXe 130/24.066


Working area

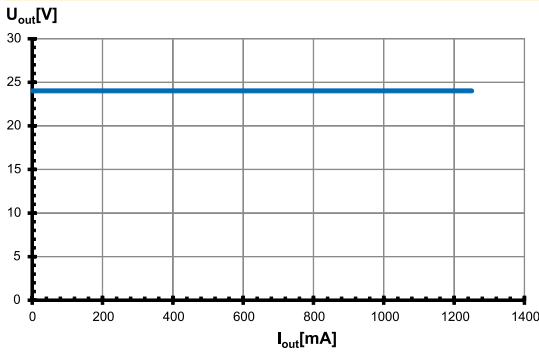


Efficiency

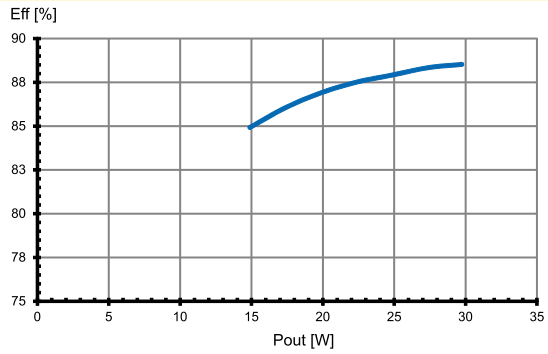

Power factor

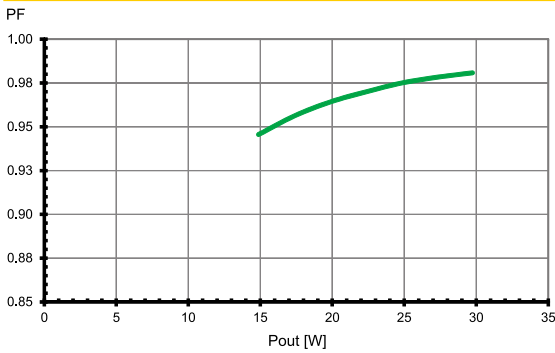


Total harmonic factor (THD)

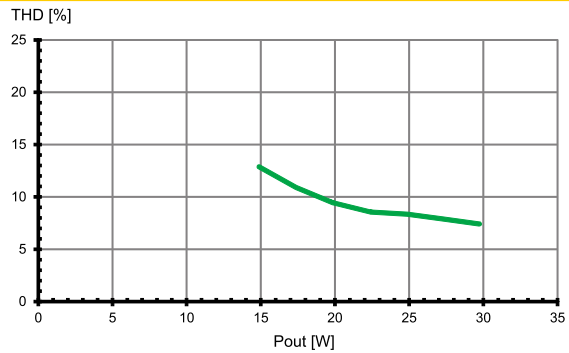


Typ. performance graphs for 186432 / Type EDXe 175/24.040


Working area

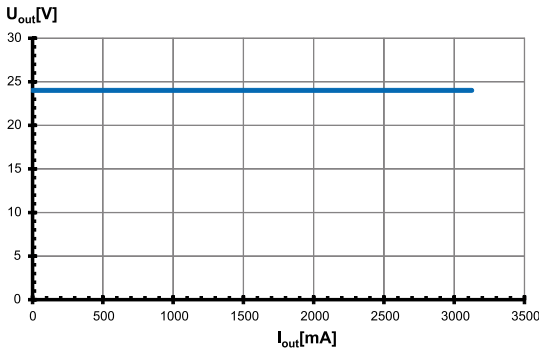


Efficiency

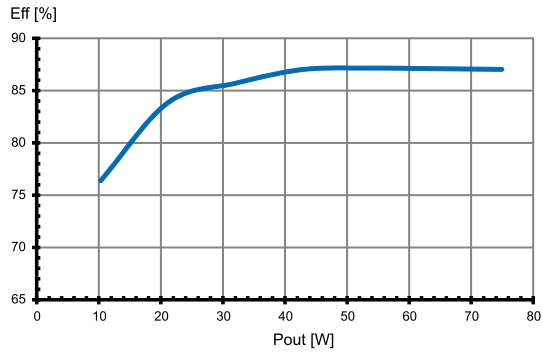

Power factor

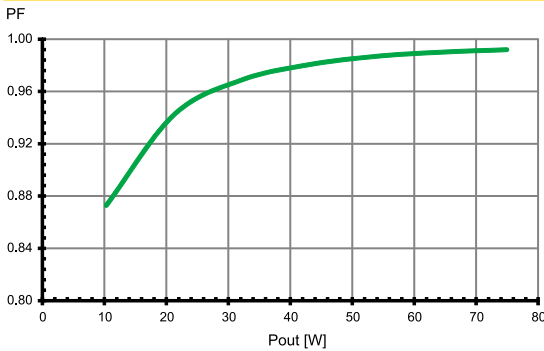

Total harmonic factor (THD)

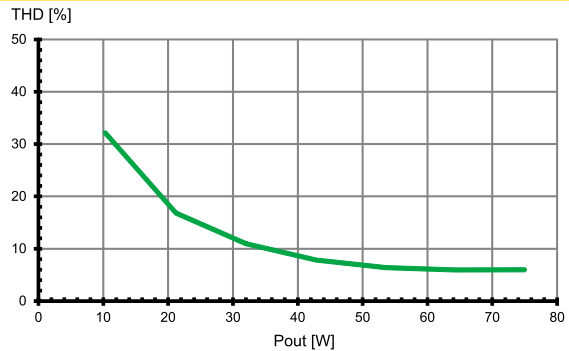

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Safety features

- Transient mains peaks protection:
Values are in compliance with EN 61547
(interference immunity).
Surges between L-N: up to 1 kV
Surges between L/N-PE: up to 2 kV
- Short-circuit protection:
The control gear is protected against
permanent short-circuit with automatic restart
function.
- Overload protection: The control gear only works in range of rated
output power and voltage problemfree.
Please check that the selected LED load is
suitable (see Electrical Characteristics on
this data sheet).
- No load operation: The control gear is protected against no load
operation (open load).
- If any of the above mentioned safety functions will be triggered,
disconnect the control gear from the power supply then find and
eliminate the cause of the problem.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1


Mechanical mounting

- Mounting position: Driver 186633 is suitable for independent operation. Driver 186432 is not suitable for independent operation.
- Mounting location: LED driver 186432 is designed for integration into luminaires or comparable devices. Independent LED drivers do not need to be integrated into a casing. Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP67
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing. LED drivers should be mounted with the greatest possible clearance to heat sources. During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm
-

Electrical installation

- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference). Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another. Max. secondary side lead length: 0.8 m
- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed
- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.

- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
Automatic cut-out type		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
EDXe 130/24.066	186633	20	26	32	33	43	53
EDXe 175/24.040	186432	12	16	20	21	27	34

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.