

E2EF



Metal Head for long-distance Detection that Withstands Harsh Environments Where the Workpiece Can Rub against the Sensor

- Completely stainless-steel housing
- Long-distance detection equivalent to or greater than Proximity Sensors with Resin Heads *1
- More than 20 times *2 the durability of Proximity Sensors with Resin Heads
- Spatter-resistant Models with fluororesin coating are available.
- Aluminum chip immunity
- Pre-wired Smartclick Connector Models are also available.

*1. The actual sensing distance will vary with the size or material of the object. For details, refer to Engineering Data.

*2. Test results for stainless-steel brush rotating at 130 rpm.



Be sure to read *Safety Precautions* on page 4.

Note: Models with a fluororesin coating also use vinyl chloride for the cable material and require separate protection.

Ordering Information

Sensors [Refer to Dimensions on page 5.]

Standard Models (Completely stainless-steel housing)

Connection method	Appearance		Sensing distance	Output	Operation mode	Model
Pre-wired Models (2m)		M8	2mm	DC 2-Wire (polarity)	NO	E2EF-X2D1 2M *2
		M12	3mm			E2EF-X3D1 2M *1
		M18	7mm			E2EF-X7D1 2M *1
		M30	12mm			E2EF-X12D1 2M *1
Pre-wired Smartclick Connector Models (M12)		M8	2mm			E2EF-X2D1-M1TGJ 0.3M *2
		M12	3mm			E2EF-X3D1-M1TGJ 0.3M *1
		M18	7mm			E2EF-X7D1-M1TGJ 0.3M *1
		M30	12mm			E2EF-X12D1-M1TGJ 0.3M *1

*1. Have been discontinued at the end of March 2025.

*2. Orders will be accepted until the end of March 2026.

Spatter-resistant Models (Completely stainless-steel housing with fluororesin coating)

Connection method	Appearance		Sensing distance	Output	Operation mode	Model
Pre-wired Models (2m)		M8	2mm	DC 2-Wire (polarity)	NO	E2EF-QX2D1 2M *2
		M12	3mm			E2EF-QX3D1 2M *1
		M18	7mm			E2EF-QX7D1 2M *1
		M30	12mm			E2EF-QX12D1 2M *1
Pre-wired Smartclick Connector Models (M12)		M8	2mm			E2EF-QX2D1-M1TGJ 0.3M *2
		M12	3mm			E2EF-QX3D1-M1TGJ 0.3M *1
		M18	7mm			E2EF-QX7D1-M1TGJ 0.3M *1
		M30	12mm			E2EF-QX12D1-M1TGJ 0.3M *1

*1. Have been discontinued at the end of March 2025.

*2. Orders will be accepted until the end of March 2026.

Note: Vinyl chloride is used for the cable material, and separate protection is required.

Accessories (Order Separately)

Sensor I/O Connectors

Smart Click Connectors

Cable connection direction	Cable specifications	Cable length	No. of cable conductors	Model	Applicable Proximity Sensor model number
	Flame-retardant, flexible cable	2m	4	XS5F-D421-D80-F	E2EF-X□D1-M1TGJ
		5m	4	XS5F-D421-G80-F	E2EF-QX□D1-M1TGJ

Note: Refer to *Sensor I/O Connector/Sensor Controller* on your OMRON website for details.

Ratings and Specifications

Item	Size Shielded	M8		M12		M18		M30	
		Shielded							
		Completely stainless-steel housing	Fluororesin coating	Completely stainless-steel housing	Fluororesin coating	Completely stainless-steel housing	Fluororesin coating	Completely stainless-steel housing	Fluororesin coating
Model		E2EF-X2D1 (-M1TGJ)	E2EF-QX2D1 (-M1TGJ)	E2EF-X3D1 (-M1TGJ)	E2EF-QX3D1 (-M1TGJ)	E2EF-X7D1 (-M1TGJ)	E2EF-QX7D1 (-M1TGJ)	E2EF-X12D1 (-M1TGJ)	E2EF-QX12D1 (-M1TGJ)
Sensing distance		2mm±10%		3mm±10%		7mm±10%		12mm±10%	
Set distance		0 to 1.4 mm		0 to 2.1mm		0 to 4.9mm		0 to 8.4mm	
Differential travel		15% max. of sensing distance							
Sensing object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to Engineering Data on page 6.)							
Standard sensing object		Iron, 12 × 12 × 1 mm		Iron, 12 × 12 × 1 mm		Iron, 30 × 30 × 1 mm		Iron, 54 × 54 × 1 mm	
Response frequency *		200Hz		80Hz		100Hz		50Hz	
Power supply voltage		10 to 30 VDC, ripple (p-p) : 10% max.							
Leakage current		0.8 mA max.							
Output configuration		With polarity							
Control output	Switching capacity	3 to 100 mA							
	Residual voltage	3 V max.(Load current : 100 mA max., Cable length : 2 m)							
Indicators		Operation indicator (red LED), Setting indicator (green LED)							
Operation mode (with sensing object approaching)		NO(normally open)							
Protection circuits		Surge suppressor, Load short-circuit protection							
Ambient temperature range		Operating : -10 to 70°C, Storage : -25 to 70°C (with no icing or condensation)							
Ambient humidity range		Operating/Storage : 35% to 95% (with no condensation)							
Temperature influence		±20% max. of sensing distance at 23°C in the temperature range of -10 to 70°C.							
Voltage influence		±1% max. of sensing distance at rated voltage in the rated voltage ±15% range							
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case							
Dielectric strength		1,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case							
Vibration resistance		Destruction : 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions							
Shock resistance		Destruction : 500 m/s ² 10 times each in X, Y, and Z directions		Destruction : 1,000 m/s ² 10 times each in X, Y, and Z directions					
Degree of protection		IEC 60529 IP67							
Connection method		Unmarked : Pre-wired Models (Standard cable length : 2 m) Models ending with -M1TGJ : Pre-wired Connector Models (Standard cable length : 300 mm)							
Weight (packed state)	Pre-wired Models (2 m)	Approx. 105 g		Approx. 190 g		Approx. 215 g		Approx. 295 g	
	Pre-wired Connector Models	Approx. 65 g		Approx. 85 g		Approx. 110 g		Approx. 190 g	
Materials	Case	Stainless steel (SUS303) (E2EF-QX□□ : SUS303, with fluororesin coating)							
	Sensing surface (thickness)	0.2mm		0.4mm		0.4mm		0.5mm	
	Clamping nuts	Stainless steel (SUS303) (E2EF-QX□□ : SUS303, with fluororesin coating)							
	Toothed washer	Zinc-plated iron							
	Cable	PVC (flame retardant)							
Accessories		Instruction manual							

* The response frequency of the DC switching section is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

I/O Circuit Diagrams


Operation mode	Model	Timing chart	Output circuit
NO	E2EF-(Q)X□□D1 (-M1TGJ)	<p>The timing chart shows a sensing object moving through three areas: Non-sensing area, Unstable sensing area, and Stable sensing area. The 'Set position' is marked at the start of the stable area. The x-axis represents distance in % (0 to 100). The y-axis shows the state of three outputs: Setting indicator (green), Operation indicator (red), and Control output. The Setting indicator turns ON at the start of the stable area and OFF when the object leaves. The Operation indicator turns ON at the start of the stable area and OFF when the object leaves. The Control output turns ON at the start of the stable area and OFF when the object leaves. The rated sensing distance is indicated as 70(TYP) %.</p>	<p>The output circuit diagram shows a transistor circuit. The Brown pin (1) is connected to the Load. The Blue pin (4) is connected to 0V. The circuit includes a proximity sensor main circuit, a transistor, and a diode. Note: The load can be connected to either the +V or 0 V side. Note: Pins 2 and 3 are not used.</p>

E2EF

Engineering Data (Reference Value)


Sensing Area

E2EF-X□
-QX□

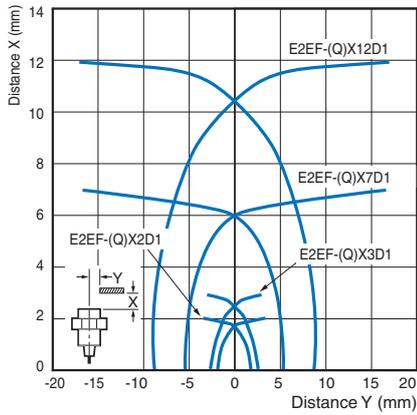


Influence of Sensing Object Size and Material


E2EF-X2D1
-QX2D1

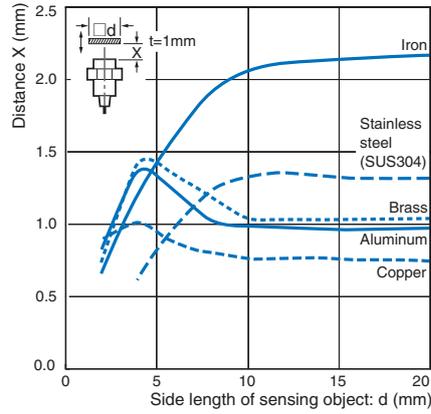


E2EF-X3D1
-QX3D1

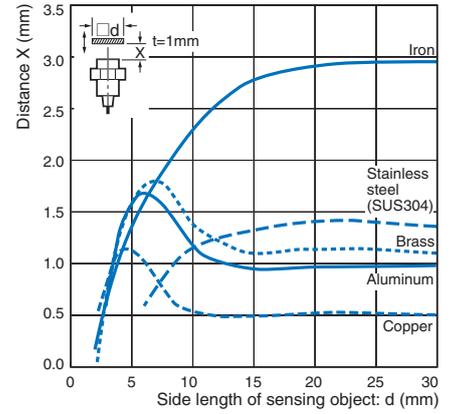

E2EF-X7D1
-QX7D1

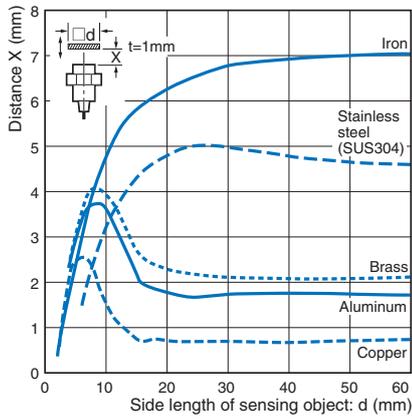


E2EF-X12D1
-QX12D1

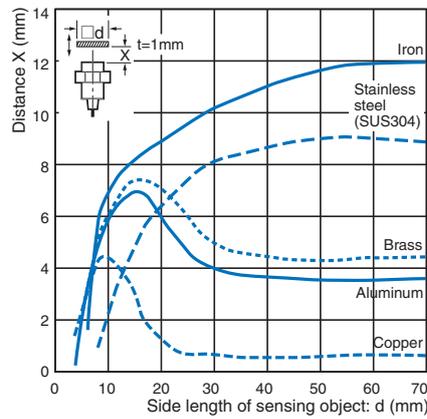


Leakage Current

E2EF-X□D1

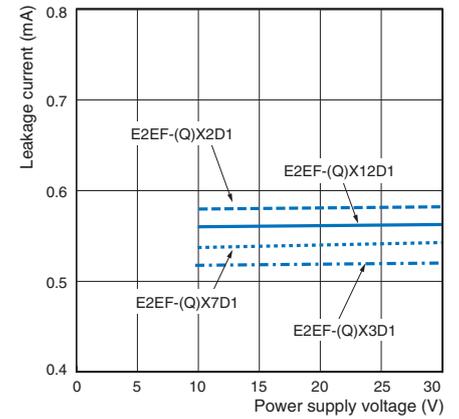

Residual Output Voltage

E2EF-X□D1
-QX□D1

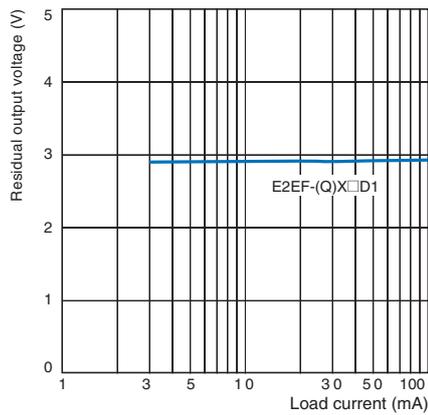

Safety Precautions

Be sure to read the precautions for all models in the website at: <http://www.ia.omron.com/>.

WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Never use this product with an AC power supply. Otherwise, explosion may result.



Precautions for Safe Use

The following precautions must be observed to ensure safe operation.

- Do not use the Sensor in an environment where inflammable or explosive gas is present.
- Do not attempt to disassemble, repair, or modify any Sensors.
- Power Supply Voltage
Do not use a voltage that exceeds the rated operating voltage range. Applying a voltage that is higher than the operating voltage range may result in explosion or fire.
- Incorrect Wiring
Be sure that the power supply polarity and other wiring is correct. Incorrect wiring may cause explosion or fire.
- Connection without a Load
If the power supply is connected directly without a load, the internal elements may explode or burn. Be sure to insert a load when connecting the power supply.


Precautions for Correct Use

Do not use the Sensor under ambient conditions that exceed the ratings.

- Do not use the Sensor in the following locations.
 - Outdoor locations directly subject to sunlight, rain, snow, or water droplets
 - Locations subject to atmospheres with chemical vapors, in particular solvents and acids
 - Locations subject to corrosive gas
- The Sensor may malfunction if used near ultrasonic cleaning equipment, high-frequency equipment, transceivers, cellular phones, inverters, or other devices that generate a high-frequency electric field. Refer to the OMRON website (www.ia.omron.com/) for typical measures.
- Laying the Sensor wiring in the same conduit or duct as high-voltage wires or power lines may result in incorrect operation and damage due to induction. Wire the Sensor using a separate conduit or independent conduit.
- Cleaning
Never use thinner or other solvents. Otherwise, the Sensor surface may be dissolved.


AND Connection of Proximity Sensors (DC 2-wire)

Two or more sensors cannot be connected in series on the AND circuit. Use them via a relay as shown on the figure.

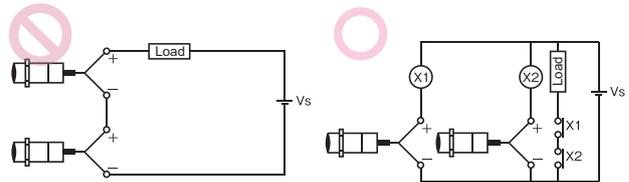

OR Wiring of Proximity Sensors (DC 2-wire)


As a general principle, two or more sensors cannot be used in parallel on the OR circuit. It is possible only when sensors do not operate simultaneously and loads do not need to be maintained. When loads need to be maintained, use the sensors via a relay as shown on the figure.

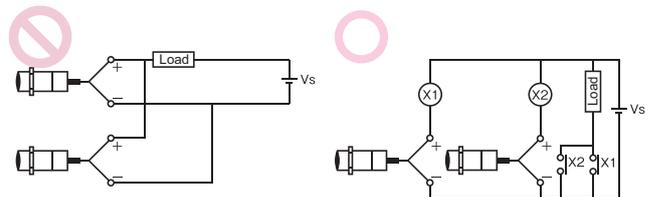

Design

Influence of Surrounding Metal

When the Proximity Sensor is embedded in metal, make sure that the clearances given in the following table are maintained. The values depend on the type of nuts used for mounting. Be sure to use the supplied nuts (SUS303).

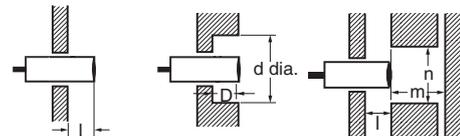

(Unit: mm)

Model	Item		l	d	D	m	n
	Embedding material						
E2EF-(Q)X2D1	Iron		0	8	0	8	30
	Aluminum		10	50	10	8	50
E2EF-(Q)X3D1	Iron		0	12	0	12	40
	Aluminum		16	70	16	12	70
E2EF-(Q)X7D1	Iron		0	18	0	28	60
	Aluminum		16	80	16	28	80
E2EF-(Q)X12D1	Iron		0	30	0	48	100
	Aluminum		24	120	24	48	120


Note: The influence from other non-magnetic surrounding metals is nearly the same as that from aluminum.

Mutual Interference

When installing two or more Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.

(Unit: mm)

Model	Item	A	B
E2EF-(Q)X2D1		35	35
E2EF-(Q)X3D1		40	35
E2EF-(Q)X7D1		65	60
E2EF-(Q)X12D1		110	100




Chips from Cutting Aluminum

Normally, chips from cutting aluminum will not cause a detection signal to be output even if it adheres to or accumulates on the detection surface. In the following cases, however, a detection signal may be output. Remove the cutting chips in these cases.

1. If $d \geq \frac{2}{3} D$ at the center of the detection surface where d is the cutting chip size and D is the detection surface size

(Unit: mm)

Model	Dimension	D
E2EF-(Q)X2D1		6
E2EF-(Q)X3D1		10
E2EF-(Q)X7D1		16
E2EF-(Q)X12D1		28

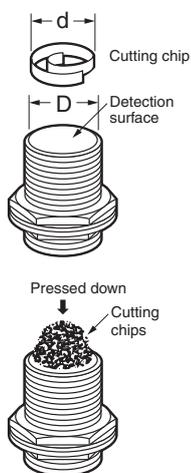

- 2.If the cutting chips are pressed down

Mounting

Do not tighten the nut with excessive force. A washer must be used with the nut. Do not use tightening force that exceeds the values in the following table.

Model	Torque
E2EF-(Q)X2D1	9 N·m
E2EF-(Q)X3D1	30 N·m
E2EF-(Q)X7D1	70 N·m
E2EF-(Q)X12D1	180 N·m




Dimensions

Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.


Sensors

Pre-wired Models


E2EF-X2D1 -QX2D1

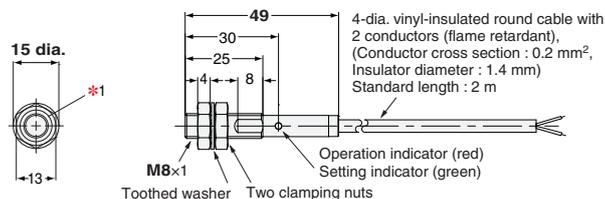


E2EF-X3D1 -QX3D1

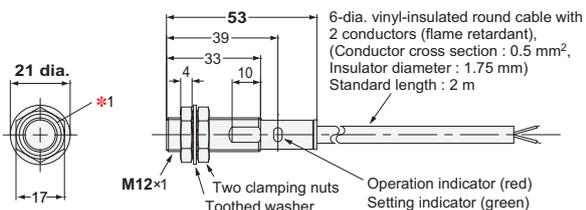

E2EF-X7D1 -QX7D1

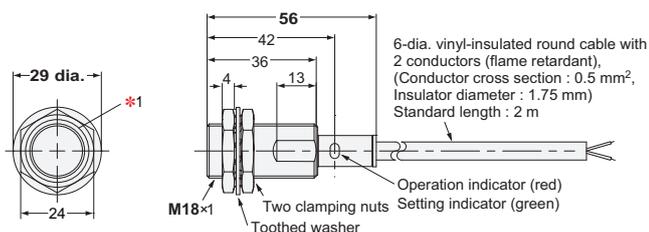


E2EF-X12D1 -QX12D1

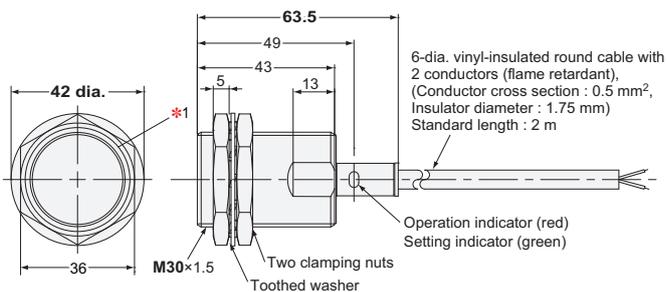


Smartclick Connector Models


E2EF-X2D1-M1TGJ -QX2D1-M1TGJ

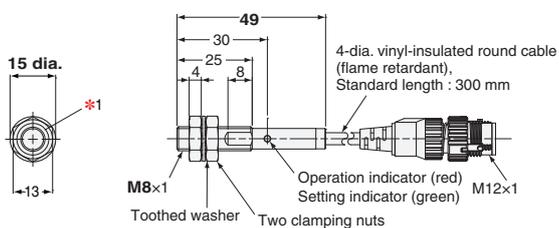


E2EF-X3D1-M1TGJ -QX3D1-M1TGJ

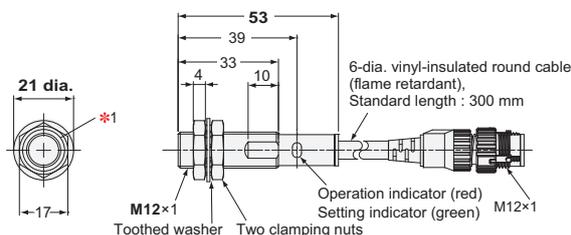

E2EF-X7D1-M1TGJ -QX7D1-M1TGJ

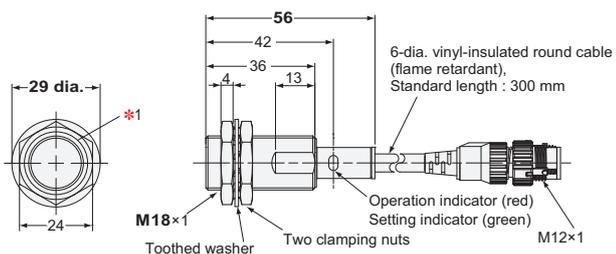

E2EF-X12D1-M1TGJ -QX12D1-M1TGJ

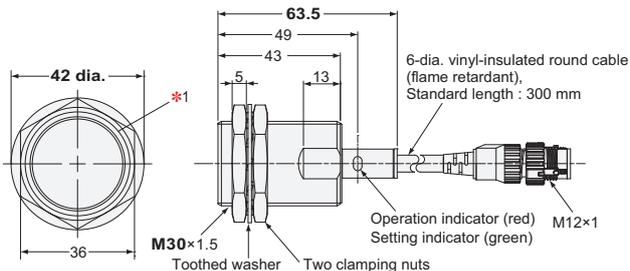

*1. The E2EF-QX□D type Clamping nut (optional accessory) is grooved to identify the material (SUS303, with fluororesin coating).

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN

Contact : www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.

438B Alexandra Road, #08-01/02 Alexandra
Technopark, Singapore 119968
Tel: (65) 6835-3011 Fax: (65) 6835-3011

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

Authorized Distributor:

©OMRON Corporation 2012-2025 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_4_6

Cat. No. D114-E1-04 0425 (0912)