

Blu2Light

DALI POWER SUPPLY-IND



DALI POWER SUPPLY-IND

For in-luminaire installation

The DALI Power Supply-IND unit was designed to enable space-saving installation and lets you determine DALI devices. The unit is particularly ideal for smart lighting concepts for office or industrial luminaires. And the DALI Power Supply-IND unit can be used to implement island solutions with a maximum of flexibility.

new >>

The DALI Power Supply also serves as a power supply for existing DALI applications in order to make them Blu2Light-capable.

DALI Power Supply-IND Functions

- 30 mA DALI BUS POWER SUPPLY UNIT
- CASING WITH CORD GRIP FOR INDEPENDENT OPERATION
- SLIM-LINE CASING FOR LINEAR LUMINAIRE CONCEPTS
- OPERATING LIFETIME: 50,000 HRS.
- PRODUCT GUARANTEE: 5 YEARS



DALI Power Supply-IND

For in-luminaire installation

These light control devices are designed for independent operation.

Technical Specifications

Ambient temperature t_a : 5 to 50 °C

Service life: 50,000 h

Push-in terminals with a lever opening: 0.5–1.5 mm²

Degree of protection: IP20

Radio interference suppression

For luminaires of protection class I and II

For independent operation

DALI devices are connected directly to the DALI bus.

The number of control gear units (DALI devices) depends on the power consumption of the connected devices.

Connections

Mains connection:

220–240 V AC/DC, 0/50–60 Hz,

max. power consumption 2 W

1 DALI bus on 2 pairs of terminals

current on the DALI bus

$I_{\text{POWER SUPPLY GUARANTEED}} = 30 \text{ mA}$

$I_{\text{POWER SUPPLY MAXIMUM}} = 70 \text{ mA}$

(for the current consumption of individual components, please see the respective datasheet)

The standard version of the DALI bus is not SELV-compliant. As a result, the DALI cable must be mains-voltage-proof.

The DALI bus is fitted with electronic reversible overload and short-circuit protection.

Functions

Supply unit (30 mA) for DALI bus systems.

Switching the outputs of several DALI Power Supply-IND

(30 mA) units in parallel is permissible (max. 5 x 30 mA).


Connection of up to 7 DALI ballasts in combination

with a VS Blu2Light MultiSensor or Connect ME

to a DALI Power Supply-IND.

Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.


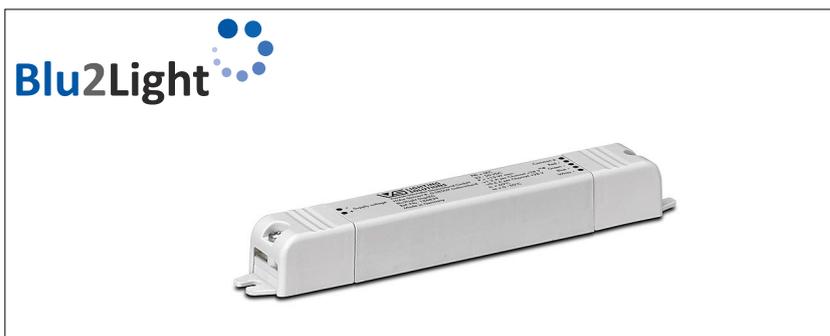


DALI Power Supply-IND

Dimensions: (LxWxH): 150x22x19 mm

Weight: 52 g

Ref. No.: 187357



The values specified in this datasheet can change due to technical innovations; any such changes will be made without separate notification.

General Safety Instructions

- Blu2Light products may be installed and commissioned only by authorised and suitably trained staff.
- Prior to installation and commissioning, please read these instructions with care to ensure safe and correct handling.
- Only ever conduct any work on the devices in a voltage-free state.
- All valid safety and accident prevention directives must be observed.
- Unauthorised opening of the products is not permitted since this poses a danger to life through electrical shock. Repairs may be carried out only by the manufacturer.
- Never apply mains voltage or any other external voltage to the DALI control line as this can destroy individual components.

DALI Power Supply-IND

Installation


- Install any way up.
- Only install in dry rooms or luminaires, boxes, casings or similar.
If the DALI Power Supply unit is destined for use in outdoor applications or high humidity rooms, casings with a corresponding degree of protection must be used.
- Attach with the help of 3 mm or 4 mm screws.
- Ensure a flat, solid surface for installation.

Application/Function

- Suitable for luminaire installation, as well as for independent installation, e.g. in a false ceiling..
- Power supply unit (30 mA) for DALI bus systems.

Installation Instructions

- Conductor cross-section for all terminals: 0.5–1.5 mm²
- Cable preparation (see right)
- The standard version of the DALI bus features only basic insulation.
All DALI cables must therefore be mains-voltage-proof.
- The maximum permissible length of the DALI bus must not be exceeded during installation: the maximum length of the DALI bus totals 300 m, with a conductor cross-section of 1.5 mm².
- Depending on the number of connected DALI devices, the maximum permissible length of 300 m can be substantially reduced.
See datasheet for DALI devices.
- Laying the DALI bus line alongside the power supply line in a single cable is permissible – up to a maximum of 100 m, with NYM 5 x 1.5 mm².

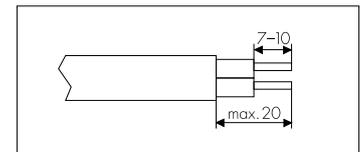


Important Notes

- Polarity must be observed.
- Please refer to the installation instructions included with the product and the applicable Blu2Light system data sheet "How to Blu2Light" before installation.
- All Blu2Light devices that are supplied via DALI may only be connected to one DALI power supply!
Therefore, it is not permissible to connect several Blu2Light devices to one power supply. In this case, malfunctions will occur.

The values specified in this datasheet can change due to technical innovations; any such changes will be made without separate notification.

Circuit Diagram of the DALI Power Supply Unit

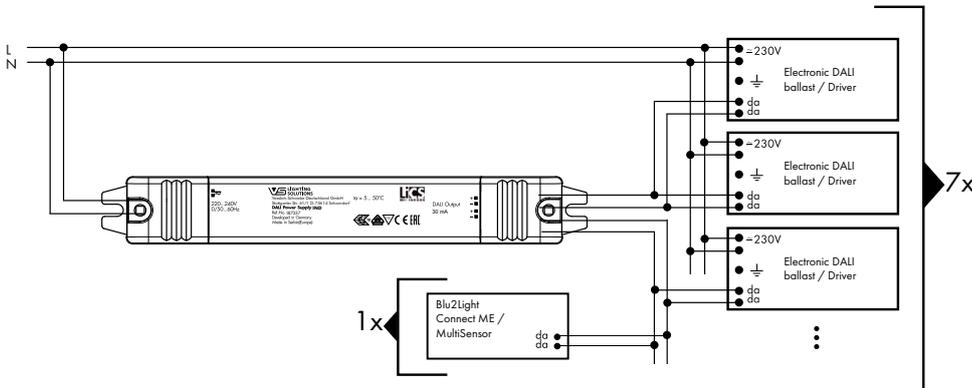

Technical Specifications DALI Power Supply-IND

DALI Power Supply-IND	
Ref. No.:	187357
Supply voltage	220-240 V AC/DC, 0/50-60 Hz
Power consumption	2 W
Ambient temperature t_a	5 to 50 °C
DALI Output (da+-)	max. 30 mA consumption
Degree of Protection	IP20
Protection Class (luminaires)	I and II
Weight	52 g
CE requirement	Immunity to electromagnetic interference (EMC) in acc. with EN 61547, Radio interference suppression in acc. with EN 55015, Safety in acc. with EN 61347-2-11

The values specified in this datasheet can change due to technical innovations; any such changes will be made without separate notification.