


# Product Environmental Profile

**Masterpact NW 25 H1 three pole draw out circuit breaker with  
Micrologic 5.0A control unit**






## General information

|                                   |   |
|-----------------------------------|---|
| <b>Representative product</b>     | Masterpact NW 25 H1 three pole draw out circuit breaker with Micrologic 5.0A control unit   |
| <b>Description of the product</b> | <p>The Masterpact NW 25 H1 three pole draw out circuit breaker is designed to guarantee the protection of a low voltage electrical distribution system with assigned voltage up to 690VAC and rated current of 2500A.</p> <p>The breaker can be remotely operated using closing XF release and opening MX release.</p> <p>The Micrologic 5.0A control unit fitted with the circuit breaker enhances protection of electrical installation under fault conditions.</p>                         |
| <b>Functional unit</b>            | <p>Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage up to 690VAC and 2500A rated current. This protection is ensured in accordance with the following parameters:</p> <ul style="list-style-type: none"> <li>- Number of poles: 3</li> <li>- Rated service breaking capacity Ics at 440VAC = 65kA (Ics=100%Icu following IEC 60947-2)</li> <li>- Tripping curve: long time, short time and instantaneous protections</li> </ul> |



## Constituent materials

**Reference product mass** 97Kg including the product, its packaging and additional elements and accessories

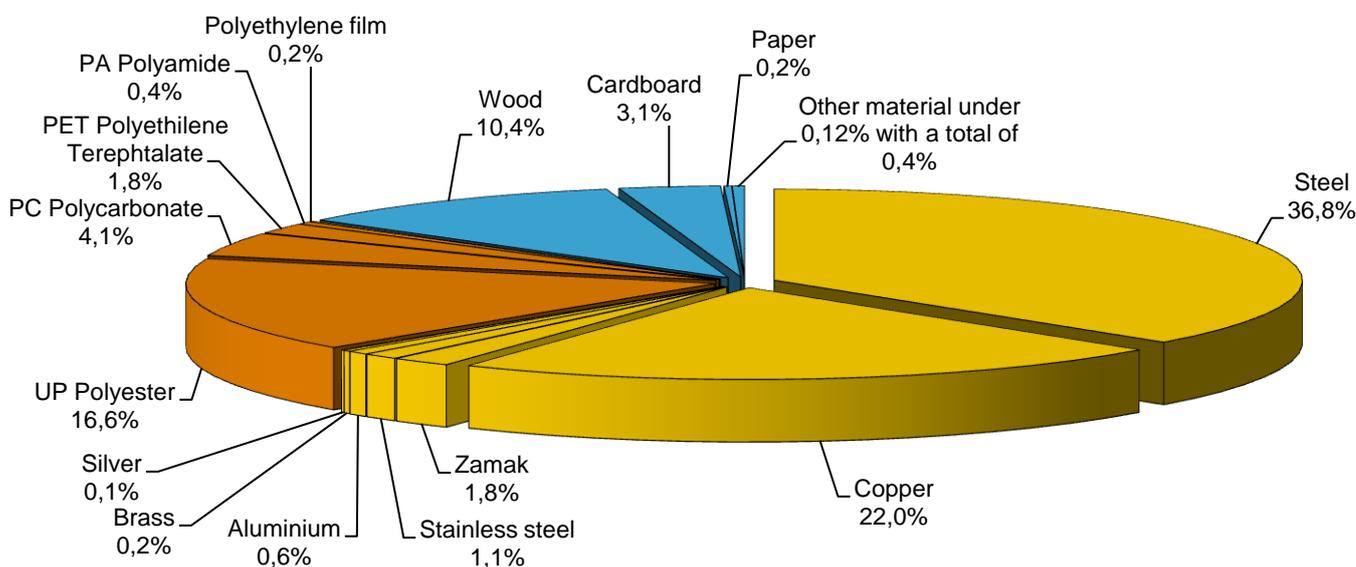

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The Masterpact NW 25 H1 three pole draw out circuit breaker with Micrologic 5.0A control unit presents the following relevant environmental aspects


|                      |  |
|----------------------|--|
| <b>Manufacturing</b> | Manufactured at a Schneider Electric production site ISO14001 certified  |
| <b>Distribution</b>  | Weight and volume of the packaging optimized, based on the European Union's packaging directive<br>Packaging weight is 13,375Kg, consisting of pallet wood (10Kg), cardboard (3Kg), paper (225g) and polyethylene film (150g)<br>Product distribution optimised by setting up local distribution centres   |
| <b>Installation</b>  | The Masterpact NW 25 H1 3P draw out circuit breaker does not need any special installation operation   |
| <b>Use</b>           | The end user must refer to maintenance guide of the product in order to do the appropriate maintenance operations  |
| <b>End of life</b>   | End of life optimized to decrease the amount of waste and allow recovery of the product components and materials<br><br>This product contains a battery (10g) and 4 electronic cards (90g, 46g and 2x9g) that should be separated from the stream of waste so as to optimize end-of-life treatment.<br><br>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website<br><a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a><br><br>Recyclability potential: <b>66%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |



## Environmental impacts

|   |  |   |   |   |
|---|--|---|---|---|
| <b>Reference life time</b>              | 20 years   |   |   |   |
| <b>Product category</b>                 | Passive products - continuous operation  |   |   |   |
| <b>Installation elements</b>            | No special components needed   |   |   |   |
| <b>Use scenario</b>                     | Product dissipation is 150 W considering a 50% load rate, service uptime percentage is 30%.  |   |   |   |
| <b>Geographical representativeness</b>  | China, Europe, US  |   |   |   |
| <b>Technological representativeness</b> | The Masterpact NW 25 H1 three pole draw out circuit breaker is designed to guarantee the protection of a low voltage electrical distribution system with assigned voltage up to 690VAC and rated current of 2500A. The breaker can be remotely operated using closing XF release and opening MX release. The Micrologic 5.0A control unit fitted with the circuit breaker enhances protection of electrical installation under fault conditions. |   |   |   |
| <b>Energy model used</b>                | <b>Manufacturing</b>   | <b>Installation</b>   | <b>Use</b>  | <b>End of life</b>  |
|   | Energy model used: China   | Electricity mix; AC; consumption mix, at consumer; 220V; CN | Electricity mix; AC; consumption mix, at consumer; 220V; CN | Electricity mix; AC; consumption mix, at consumer; 220V; CN |

| Compulsory indicators                            |                                     | Masterpact NW 25 H1 three pole draw out circuit breaker with Micrologic 5.0A control unit |               |              |              |          |             |
|--|-------------------------------------|---|---------------|--------------|--------------|----------|-------------|
| Impact indicators                                | Unit                                | Total   | Manufacturing | Distribution | Installation | Use      | End of Life |
| Contribution to mineral resources depletion      | kg Sb eq                            | 1,36E-01  | 1,36E-01      | 0*           | 0*           | 3,52E-05 | 0*          |
| Contribution to the soil and water acidification | kg SO <sub>2</sub> eq               | 9,63E+00  | 8,59E-01      | 4,88E-02     | 4,02E-03     | 8,69E+00 | 2,47E-02    |
| Contribution to water eutrophication             | kg PO <sub>4</sub> <sup>3-</sup> eq | 2,48E+00  | 1,43E-01      | 1,12E-02     | 9,56E-04     | 2,32E+00 | 6,52E-03    |
| Contribution to global warming                   | kg CO <sub>2</sub> eq               | 8,42E+03  | 3,82E+02      | 1,09E+01     | 1,30E+00     | 8,02E+03 | 1,13E+01    |
| Contribution to ozone layer depletion            | kg CFC11 eq                         | 1,52E-04  | 8,71E-05      | 2,20E-08     | 1,05E-07     | 6,38E-05 | 5,46E-07    |
| Contribution to photochemical oxidation          | kg C <sub>2</sub> H <sub>4</sub> eq | 1,14E+00  | 1,04E-01      | 3,47E-03     | 4,22E-04     | 1,03E+00 | 2,61E-03    |
| Resources use                                    | Unit                                | Total   | Manufacturing | Distribution | Installation | Use      | End of Life |
| Net use of freshwater                            | m3                                  | 1,69E+01  | 7,93E+00      | 0*           | 0*           | 8,95E+00 | 1,07E-02    |
| Total Primary Energy                             | MJ                                  | 1,44E+05  | 8,73E+03      | 1,54E+02     | 2,19E+01     | 1,35E+05 | 1,35E+02    |

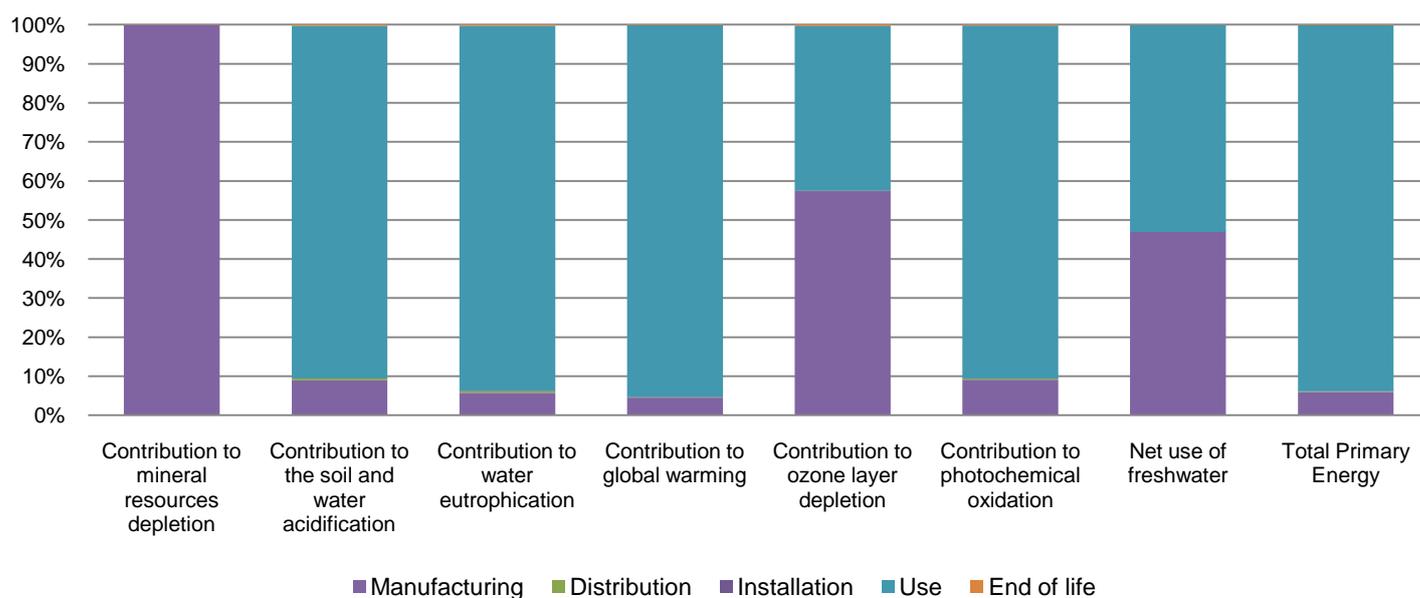

| Optional indicators   |                | Masterpact NW 25 H1 three pole draw out circuit breaker with Micrologic 5.0A control unit |               |              |              |          |             |
|---|----------------|---|---------------|--------------|--------------|----------|-------------|
| Impact indicators   | Unit           | Total   | Manufacturing | Distribution | Installation | Use      | End of Life |
| Contribution to fossil resources depletion  | MJ             | 1,31E+05  | 5,13E+03      | 1,53E+02     | 1,81E+01     | 1,25E+05 | 1,11E+02    |
| Contribution to air pollution   | m <sup>3</sup> | 1,03E+06  | 1,97E+05      | 4,45E+02     | 1,42E+02     | 8,33E+05 | 8,72E+02    |
| Contribution to water pollution   | m <sup>3</sup> | 4,40E+05  | 3,83E+04      | 1,79E+03     | 1,52E+02     | 3,99E+05 | 1,01E+03    |
| Resources use   | Unit           | Total   | Manufacturing | Distribution | Installation | Use      | End of Life |
| Use of secondary material   | kg             | 8,33E+00  | 8,33E+00      | 0*           | 0*           | 0*       | 0*          |
| Total use of renewable primary energy resources   | MJ             | 7,15E+03  | 4,21E+02      | 0*           | 0*           | 6,73E+03 | 0*          |
| Total use of non-renewable primary energy resources   | MJ             | 1,37E+05  | 8,31E+03      | 1,53E+02     | 2,19E+01     | 1,29E+05 | 1,35E+02    |
| Use of renewable primary energy excluding renewable primary energy used as raw material         | MJ             | 6,87E+03  | 1,42E+02      | 0*           | 0*           | 6,73E+03 | 0*          |
| Use of renewable primary energy resources used as raw material                                  | MJ             | 2,80E+02  | 2,80E+02      | 0*           | 0*           | 0*       | 0*          |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ             | 1,37E+05  | 7,99E+03      | 1,53E+02     | 2,19E+01     | 1,29E+05 | 1,35E+02    |
| Use of non renewable primary energy resources used as raw material                              | MJ             | 3,16E+02  | 3,16E+02      | 0*           | 0*           | 0*       | 0*          |

|  |             |              |                      |                     |                     |            |                    |
|--|-------------|--------------|----------------------|---------------------|---------------------|------------|--------------------|
| Use of non renewable secondary fuels   | MJ          | 0,00E+00     | 0*                   | 0*                  | 0*                  | 0*         | 0*                 |
| Use of renewable secondary fuels       | MJ          | 0,00E+00     | 0*                   | 0*                  | 0*                  | 0*         | 0*                 |
| <b>Waste categories</b>                | <b>Unit</b> | <b>Total</b> | <b>Manufacturing</b> | <b>Distribution</b> | <b>Installation</b> | <b>Use</b> | <b>End of Life</b> |
| Hazardous waste disposed               | kg          | 6,05E+03     | 5,66E+03             | 0*                  | 2,68E+01            | 2,59E+02   | 1,12E+02           |
| Non hazardous waste disposed           | kg          | 1,59E+03     | 1,34E+02             | 3,86E-01            | 0*                  | 1,45E+03   | 3,75E-01           |
| Radioactive waste disposed             | kg          | 1,14E-01     | 6,55E-02             | 2,75E-04            | 9,90E-05            | 4,79E-02   | 5,84E-04           |
| <b>Other environmental information</b> | <b>Unit</b> | <b>Total</b> | <b>Manufacturing</b> | <b>Distribution</b> | <b>Installation</b> | <b>Use</b> | <b>End of Life</b> |
| Materials for recycling                | kg          | 6,31E+01     | 8,01E+00             | 0*                  | 0*                  | 0*         | 5,51E+01           |
| Components for reuse                   | kg          | 0,00E+00     | 0*                   | 0*                  | 0*                  | 0*         | 0*                 |
| Materials for energy recovery          | kg          | 1,31E+00     | 1,63E-01             | 0*                  | 7,50E-03            | 0*         | 1,14E+00           |
| Exported Energy                        | MJ          | 0,00E+00     | 0*                   | 0*                  | 0*                  | 0*         | 0*                 |

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

|   |                      |                                     |  |
|---|----------------------|-------------------------------------|--|
| Registration N°   | SCHN-00060-V01.01-EN | Drafting rules                      | PCR-ed3-EN-2015 04 02  |
| Verifier accreditation N°   | VH08                 | Supplemented by                     | PSR-0005-ed2-EN-2016 03 29   |
| Date of issue   | 04-2016              | Information and reference documents | <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a> |
|   |                      | Validity period                     | 5 years  |
| Independent verification of the declaration and data, in compliance with ISO 14025 : 2010                                   |                      |                                     |  |
| Internal  | External             | X                                   |  |
| The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)                                     |                      |                                     |  |
| The elements of the present PEP cannot be compared with elements from another program.                                      |                      |                                     |  |
| Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations » |                      |                                     |  |



Schneider Electric Industries SAS

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

Country Customer Care Center:

<http://www2.schneider-electric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

SCHN-00060-V01.01-EN

© 2015 - Schneider Electric – All rights reserved

04-2016