

EasyLogic™ Sensors

Duct Humidity & Temperature Transmitters

CP-AI-TH-SE



Product Description

The CP-AI-TH-SE is a series of duct-mount humidity and temperature transmitters designed for environmental monitoring and HVAC control applications. These devices measure relative humidity and temperature in a wide range of conditions.

These sensors are ideal for:

- HVAC system control for improved comfort and energy savings
- Hospitals, schools, museums and other workplaces requiring humidity control

Features

- High accuracy measurement
- Two terminal outputs: 4 to 20 mA or 0 to 10 Vdc
- Temperature sensing element: PT1000/10K thermistor/ integrated circuit
- Temperature output: passive/active
- Supports DC and AC power supplies
- Key component for the LEED green building program, WELL Building Standard and RESET® Standard*
- Compliant with ASHRAE standards for environmental control and indoor air quality

*Leadership in Energy and Environmental Design (LEED) is a registered trademark of the US Green Building Council. The WELL Building Standard is a trademark of the International WELL Building Institute in the United States and other countries.

Available Products

Part Number	Description
CP-AI-TH-SE-5200	Duct-mount humidity and temperature transmitter, 2% RH, PT1000
CP-AI-TH-SE-6200	Duct-mount humidity and temperature transmitter, 2% RH, NTC 10K thermistor
CP-AI-TH-SE-1200	Duct-mount humidity and temperature transmitter, 2% RH, Digital temperature sensor

Specifications

General	
Operating voltage	24 Vac ±10% or 12 to 30 Vdc*
Frequency	50/60Hz
Power consumption	≤1 VA
Humidity Sensor	
Sensor type	Solid state, integrated circuit
Measuring range	0 to 100% RH (non-condensing)
Accuracy	2% FS (@ 25 °C, 20 to 80% RH)**
Hysteresis	1.5% RH (@ 25 °C)
Analog output	DC power supply: 0 to 10V/4 to 20mA AC power supply: 0 to 10V
Output power	Min. load resistance for 0 to 10V operation: 10kΩ Min. input voltage for 4 to 20mA operation: 250 Ω loop = 19.2 VDC; 500 Ω loop = 21.6 VDC
Long term stability	0.5% RH per year***
Time constant	Approx. 20s in moving air
Temperature Sensor	
Sensor type	PT1000 Class A/10K type 3 thermistor/ integrated circuit
Measuring range	-40 to 60 °C
Sensor accuracy	0.15°C @ 0 °C (for PT1000), 0.2°C @ 25 °C (for 10K thermistor), 0.2°C @ 25 °C (for integrated circuit)
Output	Passive/active
Time constant	Approx. 20s in moving air
Environmental	
Operating temperature	-40 to 60 °C
Operating humidity	0 to 100% RH (non-condensing)
Storage temperature	-40 to 60 °C
Storage humidity	0 to 100% RH (non-condensing)
IP rating	IP65
Housing material	PC+ABS, UL94-V0
Protection class	Class III

North America (USA): +1 888 444 1311
 Europe, Middle East & Africa (Sweden): +46 10 478 2000
 Asia Pacific (Singapore): +65 6484 7877
 product.support@schneider-electric.com
 se.com

Life Is On | **Schneider**
Electric

Specifications (cont.)

Regulatory Information	
Agency approvals	CE: EMC (EN61326-1) Green Premium: EU ROHS, China ROHS, REACH, RCM (Australia), UKCA (UK)
Weight	
Including packaging	350 g

*Class 2. Connect all devices with proper polarity; AC power supply only supports 0 to 10V output.
**Include hysteresis, linearity and repeatability.
***Typical value for a lab environment. Value may be higher in environments with with vaporized solvents, outgassing tapes, adhesives, packaging materials, etc.

Safety Information

Important Information

Read these instructions carefully and look at the equipment to become familiar with the device before trying to install, operate, service or maintain it. The following special message may appear throughout this bulletin or on the equipment to warn of potential hazards or to call attention to information that clarifies or simplifies a procedure.


NOTICE
NOTICE is used to address practices not related to physical injury.

Please Note

Electrical equipment should be installed, operated, serviced and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

A qualified person is one who has the skills and knowledge related to the construction, installation and operation of electrical equipment and has received safety training to recognize and avoid the hazards involved.

Dimensions (mm)

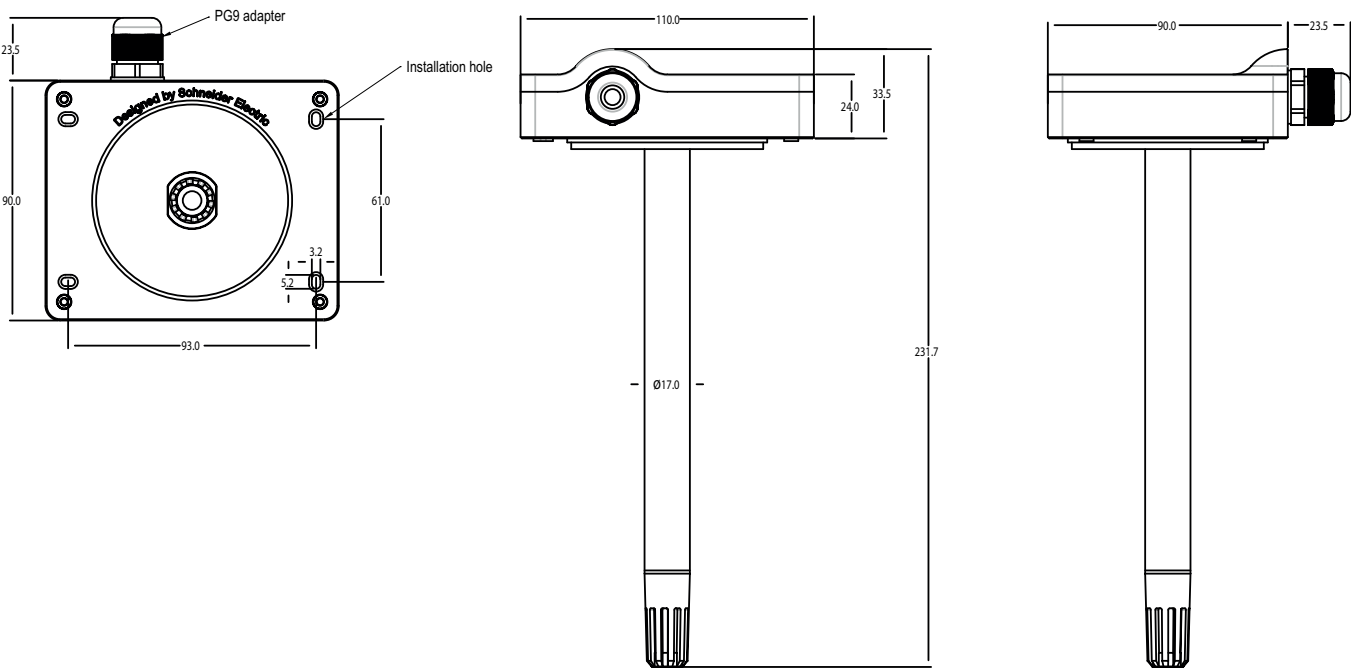

North America (USA): +1 888 444 1311
Europe, Middle East & Africa (Sweden): +46 10 478 2000
Asia Pacific (Singapore): +65 6484 7877
product.support@schneider-electric.com
se.com

Installation

1. Disconnect power prior to installation.
2. Drill a hole ≥ 18 mm in the duct at the measurement point. Insert the probe into the duct.
3. Open the front housing and mount the housing box to the duct using the attached self-tapping screw.
4. Note that the PG-9 fitting should point downward to avoid water entering the housing.
5. Wire according to the diagrams in the Wiring section below.
6. Tighten the waterproof PG-9 fitting. Replace the front housing and tighten the screws.

Wiring

NOTICE

PRODUCT DAMAGE DUE TO INCORRECT POWER POLARITY

- Power polarity must be observed with a DC supply as well as an AC supply. If the power supply is connected incorrectly, this can lead to the destruction of the sensor.

Failure to follow these instructions may result in product damage.


NOTICE

INACCURATE READINGS

- Do not install this product in hazardous or corrosive locations.
- Long term exposure to high humidity(>80% RH) may temporarily offset the humidity signal. After returning into the normal environment the sensor will recover to within specifications by itself.
- For temperature sensing elements PT1000/10K thermistor, the wire resistance between the controller and the product may influence measuring accuracy.


Failure to follow these instructions can result in reduced accuracy.

CP-AI-TH-SE-5200




VCC	24VDC + or 24VAC L
GND	Ground (-)
VO	0-10V output (RH)
IO	4-20mA output (RH)
T	PT1000 output(Temp)

CP-AI-TH-SE-6200



VCC	24VDC + or 24VAC L
GND	Ground (-)
VO	0-10V output (RH)
IO	4-20mA output (RH)
T	NTC 10K output(Temp)

CP-AI-TH-SE-1200



VCC	24VDC + or 24VAC L
GND	Ground (-)
VOH	0-10V output (RH)
IOH	4-20mA output (RH)
VOT	0-10V output (Temp)
IOT	4-20mA output (Temp)

Cyber Security

At Schneider Electric, we have always considered cyber security as a key requirement and are committed to providing more reliable, stable and secure products to minimize potential cyber risks and better protect customer life, property and the environment.

Cybersecurity aims to protect your systems, communications networks, devices, etc., from possible attacks such as destruction, data tampering, or disclosure of confidential information. In addition to the recommendations in this article, it is strongly recommended that you follow the Schneider Electric Defense in Depth approach to cybersecurity. In our system technical note "How to reduce vulnerability to cyber attacks?" This method is described in In addition, you can find more useful resources and up-to-date information at Schneider Electric's Cybersecurity Support Portal.

Communication Security

Communication port used for Schneider Electric.

Security Disposal

When equipment needs to be disposed, it is recommended to destroy it through a safe channel to ensure that the equipment is not re-deployed to your operational systems or illegally exploited.

Cybersecurity Vulnerability/Incidents

You can access the Schneider Electric Cybersecurity Support Portal (<https://www.se.com/ww/en/work/support/cybersecurity/vulnerability-policy.jsp>) to check the vulnerability management policy or report potential cybersecurity vulnerability or incidents.

China RoHS Compliance Information
Environment-Friendly Use Period (EFUP) Table

部件名称 Part Name	有害物质 / Hazardous Substances					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr (VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
塑料 Plastic parts	O	O	O	O	O	O
电子元器件 Electronic	X	O	O	O	O	O
金属部件 Metal parts	X	O	O	O	O	O
触点 Electrical contacts	O	O	O	O	O	O
线缆和线缆附件 Cables & cabling accessories	O	O	O	O	O	O

本表格依据SJ/T11364的规定编制
O: 表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。
X: 表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。
本表中标有“X”的所有部件均符合欧盟RoHS法规
This table is made according to SJ/T 11364.
O: Indicates that the concentration of hazardous substance in all of the homogeneous materials for this part is below the limit as stipulated in GB/T 26572.
X: Indicates that concentration of hazardous substance in at least one of the homogeneous materials used for this part is above the limit as stipulated in GB/T 26572.
All the parts with “X” comply with EU ROHS.