



Product Environmental Profile

RESI9 & ACTI9 COMB BUSBAR



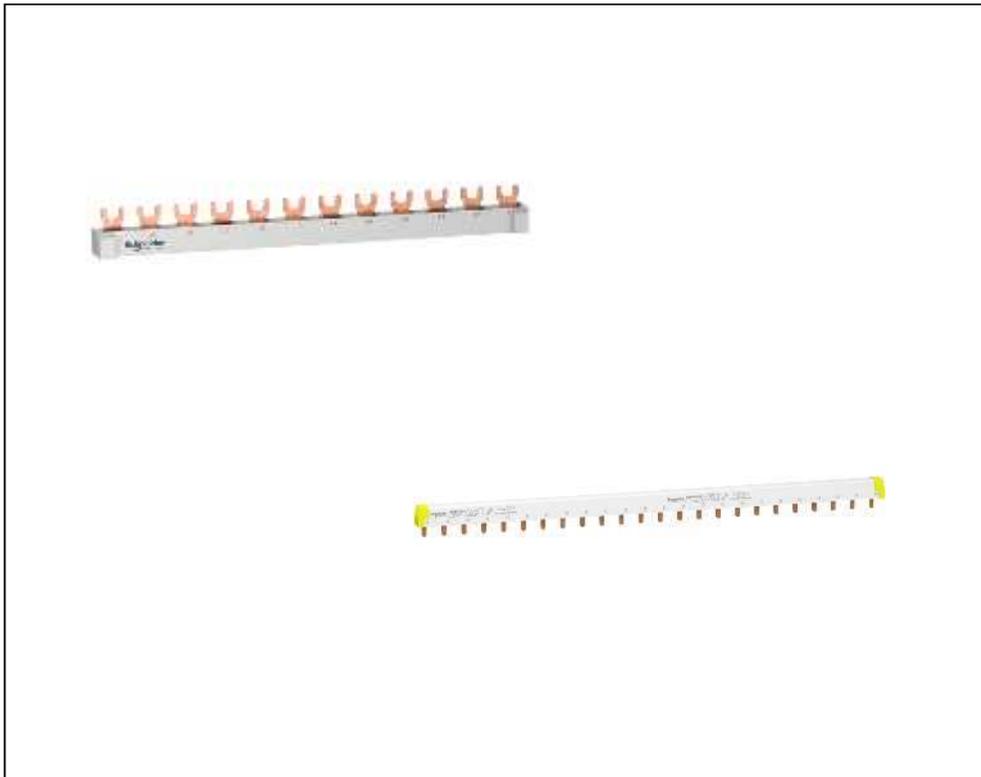


General information

Representative product	RESI9 & ACTI9 COMB BUSBAR -R9XFH312
Description of the product	Comb busbar use to distribute and sub-distribute the electric power supply and it can fast assemble and disassemble the connected devices
Functional unit	To transmit energy expressed for 1A over a distance of 1 km during 30 years and a 70% use rate in accordance with the relevant standards.



Constituent materials

Reference product mass 98.1 g including the product, its packaging and additional elements and accessories

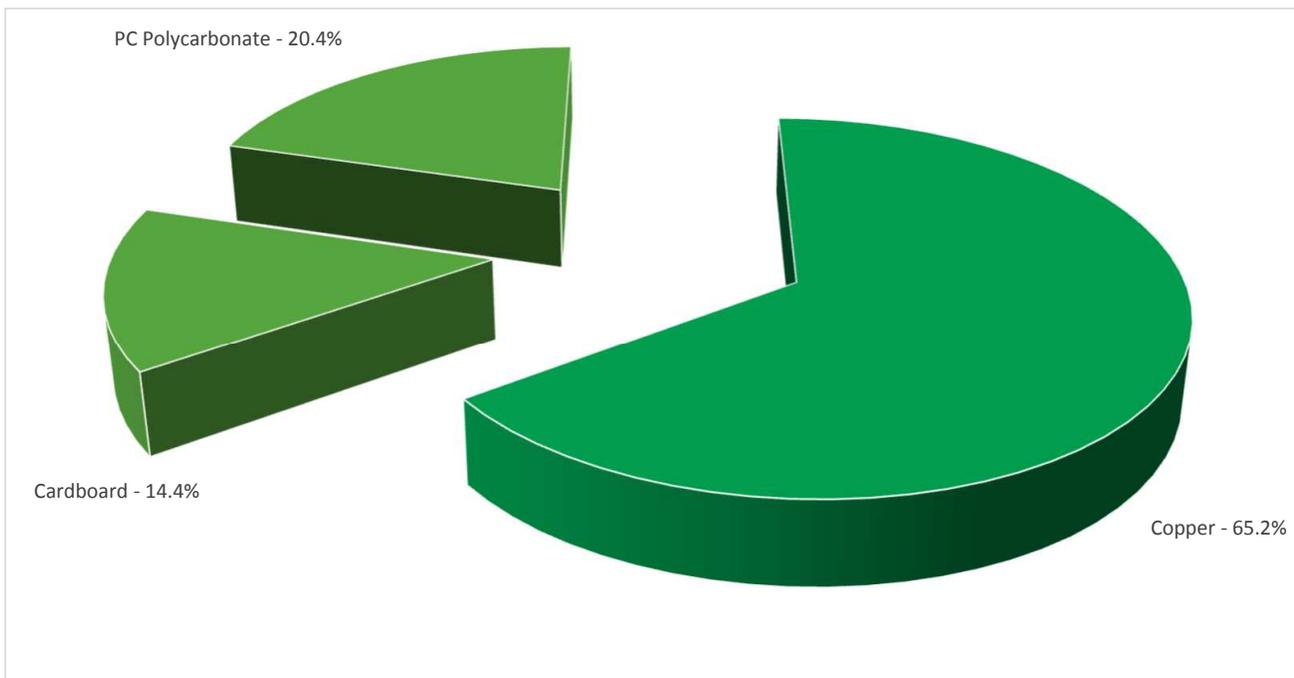

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The RESI9 & ACTI9 COMB BUSBAR presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 14.1 g, consisting of cardboard(100%)
Installation	RESI9 FORK COMB BUSBAR_R9XFH312 does not require any installation operations
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 65% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	30 years		
Product category	Enclosures		
Installation elements	No special components needed		
Use scenario	This product does not have any energy consumption 0		
Geographical representativeness	Europe		
Technological representativeness	Comb busbar use to distribute and sub-distribute the electric power supply and it can fast assemble and disassemble the connected devices		
Energy model used	Manufacturing	Installation	Use
	Energy model used: Germany	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix, AC, consumption mix, at consumer; < 1kV; EU-27
			End of life
			Electricity grid mix, AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		RESI9 & ACTI9 COMB BUSBAR - R9XFH312					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.74E-06	2.74E-06	5.07E-10	0*	0*	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.05E-03	9.65E-04	5.78E-05	4.04E-06	0*	2.49E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	5.10E-03	5.08E-03	1.33E-05	9.49E-07	0*	6.46E-06
Contribution to global warming	kg CO ₂ eq	3.98E-01	3.74E-01	1.27E-02	1.31E-03	0*	1.09E-02
Contribution to ozone layer depletion	kg CFC11 eq	2.23E-07	2.22E-07	2.56E-11	8.24E-11	0*	5.50E-10
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	7.93E-05	7.21E-05	4.12E-06	4.38E-07	0*	2.63E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	6.16E-03	6.15E-03	1.13E-06	1.60E-06	0*	1.07E-05
Total Primary Energy	MJ	5.00E+00	4.68E+00	1.79E-01	2.04E-02	0*	1.23E-01

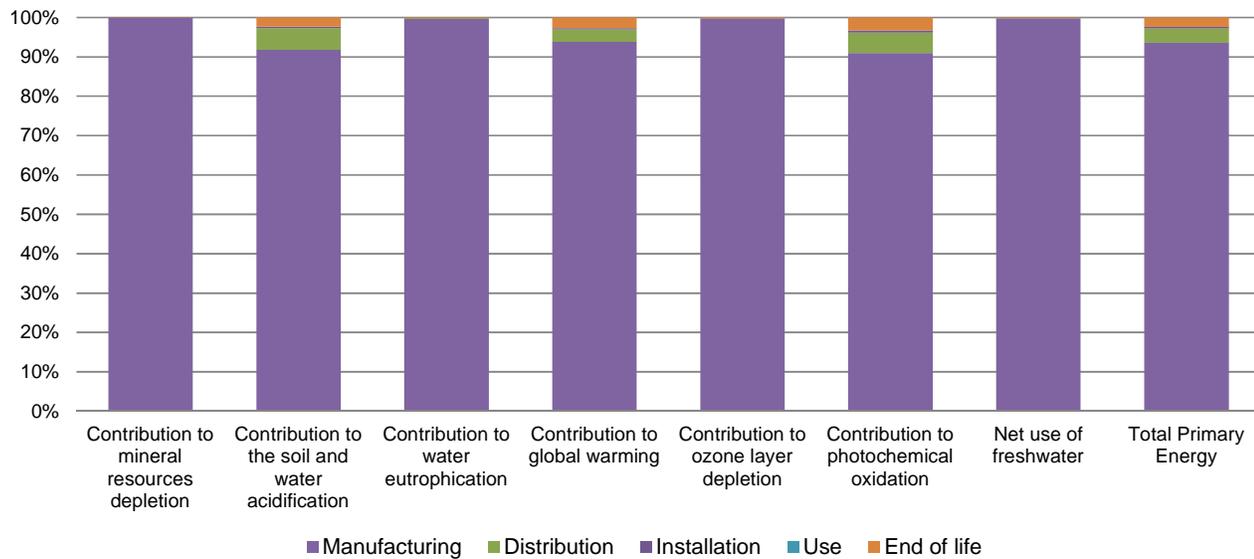

Optional indicators		RESI9 & ACTI9 COMB BUSBAR - R9XFH312					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5.04E+00	4.73E+00	1.78E-01	1.86E-02	0*	1.12E-01
Contribution to air pollution	m³	1.57E+01	1.42E+01	5.38E-01	1.44E-01	0*	8.79E-01
Contribution to water pollution	m³	1.65E+02	1.61E+02	2.08E+00	1.54E-01	0*	1.01E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6.86E-02	6.86E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	4.11E-01	4.10E-01	2.39E-04	0*	0*	1.37E-04
Total use of non-renewable primary energy resources	MJ	4.59E+00	4.27E+00	1.79E-01	2.04E-02	0*	1.23E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.20E-01	1.20E-01	2.39E-04	2.29E-05	0*	1.37E-04
Use of renewable primary energy resources used as raw material	MJ	2.91E-01	2.91E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.88E+00	3.56E+00	1.79E-01	2.04E-02	0*	1.23E-01
Use of non renewable primary energy resources used as raw material	MJ	7.10E-01	7.10E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.02E+00	8.95E-01	0*	1.42E-02	0*	1.14E-01
Non hazardous waste disposed	kg	2.83E-01	2.82E-01	4.50E-04	6.31E-05	0*	3.77E-04
Radioactive waste disposed	kg	2.29E-04	2.28E-04	3.20E-07	9.62E-08	0*	5.90E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	7.84E-02	9.96E-03	0*	1.40E-02	0*	5.44E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.15E-03	1.45E-04	0*	0*	0*	1.00E-03
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2016-11.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	ENVPEP1707001_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	07/2017	Supplemented by	PSR-0001-ed3-EN-2015 10 16
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			

Schneider Electric Industries SAS

CATHERINE COLIN

catherine.colin@fr.schneider-electric.com

Country Customer Care Center :

<http://www2.schneider-electric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1707001_V1

© 2016 - Schneider Electric – All rights reserved

07/2017