Product Environmental Profile

Preventa Safety Modules, Universal Range










ENVPEP1811003EN_V1 - SCHN-00411-V01.01-EN

General information

| Representative product | Preventa Safety Modules, Universal Range - XPSUAT13A3AP | | | | |
|--------------------------|---|--|--|--|--|
| Description of the range | The Preventa XPSU range brings a reworked design that helps to simplify installation and maintenance. Moreover, they offer innovative features that improve the user experience for operators. The Preventa XPSU safety module series is supporting the integration of machines in digital service and predictive maintenance concepts. The environmental impacts of this referenced product are representative of the impacts of the | | | | |
| | other products of the range which are developed with a similar technology. | | | | |
| Functional unit | To monitor signals from a variety of different sensors/devices for safety-related interruption of safety-related electrical circuits at 100% for 10 years. | | | | |

Constituent materials

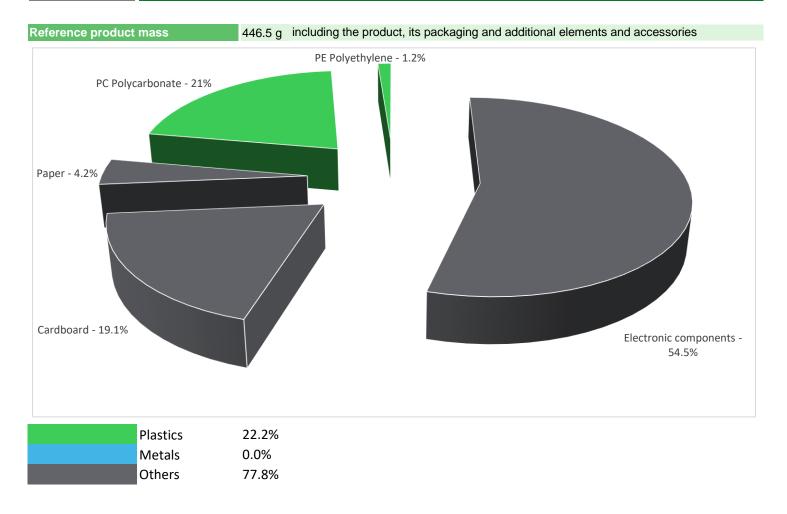

Substance assessment

E

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

| The | Preventa Safety Modules, Universal Range presents the following relevent environmental aspects | | | | | | |
|---------------|--|--|--|--|--|--|--|
| Manufacturing | Manufactured at a Schneider Electric production site ISO14001 certified | | | | | | |
| | Weight and volume of the packaging optimized, based on the European Union's packaging directive | | | | | | |
| Distribution | Packaging weight is 110.3 g, consisting of cardboard (78%), paper (16%) and polyethylene film (6%) | | | | | | |
| Installation | Does not require any specific installation operations | | | | | | |
| Use | The product does not require special maintenance operations. | | | | | | |
| End of life | End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains electronic cards (245g) that should be separated from the stream of waste so as to optimize end- of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which | | | | | | |
| | is available on the Schneider-Electric Green Premium website | | | | | | |
| | http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page | | | | | | |
| | Recyclability potential:13%Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). | | | | | | |

\mathcal{O} Environmental impacts

| Reference life time | 10 years | | | | | |
|---------------------------------|--|--|--|---|--|--|
| Installation elements | No special components needed | | | | | |
| Use scenario | The product is in active mode 100% of the time with a power use of 3W for 10 years | | | | | |
| Geographical representativeness | Europe | | | | | |
| | Manufacturing | Installation | Use | End of life | | |
| Energy model used | Energy model used: Indonesia | Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27 | Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27 | Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27 | | |

| Compulsory indicators | | Preventa Sa | fety Modules, Uni | versal Range | - XPSUAT13A | 3AP | |
|--|-------------------------|-------------|-------------------|--------------|--------------|----------|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to mineral resources depletion | kg Sb eq | 5.28E-03 | 5.27E-03 | 0* | 0* | 1.12E-05 | 0* |
| Contribution to the soil and water acidification | kg SO_2 eq | 5.53E-01 | 1.51E-02 | 2.63E-04 | 0* | 5.37E-01 | 2.10E-04 |
| Contribution to water eutrophication | kg PO4 ³⁻ eq | 4.06E-02 | 7.96E-03 | 6.06E-05 | 0* | 3.24E-02 | 1.17E-04 |
| Contribution to global warming | kg CO_2 eq | 1.34E+02 | 5.18E+00 | 5.76E-02 | 0* | 1.29E+02 | 3.89E-01 |
| Contribution to ozone layer depletion | kg CFC11 eq | 9.06E-06 | 6.63E-07 | 0* | 0* | 8.39E-06 | 1.32E-08 |
| Contribution to photochemical oxidation | kg C_2H_4 eq | 3.09E-02 | 1.30E-03 | 1.88E-05 | 0* | 2.95E-02 | 1.61E-05 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Net use of freshwater | m3 | 4.67E+02 | 0* | 0* | 0* | 4.67E+02 | 0* |
| Total Primary Energy | MJ | 2.67E+03 | 9.58E+01 | 8.15E-01 | 0* | 2.57E+03 | 8.59E-01 |

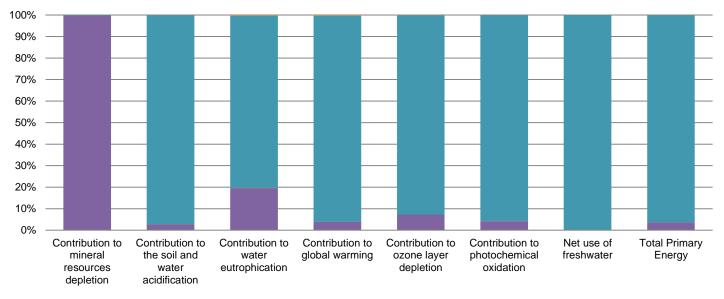

Manufacturing Distribution Installation Use End of life

| Optional indicators | | Preventa Sa | fety Modules, Uni | versal Range | - XPSUAT13A | ЗАР | |
|---|------|-------------|-------------------|--------------|--------------|----------|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to fossil resources depletion | MJ | 1.52E+03 | 5.65E+01 | 8.09E-01 | 0* | 1.46E+03 | 7.09E-01 |
| Contribution to air pollution | m³ | 6.39E+03 | 8.35E+02 | 2.45E+00 | 0* | 5.54E+03 | 6.23E+00 |
| Contribution to water pollution | m³ | 6.01E+03 | 6.74E+02 | 9.47E+00 | 0* | 5.31E+03 | 1.55E+01 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Use of secondary material | kg | 2.06E-02 | 2.06E-02 | 0* | 0* | 0* | 0* |
| Total use of renewable primary energy resources | MJ | 3.30E+02 | 3.47E+00 | 0* | 0* | 3.27E+02 | 0* |
| Total use of non-renewable primary energy resources | MJ | 2.34E+03 | 9.23E+01 | 8.13E-01 | 0* | 2.24E+03 | 8.58E-01 |
| Use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 3.29E+02 | 1.69E+00 | 0* | 0* | 3.27E+02 | 0* |
| Use of renewable primary energy resources used as raw material | MJ | 1.77E+00 | 1.77E+00 | 0* | 0* | 0* | 0* |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 2.33E+03 | 8.73E+01 | 8.13E-01 | 0* | 2.24E+03 | 8.58E-01 |
| Use of non renewable primary energy resources used as raw material | MJ | 5.06E+00 | 5.06E+00 | 0* | 0* | 0* | 0* |
| Use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |

ENVPEP1811003EN_V1 - SCHN-00411-V01.01-EN

| Waste categories | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
|---------------------------------|------|----------|---------------|--------------|--------------|----------|-------------|
| Hazardous waste disposed | kg | 6.85E+00 | 5.90E+00 | 0* | 1.64E-03 | 6.71E-02 | 8.82E-01 |
| Non hazardous waste disposed | kg | 4.82E+02 | 1.46E+00 | 0* | 0* | 4.80E+02 | 0* |
| Radioactive waste disposed | kg | 3.22E-01 | 1.39E-03 | 0* | 0* | 3.21E-01 | 0* |
| Other environmental information | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Materials for recycling | kg | 1.68E-01 | 1.58E-02 | 0* | 1.09E-01 | 0* | 4.39E-02 |
| Components for reuse | kg | 1.02E-02 | 1.02E-02 | 0* | 0* | 0* | 0* |
| Materials for energy recovery | kg | 1.11E-01 | 6.95E-04 | 0* | 5.50E-05 | 0* | 1.10E-01 |
| Exported Energy | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.0, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

Depending on the impact analysis, the environmental indicators of other products in this family may be proportional extrapolated by energy consumption values. For Mineral Resources Depletion, impact may be proportional extrapolated by mass of the product. Other impact categories may be proportional extrapolated by energy consumption. Water Eutrophication may be proportional at 20% by the product mass and at 80% by energy consumption values.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

| Registration number : | SCHN-00411-V01.01-EN | Drafting rules | PCR-ed3-EN-2015 04 02 | | |
|---|---------------------------------------|--|----------------------------------|--|--|
| Verifier accreditation N° | VH33 | | | | |
| Date of issue | 02/2019 | Information and reference documents | e <u>www.pep-ecopassport.org</u> | | |
| | | Validity period | 5 years | | |
| Independent verification of | the declaration and data, in complian | ce with ISO 14025 : 2010 | | | |
| Internal | External X | | | | |
| The PCR review was condu | ucted by a panel of experts chaired b | y Philippe Osset (SOLINNEN) | | | |
| PEP are compliant with XP | C08-100-1 :2014 | | | | |
| The elements of the present PEP cannot be compared with elements from another program. | | | | | |
| Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations » | | | | | |

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00411-V01.01-EN

Published by Schneider Electric © 2019 - Schneider Electric – All rights reserved