


# EB2AL EB4AL EB6AL EB10AL EB12AL EB20AL

568710 568711 568712 568713 568714 568715

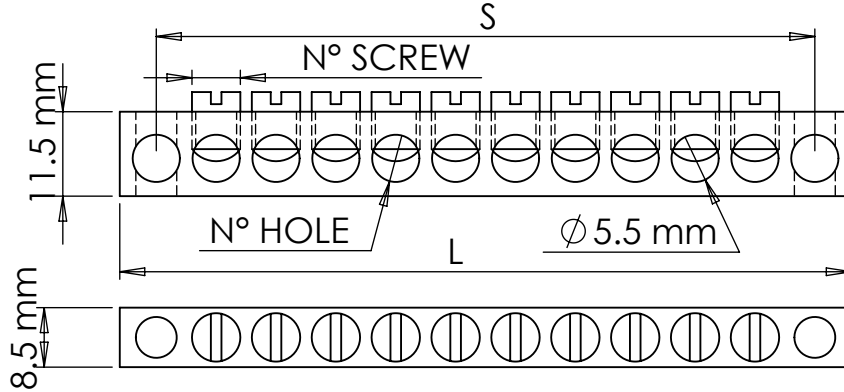

Reference	N° HOLE	N° SCREW	L (mm)	S (mm)	Thread	MOUNTING HOLE POSITION
EB2AL	3	2	24.13	-	1/4"x28 UNF	2
EB4AL	6	4	47.75	23.8	1/4"x28 UNF	1 & 4
EB6AL	8	6	65.00	23.8	1/4"x28 UNF	4 & 7
EB10AL	12	10	96.77	87.1	1/4"x28 UNF	1 & 12
EB12AL	14	12	112.50	103	1/4"x28 UNF	1 & 14
EB20AL	22	20	176.00	166.3	1/4"x28 UNF	1 & 22

Reference	Ampacity Value (A)	Copper Stranded	Solid Copper	Aluminum Stranded	Solid Aluminum	Torque 14-8 AWG 2,5 to 6mm <sup>2</sup>	Torque 6-4 AWG 10-16 mm <sup>2</sup>	Strip Length min. (mm)
EB2AL	85	14 to 4 AWG or 2,5 to 16mm <sup>2</sup>	14 to 8 AWG or 2,5 to 6 mm <sup>2</sup>	8 to 4 AWG or 10 to 16mm <sup>2</sup>	12 to 8 AWG 4 to 6 mm <sup>2</sup>	20 lbs-in 2,3 Nm	31 lbs-in 3,5 Nm	10.2
EB4AL								
EB6AL								
EB10AL								
EB12AL								
EB20AL								

**WARNING:**

- nVent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at [www.nVent.com](http://www.nVent.com) and from your nVent customer service representative.
- nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
- All instructions must be completely followed to ensure proper and safe installation and performance.
- Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.

**SAFETY INSTRUCTIONS:**

All governing codes and regulations and those required by the job site must be observed.  
Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

nVent, CADDY, ERICO CADWELD, ERICO CRITEC, ERICO, ERIFLEX, and LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.