


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


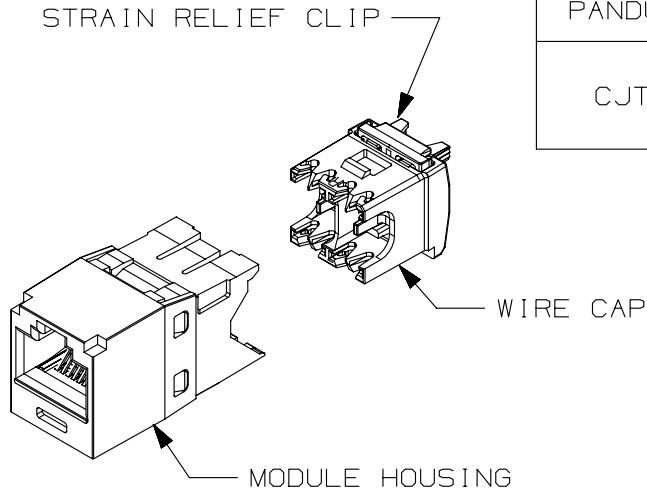


PANDUIT PART#	DESCRIPTION	WEIGHT*
CJT5E88TG**	8 POSITION, 8 WIRE UNIVERSAL 28/30 AWG CATEGORY 5e JACK MODULE. YELLOW WIRE CAP IS COLOR CODED FOR T568A AND T568B WIRING SCHEMES.	1.53 LB/100 PCS (695g/100 PCS)

*WEIGHT IS APPROXIMATE
**JACK COLOR SUFFIX

NOTES:

1. YELLOW WIRE CAP AND STRAIN CLIP DESIGNATE 28/30 AWG, CATEGORY 5e PERFORMANCE.
2. TO DESIGNATE A JACK COLOR, ADD A TWO LETTER COLOR SUFFIX. SEE CURRENT CATALOG FOR AVAILABLE PART NUMBER SUFFIXES.
3. MATERIAL:
MODULE HOUSING - UL94V-0 ABS
WIRE CAP - UL94V-0 PC
STRAIN RELIEF CLIP - UL94V-0 PC
4. ALL TX5e CAT5e 8 POSITION, 8 WIRE CONNECTOR MODULES ARE UNIVERSAL IN DESIGN. THEY ACCEPT SIX AND EIGHT POSITION MODULAR PLUGS WITHOUT DAMAGE.
5. DIMENSIONS IN BRACKETS ARE IN METRIC.

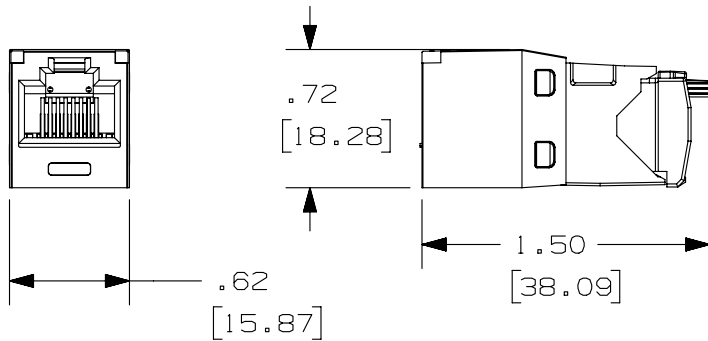

PART NUMBER		CJT5E88TG**	
TITLE			
TX5E CATEGORY 5E 28/30 AWG JACK MODULE			
CUSTOMER DRAWING			
ITEM REVISION NAME		11M309AB/00	
DATASET FILE NAME		11M309AB_DC02/00B	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.x ± .xx ± .03 (.8)		SEE NOTE 3	
.xxx ± .010 (.3)		DRAWING NUMBER:	
ANGLES ±		11M309AB-02	
THIRD ANGLE PROJECTION		SHT 1 OF 1	
DRAWN BY	DATE	CHK	SCALE
KSM	12-21-11	MBVE	FULL
REV	DATE	BY	CHK
1	6-23-14	MDJR	REFR
R	12-21-11	KSM	MBVE

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	6-23-14	MDJR	REFR	EJH	A. UPDATED TITLE BLOCK.	11M309AB-02
R	12-21-11	KSM	MBVE	KSM	RELEASED TO PRODUCTION	11M309AB-02

D10100DA/14