


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

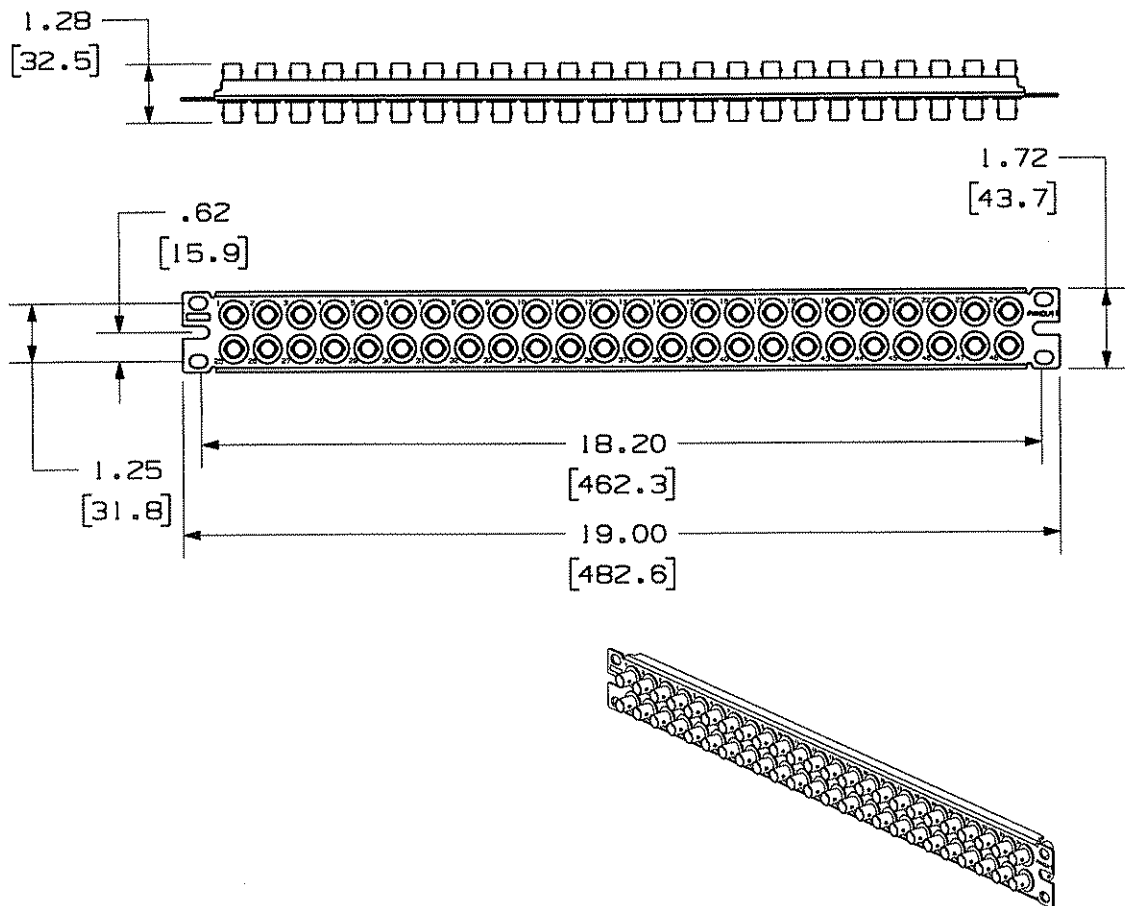

PANDUIT P/N	WEIGHT
CP48BNCBLY	1.57 LB/EACH PC (712.9 g/EACH PC)

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
- SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
- PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- FOR FREQUENCY RANGE FROM 10-250MHz, WITH MEASUREMENTS CALCULATED AT 250MHz, TYPICAL RESULTS ARE INDUCTANCE 9.18nH, CAPACITANCE 1.6pF.
- ATTENUATION AND RETURN LOSS AT 22.68 MHz, THE SIGNAL FREQUENCY FOR DS3, GIVES RESULTS OF -.1 DB AND -30 DB RESPECTIVELY.
- PART INCLUDES:
 - (1) -48 PORT PANEL WITH BNC COUPLERS ASSEMBLED
 - (1) -SCREW KIT (INCLUDES FOUR #12-24 SCREWS)
 - (1) -SCREW KIT (INCLUDES FOUR M6 SCREWS)

MODEL FILENAME	M01156AA_ASSY_02.PRT	SIZE	A
DRAWING FILENAME	M02479CF_DC59_00A.PRT		

48 PORT 75 ohm BNC PATCH PANEL
CUSTOMER DRAWING

	I.I. NUMBER	N/A	
	PRODUCT SPEC	N/A	
	WORK INSTRUCTION	N/A	
	SCALE	NONE	
THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± .010(.31) (.XX) ± .031(.8) ANGLES ±	PART NO.	CP48BNCBLY
DRAWN BY	JsP	MATERIAL	BNC BODY- BRASS BNC CONTACT- NICKEL PLATED BNC INSULATOR- PLASTIC PANEL- STEEL
DATE	4-19-06	PART NO.	CP48BNCBLY
CHK'D	MJD	DRAWING NO.	02479-059

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	4-19-06	JsP	MJD	RELEASED TO PRODUCTION	02479-059				