


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

TWIST TIE

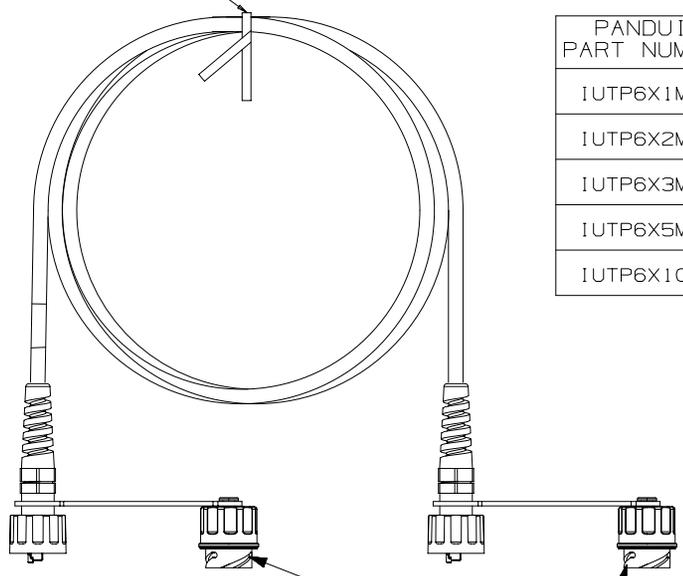

PANDUIT PART NUMBER	MIN. CABLE LENGTH	WEIGHT
IUTP6X1MBL	1 M	1.82 lbs/10 PCS (825.8 g/10 PCS)
IUTP6X2MBL	2 M	3.64 lbs/10 PCS (1651.6 g/10 PCS)
IUTP6X3MBL	3 M	5.46 lbs/10 PCS (2477.5 g/10 PCS)
IUTP6X5MBL	5 M	9.10 lbs/10 PCS (4129.1 g/10 PCS)
IUTP6X10MBL	10 M	18.20 lbs/10 PCS (8.258 kg/10 PCS)

NOTES:

- **1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND OR PACKAGE QUANTITY.
- 2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
- 3. DIMENSIONS IN PARENTHESES ARE IN METRIC.
- 4. CABLE MEETS CATEGORY 6A REQUIREMENTS AND CURRENT ODVA REQUIREMENTS FOR INDUSTRIAL CABLE.
- 5. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

T568B WIRING

PLUG POSITION	CABLE WIRE
1	WHITE ORANGE
2	ORANGE
3	WHITE GREEN
4	BLUE
5	WHITE BLUE
6	GREEN
7	WHITE BROWN
8	BROWN

PLUG CAPS

PART NUMBER		IUTP6X*MBL	
TITLE			
CATEGORY 6A INDUSTRIALNET, UNSHIELDED, STRANDED, PATCH CORDS WITH PANDUIT PLUG CAPS			
CUSTOMER DRAWING			
ITEM REVISION NAME		00251NAE/00	
DATASET FILE NAME		00251NAE_DC02/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.x ± .xxx ± .010 (.3)			
.xx ± .03 (.8) ANGLES ±		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		00251NAE-02	
DRAWN BY	DATE	CHK	SCALE
BJN	7-22-16	SCAL	NONE
SHT 1 OF 1			SIZE
			A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
R	8-2-16	BJN	SCAL	RDE	RELEASED TO PRODUCTION	00251NAE-02

D10100DA/14