

Material	High Conductivity Seamless Copper Tube						
Plating	Electro-Tin						
Wire Size	2/0 AWG]					
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric						— .59 R Re
Wire Strip Length	1-9/16 in.	.85±.04		N125 2/0 STR CU LCC2/0-12D			PANDUIT
Stud Size	1/2 in.		PAN B	2/0 S			PAN
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.50±.04 —		1.00±.0	2 →		53±.02 D (2) PLS
UL Temperature Rating	90° C		-		4.0)7±.06	
C.S.A Certified Wire Connector	Yes						
Panduit Color Code on Barrel	BLACK						
Panduit Die Index No. on Barrel	P45						-
Alternate Industry Die Index No. () on Barrel	(13)					/	





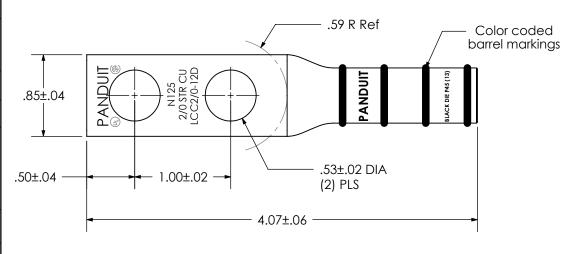

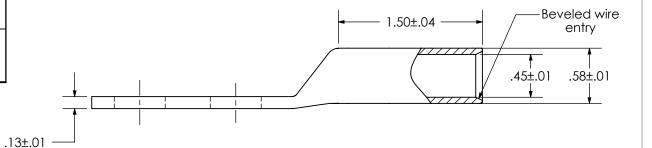

						CORP. TINLEY PARK, ILLINOIS		
00	12/02	SAB	DRL	RELEASED	10333	LCC2/0-12D-X Copper Lug - Two-Hole, Long Barrel		
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCC2_0-12D-CUST		