
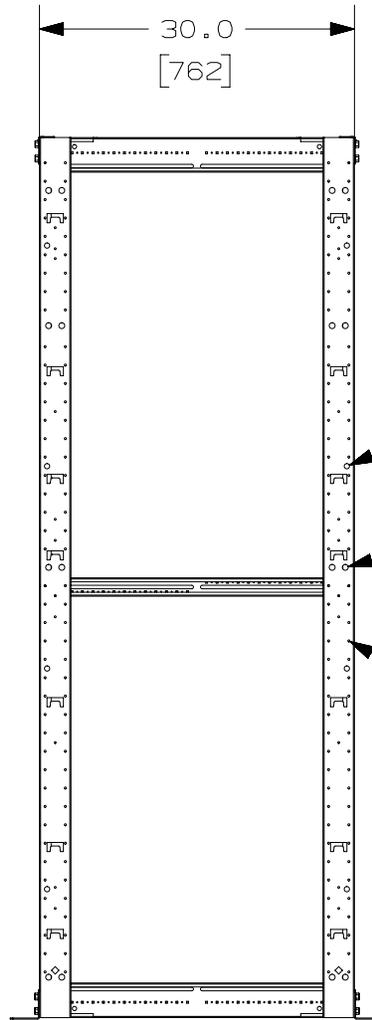


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

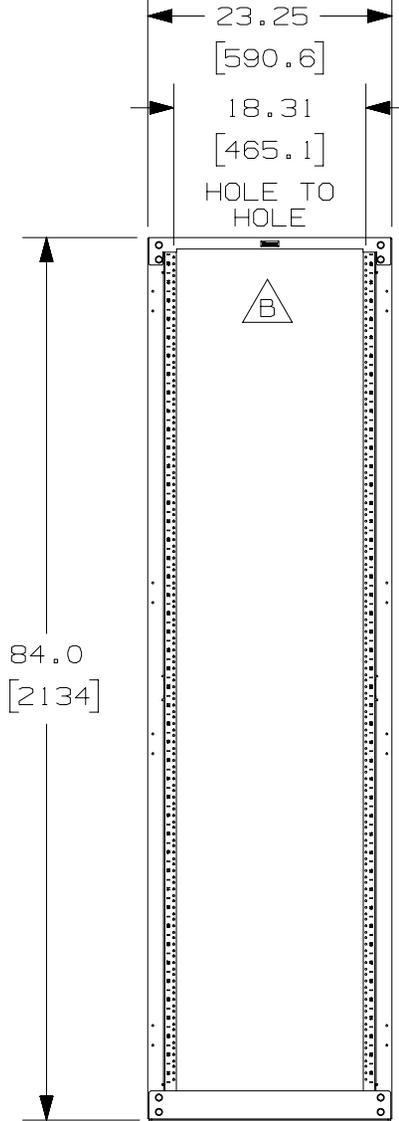


.500 DIA [12.70]
 .560 DIA [14.22]
 .193 DIA [4.90]

PANDUIT P/N	WEIGHT
R4P/R4PWH	105 LBS/EACH 47.6 Kg/EACH
R4PCN/R4PCNWH	96 LBS/EACH 43.5 Kg/EACH

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN PARENTHESIS ARE METRIC.
- INDEPENDENT ADJUSTABLE FRONT & REAR MOUNTING RAILS (EIA) ADJUST FROM 2.75" TO 30" DEPTH.
- CAN BE USED WITH ANY EIA STANDARD COMPONENT IN ADDITION TO ALL PANDUIT HORIZONTAL CABLE MANAGEMENT AND PATCH PANEL PRODUCTS.
- 45 AVAILABLE RACK SPACES.
- EIA UNIVERSAL STANDARD HOLE PROGRESSION ON FRONT CHANNELS AND REAR MOUNT RAILS .625", .625", .500", .625", .625", .500"...ETC.
- ALL RACKS WILL HAVE NUMBERS UP ORIENTATION (RU "01" ON BOTTOM, RU "45" ON TOP). INSTRUCTIONS WILL BE PROVIDED ON HOW TO GET NUMBERS DOWN ORIENTATION.
- RU SPACING NUMBERS ARE CLEARLY PRINTED ON MOUNTING RAILS.
- ALL ASSEMBLY HARDWARE INCLUDED:
 (16) 3/8-16 X 1" BLACK HEX BOLT
 (16) 3/8" PAINT PIERCING GROUNDING WASHER
 (1) TUBE OF ANTI-OXIDIZING PASTE
 (25) 12-24 X .5" SLOTTED PAN HEAD STEEL SCREW
 (25) #12-24 CAGE NUTS (ONLY PROVIDED FOR R4PCN)
- EASY ASSEMBLY, ONE WRENCH NEEDED TO INSTALL BOLTS INTO WELDNUTS IN ALL 8 CORNERS.
- FULLY BONDED STRUCTURE WHEN ASSEMBLED PER INSTRUCTIONS.
- LOAD RATING - 2500 LBS.

TITLE		30" DEEP 4 POST RACK	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		PANDUIT	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.X ± .XX ±		STEEL	
.XXX ± ANGLES ±		DRAWING NUMBER:	
 THIRD ANGLE PROJECTION		V10679AB-DC	
DRAWN BY	DATE	CHK	SCALE
BAME	3-30-09	DSI	NONE
SHT 1 OF 3			SIZE
			A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09A	1-8-18	BAME	JCO	JEFK	REALIGNED HOLES FOR PATCHRUNNER 2	M09000HB
08A	10-20-17	BAME	KRKE	JEFK	ADDED P/N R4PWH AND R4PCNWH	M09000GV

D110100DA/15

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

UP TO A 3/8" DIA. J-HOOK MAY BE MOUNTED FROM THE FRONT OF THE BASE ANGLES

BONUS HOLES ARE FOR MOUNTING PANDUIT ACCESSORIES. SEE NOTE 1.

MOUNTING HOLES FOR OPTIONAL POWER STRIP BRACKET. BRACKETS CAN BE MOUNTED ON ANY OF THE 4 POSTS OR ADJUSTABLE RAILS.

OPTIONAL POST HOLES FOR BRACKET MOUNTING NETRUNNER

MASKED AREA FOR GROUNDING, TOP & BOTTOM OF RACK. 4 PLACES

BASE ANGLES (SEE SHEET 2 FOR MOUNTING POSITIONS)

"J" BOLT MOUNTING HOLES FOR SECURING LADDER RACK PERPENDICULAR AND PARALLEL TO 4 POST RACK.

MOUNTING RAILS (ADJUSTABLE FROM 2.75" TO 30")

CUTOUTS ARE FOR MOUNTING PANDUIT ACCESSORIES SEE NOTE 1.




CROSS BEAMS ARE MARKED EVERY 1/2" FOR MOUNTING RAIL ALIGNMENT

MOUNTING HOLES FOR VERTICAL MANAGERS. DOUBLE HOLES ARE FOR MOUNTING PATCHRUNNER. SINGLE HOLES ARE FOR SIDE MOUNTING NETRUNNER.

RU SPACINGS ARE PRINTED ON MOUNTING RAILS

R4P RAILS HAVE TAPPED HOLES

R4PCN RAILS HAVE CAGE NUT HOLES

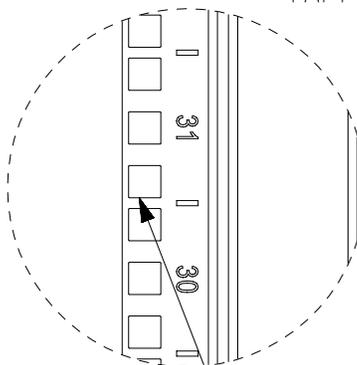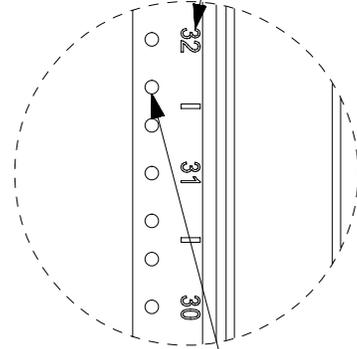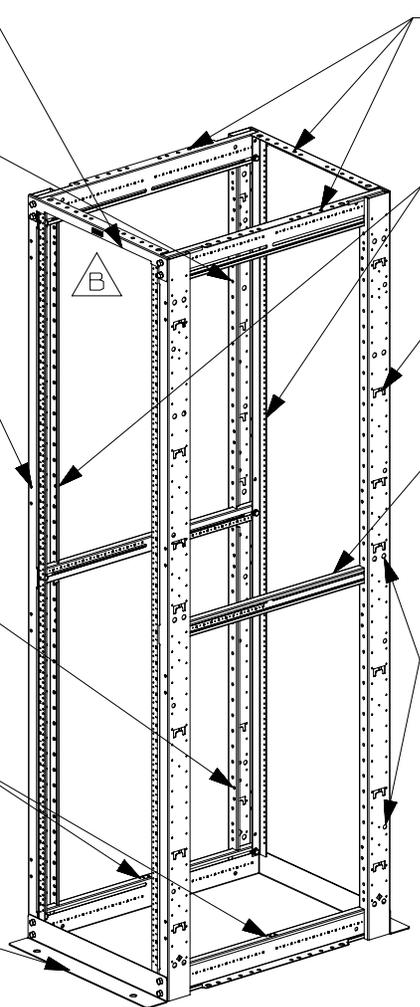

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09A	1-8-18	BAME	JCO	JEFK	SEE SHEET 1 OF 3 FOR REVISIONS	M09000HB
08A	10-20-17	BAME	KRKE	JEFK	SEE SHEET 1 OF 3 FOR REVISIONS	M09000GV

TITLE						30" DEEP 4 POST RACK					
						CUSTOMER DRAWING					
ITEM REVISION NAME						V10679AB/09					
DATASET FILE NAME						V10679AB_DC/09A					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)						PANDUIT MATERIAL: STEEL					
.X ±											
.XX ±						ANGLES ±					
						THIRD ANGLE PROJECTION					
DRAWN BY		DATE		CHK		SCALE		DRAWING NUMBER:		SIZE	
BAME		3-30-09		DSI		NONE		V10679AB-DC		A	
						SHT 3 OF 3					

D110100DA/15