



PANDUIT P/N	WEIGHT
P06B37M	2.3kg

NOTES:


- IDENTIFICATION:
 - UNIT TYPE: BASIC
 - ORIENTATION: HORIZONTAL, 1U
 - OUTLET QTY&TYPE: (6) C19
 - BREAKER QTY&TYPE: N/A
 - INPUT VOLTAGE: 200-240/346-415VAC, WYE
 - INPUT CURRENT: 16A
 - INPUT PHASE: THREE-PHASE, WYE
 - RATED POWER: 11.0kVA
 - INPUT PLUG: IEC 60309 3P+N+E 6H 16A
 - INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
 - POCKET GUIDE
 - QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
 - QTY: (4) M6 CAGED NUT
 - QTY: (2) BUTTONS
 - QTY: (2) M4 FINE THREAD SCREWS
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 11.0 kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

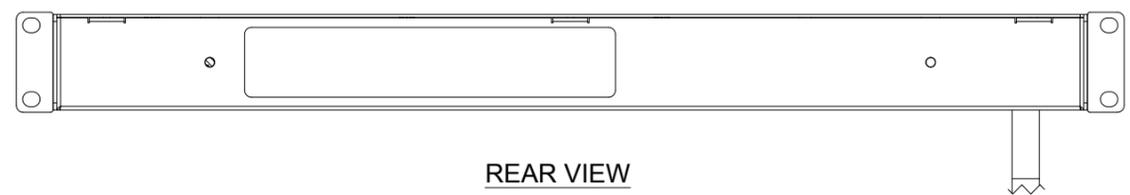


REAR VIEW

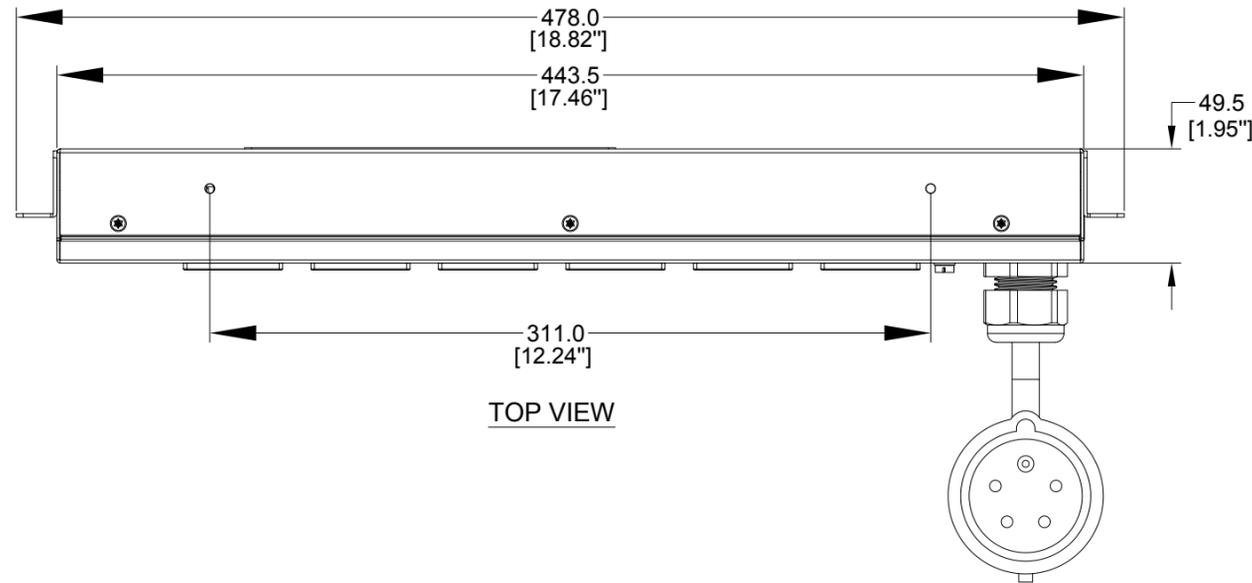


TOP VIEW

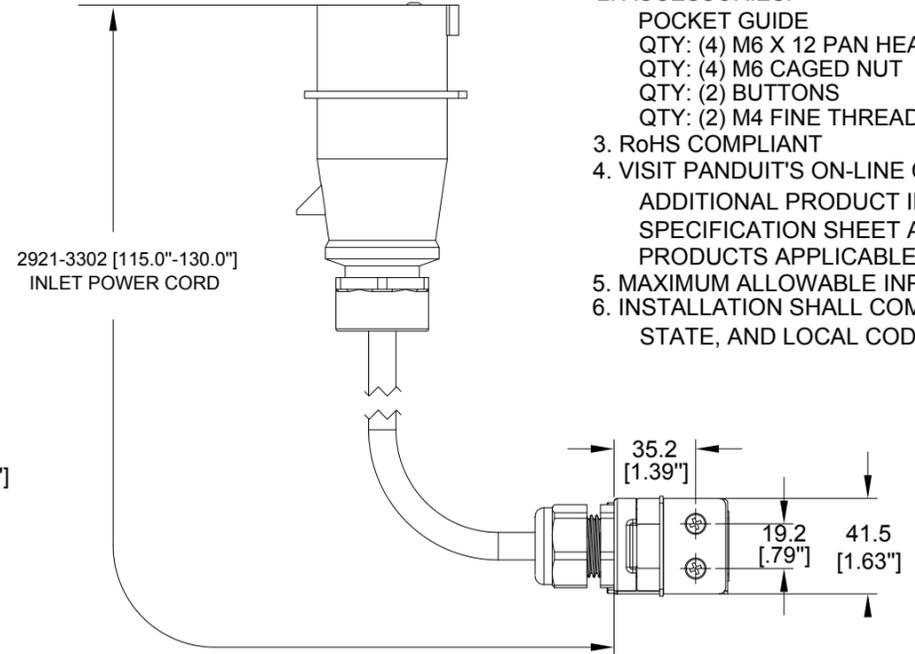

SIDE VIEW

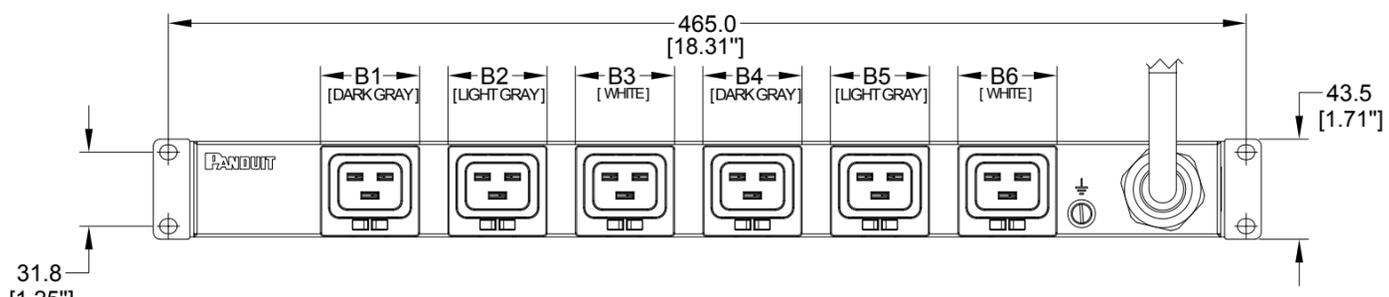

FRONT VIEW



PLUG
16 AMP, 230/ 440V x 3~ WYE
4P/5W
IEC 60309, SPLASHPROOF IP44
2Q (S); 4R (W); 6H



**SIX (6)
RECEPTACLES**
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	JIANG	MIM	EDM	REVISED TOLERANCES	P06B37M
01A	06/28/2017	JIANG	MIM	EDM	INITIAL RELEASE	P06B37M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE BASIC SERIES PDU P06B37M CUSTOMER DRAWING		
ITEM REVISION NAME		
DATASHEET FILE NAME		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
Tolerance(mm) 0.4<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P06B37M_DC
DRAWN BY: JIANG	DATE: 05/24/2017	SCALE: NONE
CHK: SEAN	SCALE: NONE	SHT 1 OF 1