




16 AMP, SINGLE-POLE ELECTRO MECHANICAL SWITCH / BREAKER(2) PLACES

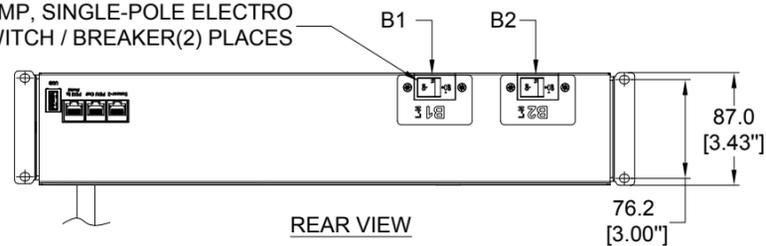


REAR VIEW

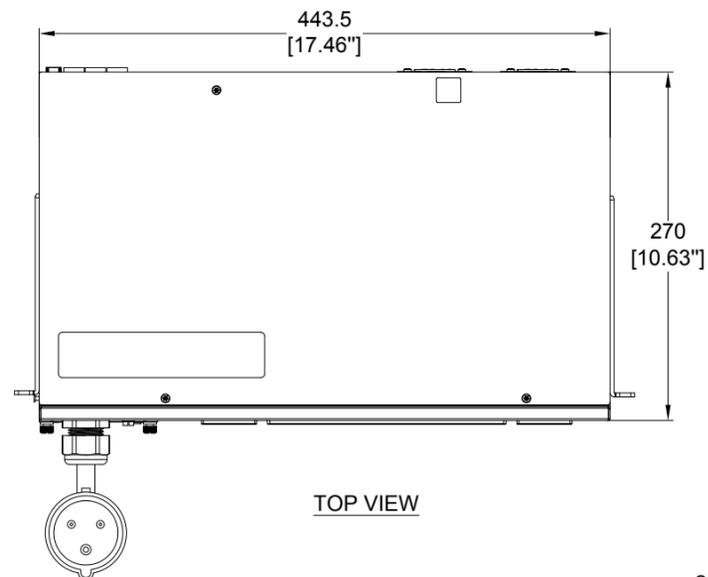

TOP VIEW

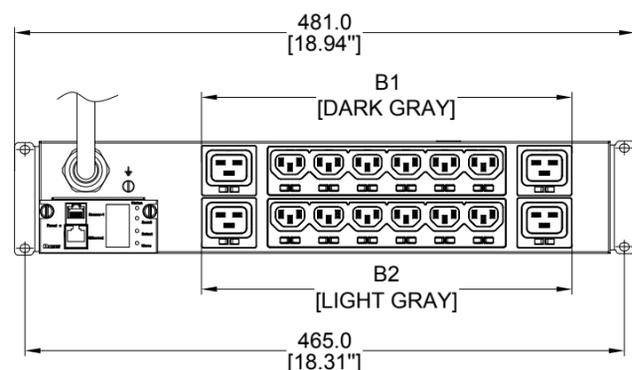

FRONT VIEW

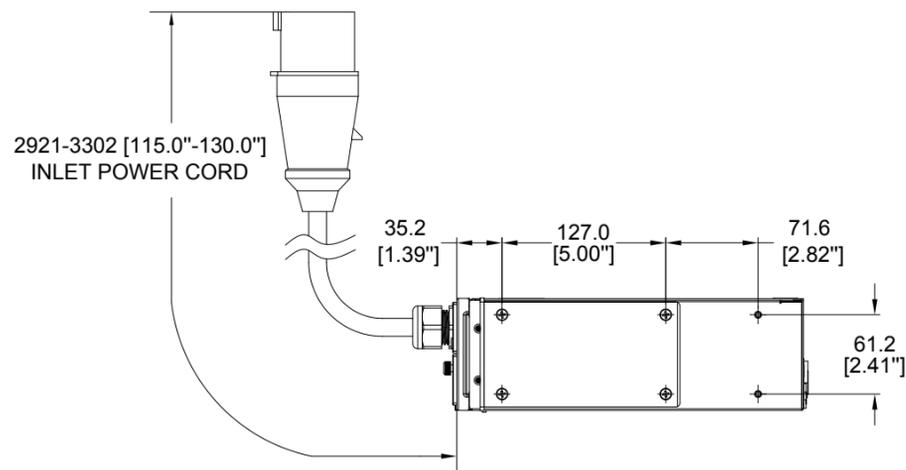

SIDE VIEW

PANDUIT P/N	WEIGHT
P16D37M	7.4kg

NOTES:

- IDENTIFICATION:
 - UNIT TYPE: MONITORED INPUT
 - ORIENTATION: HORIZONTAL, 2U
 - OUTLET QTY&TYPE: (12) C13, (4) C19
 - BREAKER QTY&TYPE: (2) 16AMP, SINGLE-POLE
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 32A
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: 7.4kVA
 - INPUT PLUG: IEC 60309 2P+E 6H 32A
 - INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
 - POCKET GUIDE
 - QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
 - QTY: (4) M6 CAGED NUT
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 7.4kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

PLUG
32 AMP, 250V
2P/3W
IEC 60309, SPLASHPROOF IP44
3J(S); 3U(W), 6H

**FOUR (4)
RECEPTACLES**
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19

**TWELVE (12)
RECEPTACLES**
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	09/21/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P16D37M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN _____
DATE _____
PRINT _____

TITLE: INTELLIGENT SERIES PDU
P16D37M
CUSTOMER DRAWING

ITEM REVISION NAME: _____

DATASHEET FILE NAME: _____

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P16D37M_DA

DRAWN BY: GEORGE | DATE: 09/21/2017 | CHK: SEAN | SCALE: NONE

SHT 1 OF 1 | SCALE: B