
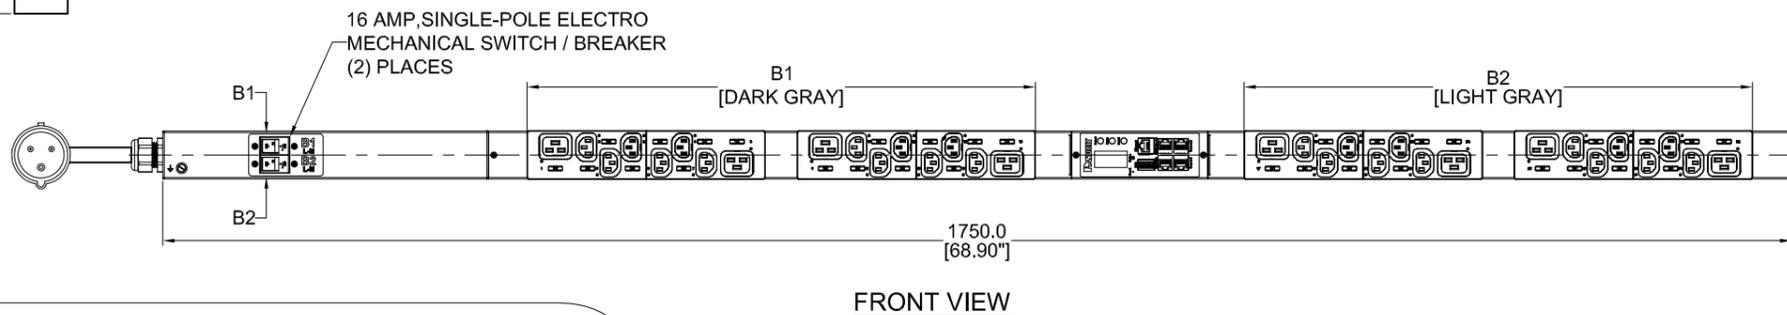
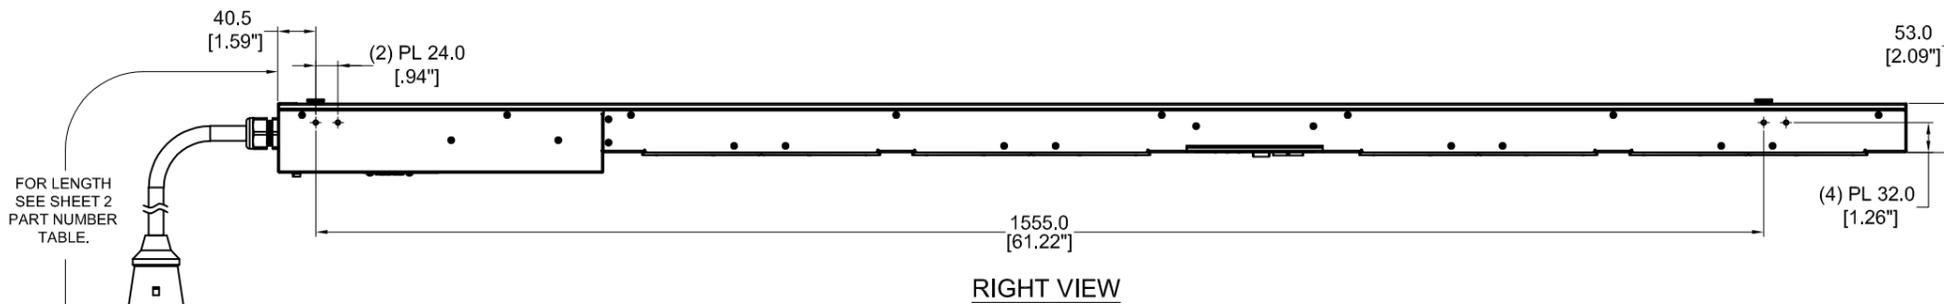
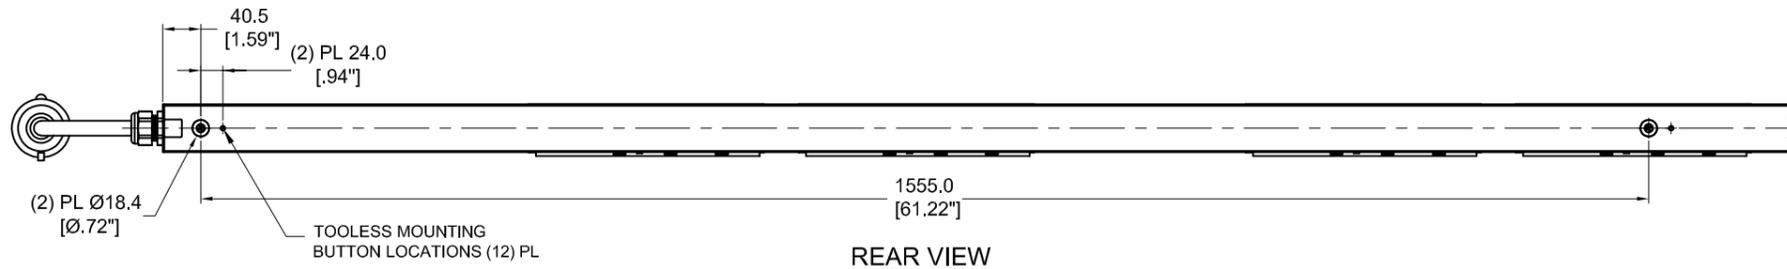


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

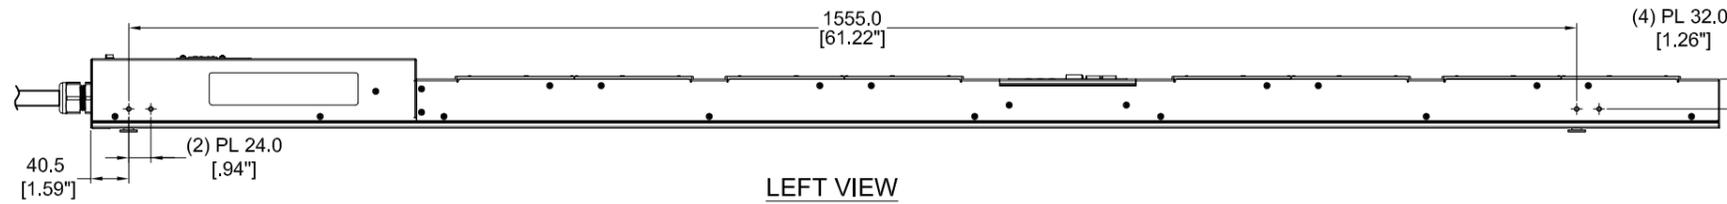

PANDUIT P/N	WEIGHT
P32G13M-XXYZ	SEE SHEET 2

SPECIFICATION:


- STANDARD:
 - UNIT TYPE: MONITORED & SWITCHED PER OUTLET
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (24)C13, (8)C19
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 32A
 - BREAKER QTY & TYPE: (2) 16AMP, SINGLE-POLE SINGLE-PHASE
 - RATED POWER: 7.4 KVA
 - INPUT PLUG: IEC 60309 2P+E 6H 32A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P32G13M-XX Y Z

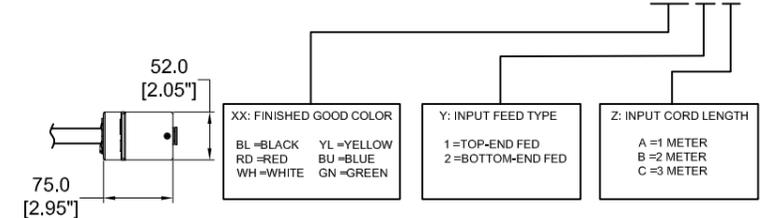

BOTTOM VIEW

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

TITLE		INTELLIGENT SERIES PDU P32G13M-XXYZ CUSTOMER DRAWING	
ITEM REVISION NAME		PANDUIT	
DATASHEET FILE NAME:		MATERIAL/COLOR: N/A	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		DRAWING NUMBER: P32G13M_DC	
THIRD ANGLE PROJECTION		SCALE: SHT 1 OF 2	
DRAWN BY	DATE	CHK	SCALE
WSJ	10/09/2017	SEAN	NONE

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 2P 3W, 6H
IP44 (SPLASHPROOF)
32A, 200 - 250V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	06/07/2018	H.XU	MIM	JAWI	ADDED 'BOTTOM-END FED' CONFIGURABLE PART NUMBER TO SHEET 2 TABLE AND DESCRIPTION. UPDATED IDENTIFICATION TO INCLUDE 'BOTTOM-END FED' IN CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P32G13M
02A	02/24/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P32G13M
01B	12/15/2017	GEORGE	MIM	EDM	UPDATED DESCRIPTION AND ADDED VIEW	P32G13M
01A	10/09/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P32G13M

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P32G13M	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-BL1A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-BL1B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-RD1A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-RD1B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-RD1C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-WH1A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-WH1B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-WH1C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-YL1A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-YL1B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-YL1C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-BU1A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-BU1B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-BU1C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-GN1A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-GN1B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-GN1C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-BL2A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-BL2B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-BL2C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-RD2A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-RD2B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-RD2C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-WH2A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-WH2B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-WH2C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-YL2A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-YL2B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-YL2C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-BU2A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-BU2B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-BU2C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg
P32G13M-GN2A	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	8.3kg
P32G13M-GN2B	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	8.6kg
P32G13M-GN2C	VERTICAL,(24) C13,(8) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	8.9kg

B

B

A

A

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
DATE _____
PRINT _____

TITLE
**INTELLIGENT SERIES PDU
P32G13M-XYZ**
CUSTOMER DRAWING

ITEM REVISION NAME
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
0<450 ±0.5
50<4250 ±1.0
250<4500 ±1.5
500<41000 ±2.5
1000<42000 ±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P32G13M_DC

DRAWN BY DATE CHK SCALE
WSJ 10/09/2017 SEAN NONE

SHT 2 OF 2 SCALE
B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	06/07/2018	H.XU	MIM	JAWI	ADDED 'BOTTOM-END FED' CONFIGURABLE PART NUMBER TO SHEET 2 TABLE AND DESCRIPTION. UPDATED IDENTIFICATION TO INCLUDE 'BOTTOM-END FED' IN CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P32G13M
02A	02/24/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P32G13M
01B	12/15/2017	GEORGE	MIM	EDM	UPDATED DESCRIPTION AND ADDED VIEW	P32G13M
01A	10/09/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P32G13M

2



1