


2


1

PANDUIT P/N	WEIGHT
P08G12M	8.8kg


16 AMP, SINGLE - POLE ELECTRO MECHANICAL SWITCH / BREAKER (2) PLACES

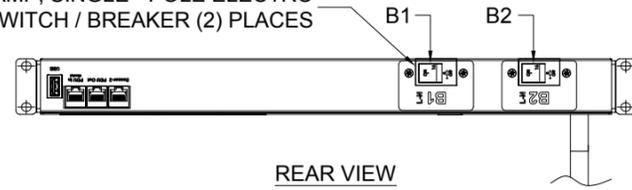


REAR VIEW

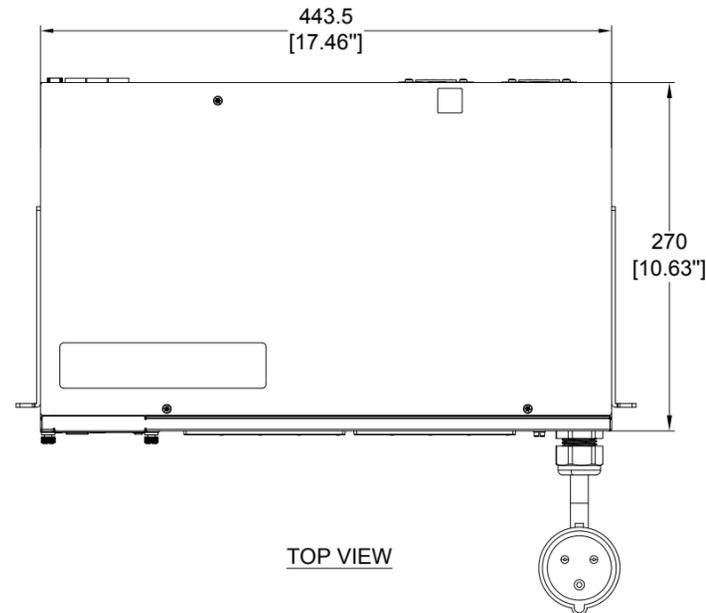

TOP VIEW

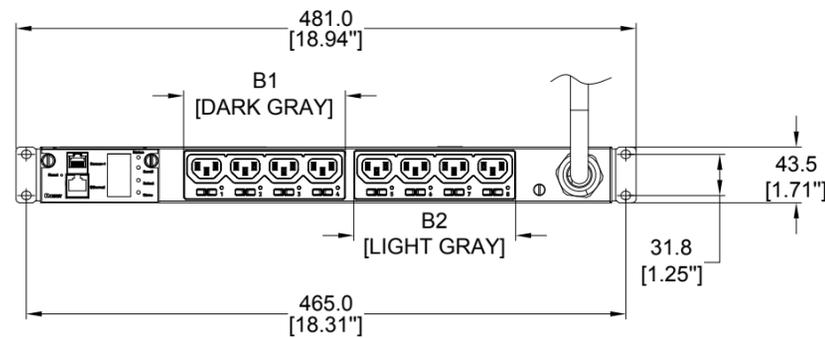

FRONT VIEW

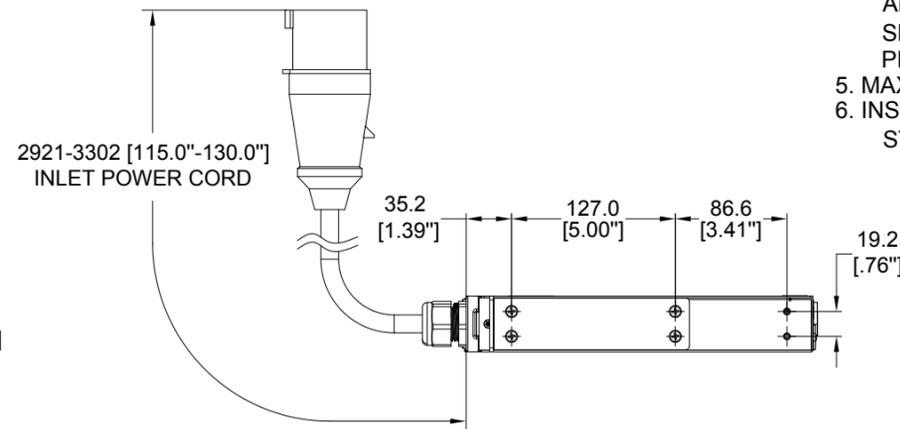

SIDE VIEW

NOTES:

1. IDENTIFICATION:

- UNIT TYPE: MONITORED & SWITCHED PER OUTLET
- ORIENTATION: HORIZONTAL, 1U
- OUTLET QTY&TYPE: (8) C13
- BREAKER QTY&TYPE: (2) 16AMP, SINGLE-POLE
- INPUT VOLTAGE: 200-240VAC
- INPUT CURRENT: 32A
- INPUT PHASE: SINGLE-PHASE
- RATED POWER: 7.4kVA
- INPUT PLUG: IEC 60309 2P+E 6H 32A
- INPUT CORD LENGTH: 3m [10']

2. ACCESSORIES:

- POCKET GUIDE
- QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
- QTY: (4) M6 CAGED NUT

3. RoHS COMPLIANT

4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART

5. MAXIMUM ALLOWABLE INPUT POWER = 7.4 kW


6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

B

B

A

A

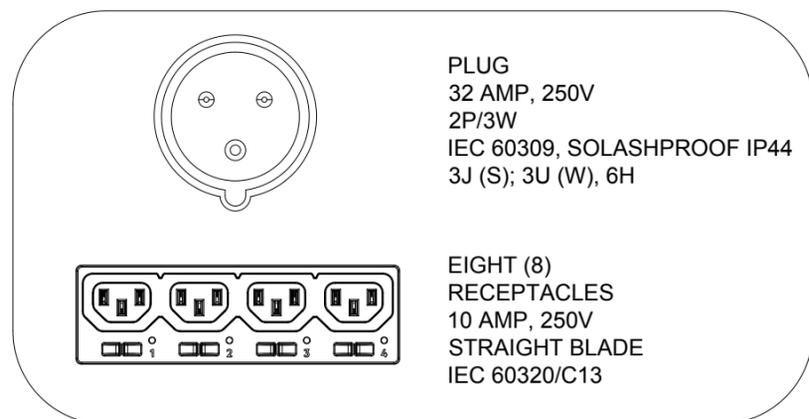

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	09/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P08G12M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P08G12M CUSTOMER DRAWING		
ITEM REVISION NAME:		PANDUIT
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P08G12M_DC
THIRD ANGLE PROJECTION	DRAWN BY: GEORGE	DATE: 09/11/2017
	CHK: SEAN	SCALE: NONE
		SHT 1 OF 1
		SCALE: B

2

1