



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
P24E04M-XXYZ	SEE SHEET 2

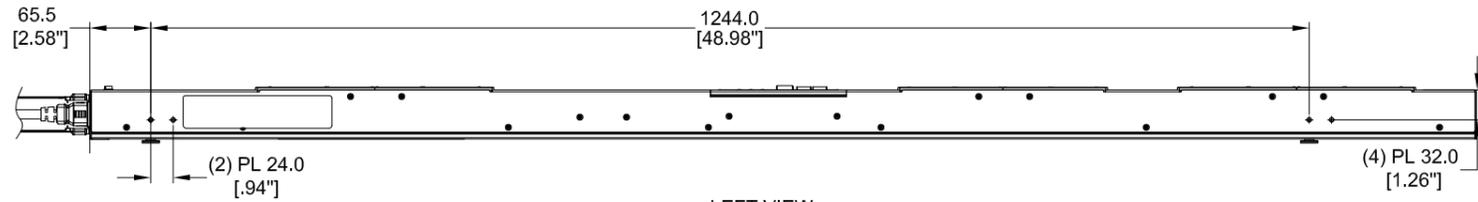

LEFT VIEW

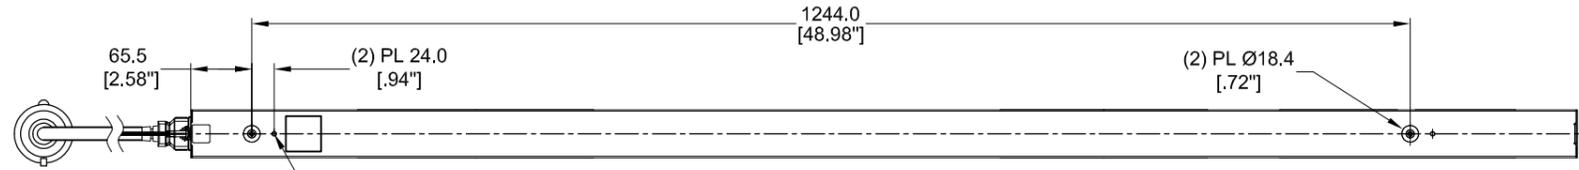


REAR VIEW

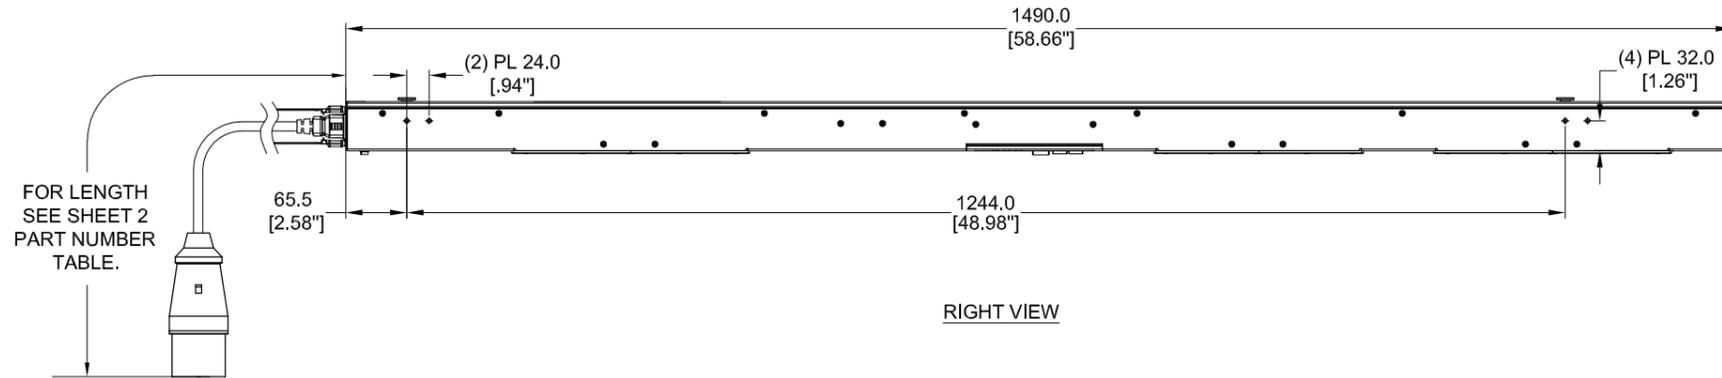


RIGHT VIEW

FOR LENGTH SEE SHEET 2 PART NUMBER TABLE.

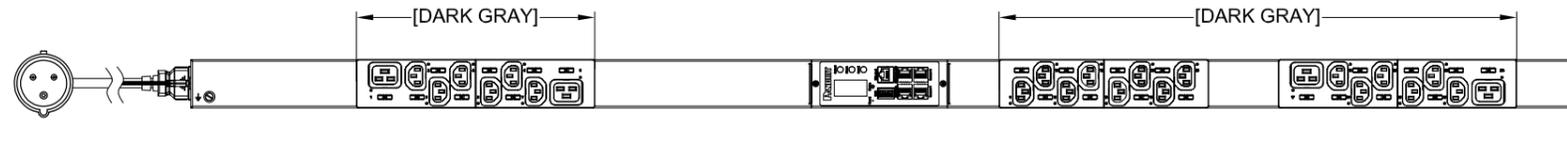

FRONT VIEW



BOTTOM VIEW

SPECIFICATION:

- STANDARD:
 - UNIT TYPE: MONITORED SWITCHED
 - ORIENTATION: VERTICAL, MID
 - OUTLET QTY&TYPE: (20) C13, (4) C19
 - INPUT VOLTAGE: 100-240VAC
 - INPUT CURRENT: 16A
 - BREAKER QTY&TYPE: N/A
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: 3.7kVA
 - INPUT PLUG: IEC 60309 2P+E 6H 16A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION
- SUPPLIED DETACHABLE INPUT CORD DESIGNED TO FEED INTO THE C20 INLET ON THE UNIT
- DETACHABLE INPUT CORD MINIMUM RATING TO BE EQUAL TO OR GREATER THAN THE PDU INPUT CURRENT RATING STATED IN SPECIFICATION #1 ABOVE

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24E04M-XX Y Z

XX: FINISHED GOOD COLOR BL=BLACK YL=YELLOW RD=RED BU=BLUE WH=WHITE GN=GREEN	Y: INPUT FEED TYPE 1=TOP-END FED 2=BOTTOM-END FED	Z: INPUT CORD LENGTH A=1 METER B=2 METER C=3 METER
--	---	---

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

TITLE INTELLIGENT SERIES PDU P24E04M-XXYZ CUSTOMER DRAWING		SIGN	
ITEM REVISION NAME:		DATE	
DATASHEET FILE NAME:		PRINT	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P24E04M_DC	
THIRD ANGLE PROJECTION	DRAWN BY: GEORGE	DATE: 06/27/2017	SCALE: NONE
	CHK: SEAN		SHT 1 OF 2
			SCALE: B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER ADDED NOTE #6 AND #7 REFERENCING DE-ATTACHABLE INPUT CORD	P24E04M
01A	07/13/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24E04M

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 2P 3W, 6H
IP44 (SPASHPROOF)
16A, 250V MAX RATED INPUT

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24E04M	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-BL1A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-BL1B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-RD1A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-RD1B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-RD1C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-WH1A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-WH1B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-WH1C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-YL1A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-YL1B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-YL1C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-BU1A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-BU1B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-BU1C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-GN1A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-GN1B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-GN1C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-BL2A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-BL2B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-BL2C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-RD2A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-RD2B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-RD2C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-WH2A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-WH2B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-WH2C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-YL2A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-YL2B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-YL2C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-BU2A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-BU2B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-BU2C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg
P24E04M-GN2A	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"]	6.4kg
P24E04M-GN2B	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5'[+7"/-3.5"]	6.6kg
P24E04M-GN2C	VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10'[+10"/-5"]	6.8kg

B

B

A

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER ADDED NOTE #6 AND #7 REFERENCING DE-ATTACHABLE INPUT CORD	P24E04M
01A	07/13/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24E04M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P24E04M-XYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
 THIRD ANGLE PROJECTION		DRAWING NUMBER: P24E04M_DC
DRAWN BY	DATE	SCALE
GEORGE	06/27/2017	NONE
CHK	SCALE	SHT 2 OF 2
SEAN	NONE	B

2



1