


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR	DIMENSIONS in. [mm]	
				L ± .03 [0,8]	MAX WIRE INSULATION DIA.
EDV10-250M	#12-10 [4,0-6,0]	.250 X .032 [6,3 X 0,8]	YELLOW	.98 [24,9]	.235 [5,97]

NOTES:

1. USED FOR:
 - A. STRANDED COPPER WIRE ONLY
 - B. 194°F (90°C) MAX TEMP RATING
 - C. 600V MAX VOLTAGE
2. MATERIAL:
 - A. STAMPING: .032" (0.81) THK COPPER, NICKEL PLATED
 - B. HOUSING: VINYL
3. INSTALLATION TOOLS: CT-100A, CT-260, CT-550
4. WIRE STRIP LENGTH $9/32'' \begin{matrix} +1/32 \\ -0 \end{matrix}$ [7,1mm $\begin{matrix} +0.8 \\ -0 \end{matrix}$]
5. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

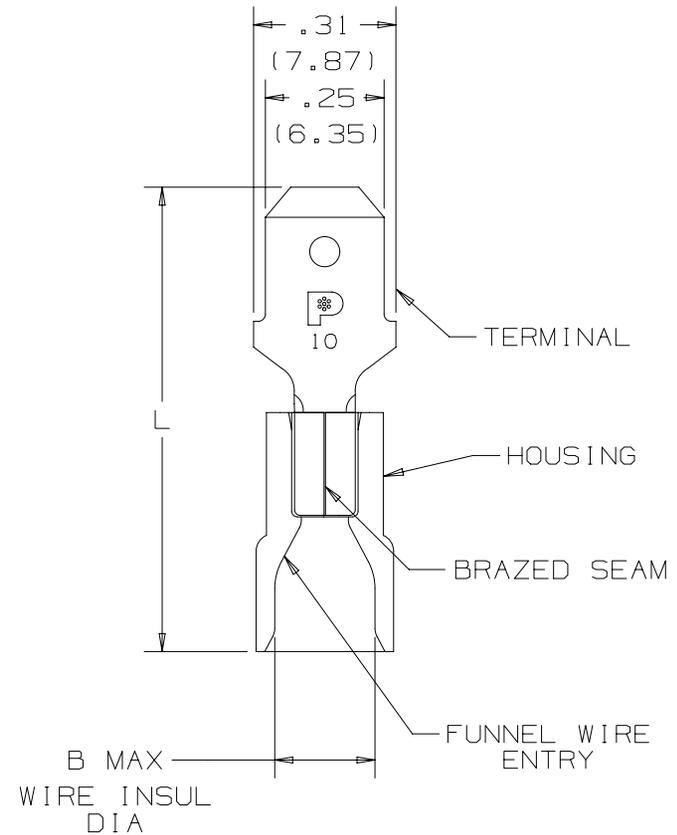

TITLE STRONGHOLD MALE DISCONNECT (250 SERIES) VINYL INSULATED, BRAZED SEAM #12-10 AWG					
CUSTOMER DRAWING					
ITEM REVISION NAME			00123STK/00		
DATASET FILE NAME			00123STK/00		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					MATERIAL: SEE NOTES
.x ± .1 [2.54]		.xxx ± .005 [.127]			
.xx ± .01 [.25]		ANGLES ± 5°			
DRAWN BY JHNU			DATE 2/18		DRAWING NUMBER: SH41195
CHK TMR			SCALE NTS		SHT 1 OF 1
DESCRIPTION			ECN		SIZE A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

D10100DA/20