
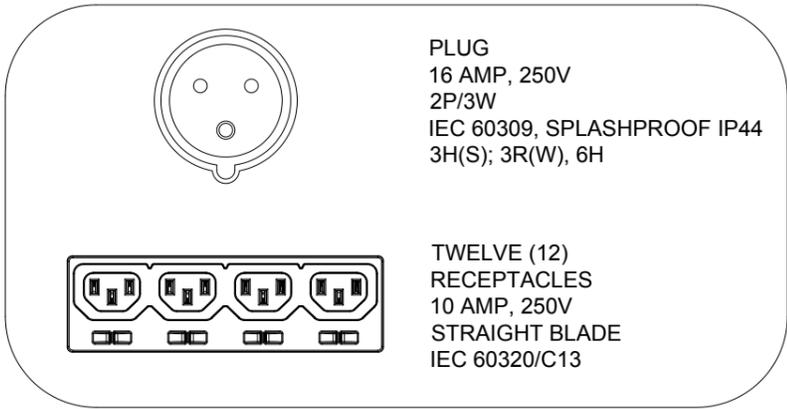
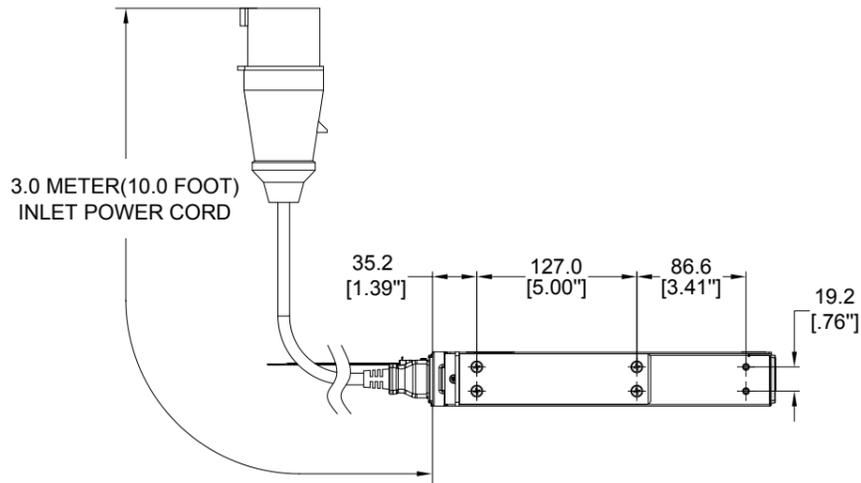
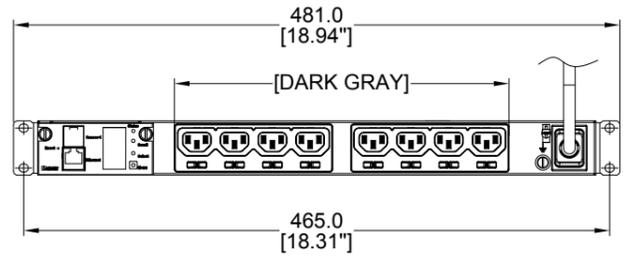
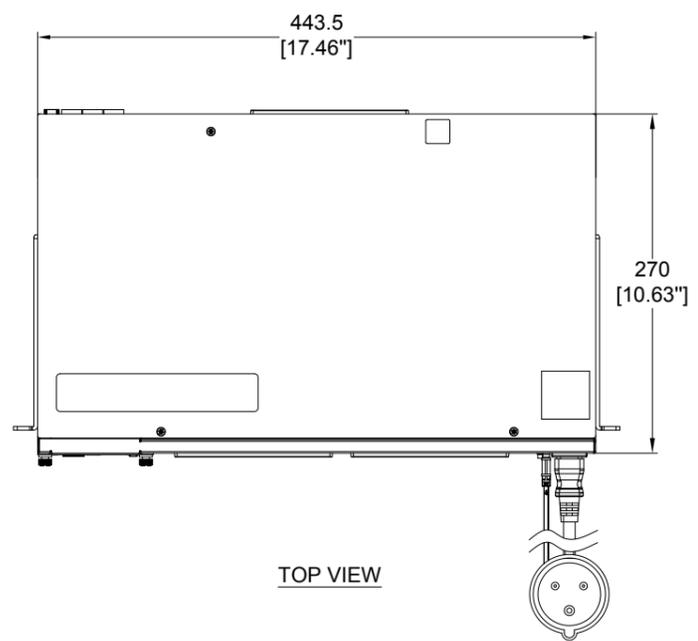


PANDUIT P/N	WEIGHT
P12D36M	3.9kg

NOTES:

- IDENTIFICATION:

UNIT TYPE:	MONITORED INPUT
ORIENTATION:	HORIZONTAL, 1U
OUTLET QTY&TYPE:	(12) C13
BREAKER QTY&TYPE:	N/A
INPUT VOLTAGE:	100-240VAC
INPUT CURRENT:	16A
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	3.7kVA
INPUT PLUG:	IEC 60309 2P+E 6H 16A
INPUT CORD LENGTH:	3m [10']
- ACCESSORIES:
 - POCKET GUIDE
 - QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
 - QTY: (4) M6 CAGED NUT
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 3.7 kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

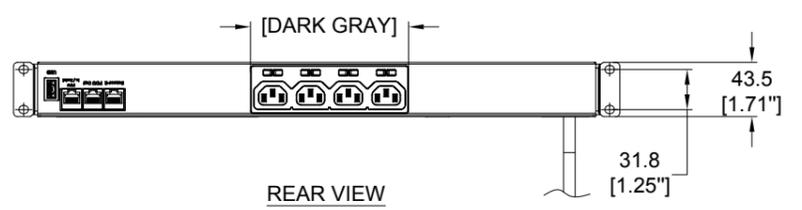

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	07/13/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P12D36M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P12D36M CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
Tolerance(mm) 0-1<200 ±0.5 200-1<500 ±1.5 500-1<1000 ±2.5 1000-1<2000 ±4.0		N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P12D36M_DC
DRAWN BY GEORGE	DATE 06/27/2017	SCALE NONE
SHT 1 OF 1		SCALE B