



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

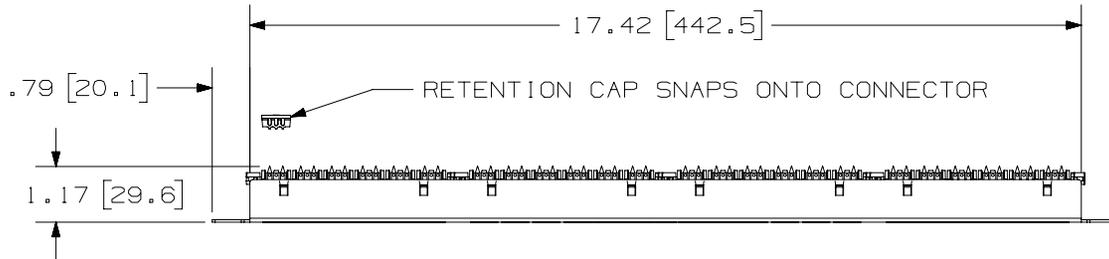

A

PANDUIT PART NO.	WEIGHT (APPROX.)
DP246X88TGY	1.25 lb (567 g)
DP246X88TGWH	1.25 lb (567 g)

- NOTES:
- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
 - MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
 - 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
 - THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
 - FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
 - DIMENSIONS IN [] ARE IN METRIC.
 - USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
 - RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

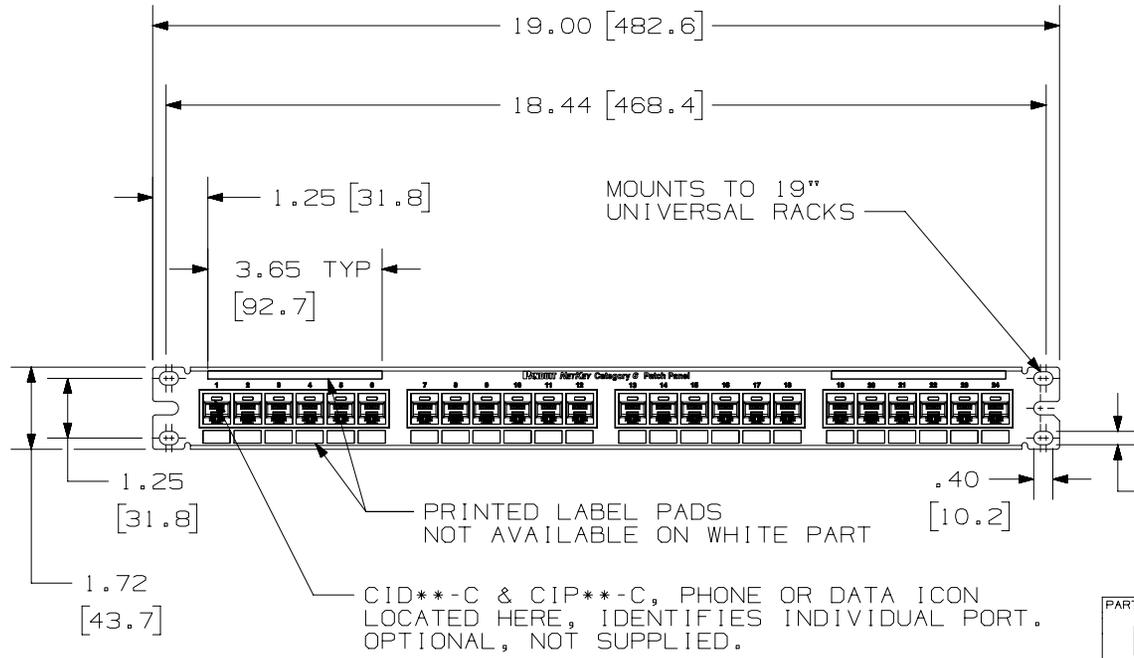

B

PRINTED LABEL PADS NOT AVAILABLE ON WHITE PART

CID**-C & CIP**-C, PHONE OR DATA ICON LOCATED HERE, IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

PART NUMBER		DP246X88TGY ; DP246X88TGWH	
TITLE			
DP6A 10GIG 24 PORT PATCH PANEL			
CUSTOMER DRAWING			
ITEM REVISION NAME		M02479JB/01	
DATASET FILE NAME		M02479JB_DC238/01A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .xxx ± .010 [.3]		DRAWING NUMBER: 02479-238	
.xx ± .03 [.8] ANGLES ±			
		THIRD ANGLE PROJECTION	
DRAWN BY	DATE	CHK	SCALE
LZ	3-4-06	CEF	NONE
SHT 1 OF 1			SIZE A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
3	9-27-18	BAME	KRKE	MMR	A. ADDED P/N DP246X88TGWH; B. REMOVED M6 SCREWS	M09000HW
2	6/18/14	JSP	REFR	MMR	REVISED AND REDRAWN, PREVIOUS REVISIONS HAVE BEEN OMITTED.	02479-238

D10100DA/14