


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

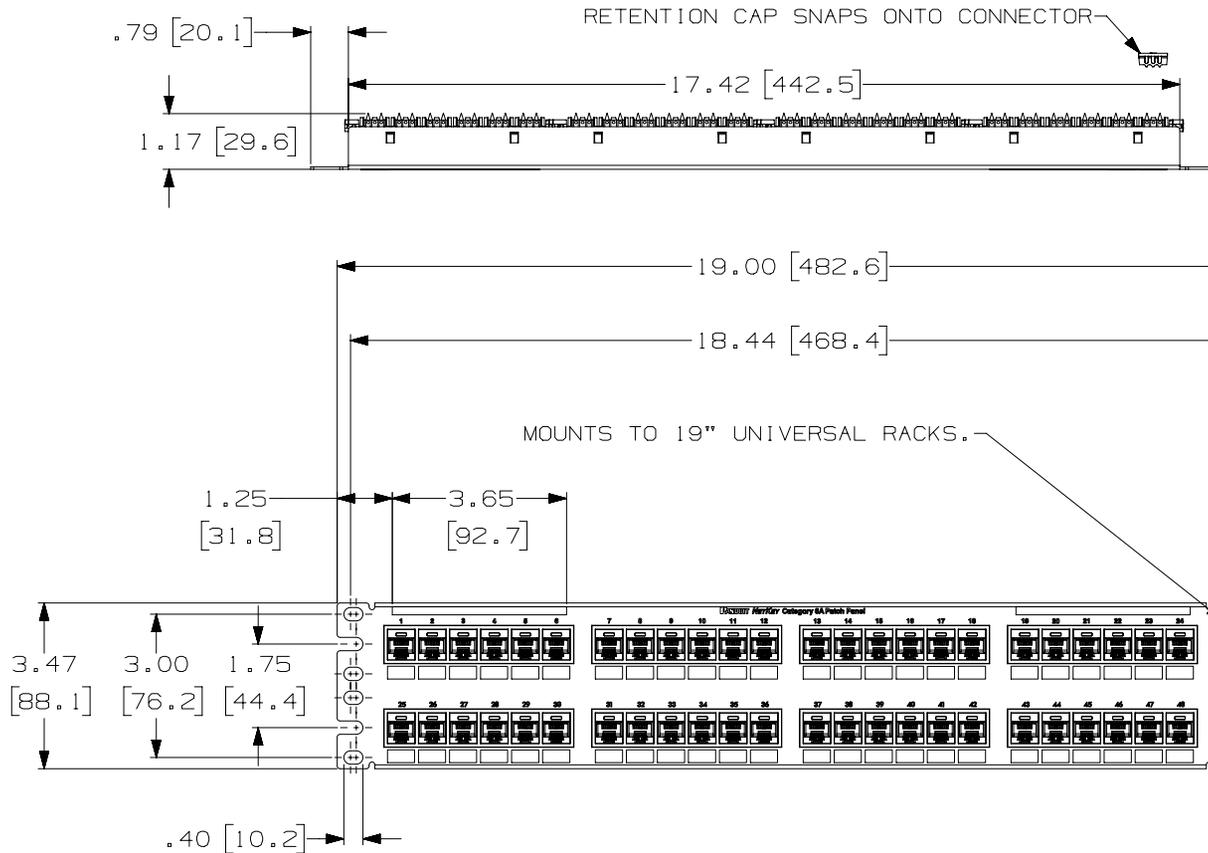

PANDUIT PART NO.	WEIGHT (APPOX.)
NK6XPPG48Y	2.2 lb (997.9 g)

NOTES:

- MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

PART NUMBER		SEE CHART	
TITLE			
NETKEY CAT6A 48 PORT PATCH PANEL			
CUSTOMER DRAWING			
ITEM REVISION NAME		M02479RQ/01	
DATASET FILE NAME		M02479RQ_DC423/01A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.x ± .xxx ± .010 (.3)		SEE NOTE 1	
.xx ± .03 (.8) ANGLES ±		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		02479-423	
DRAWN BY	DATE	CHK	SCALE
BJN	2-4-15	BJN	.25 TO 1
SHT 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	9-27-18	BAME	KRKE	MMR	A. REMOVED M6 SCREWS	M09000HW
R	2-4-15	BJN	MDJR	LPH	RELEASED TO PRODUCTION	02479-423

D10100DA/14

2

1

2

1