
PLC Splitters for Passive Optical Networks



technical information

The planar-lightwave-circuit optical splitters shall be in a discrete form factor for use in wall-mounted PON enclosures. The PLC splitters shall be available in 1X4, 1X8, 1X16, and 1X32 configurations, with an option for either bare-fiber or pre-connectorized with SC-APC pre-polished connectors. The splitters shall be optimized for low input polarization sensitivity.

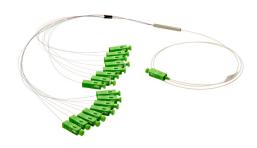

application

For use in passive optical networks to split a single fiber signal into 4, 8, 16, or 32 channels that enable optical network terminal installation at the access or edge layer of the network.

specifications

3 p c c i i i c a t i c ii s				
Split Ratio	1X4	1X8	1X16	1X32
Operating Wavelength	1260-1650nm			
Insertion Loss	7.5dB	11.0dB	14.2dB	17.8dB
IL Uniformity	1.0dB	1.0dB	1.5dB	2.0dB
Polarization Dependency	0.3dB	0.3dB	0.4dB	0.45dB
Directivity	> 55dB			
Return Loss	> 55dB			
Max. Optical Power	300 mw			
Operating Temp. Range	-40°C to 85°C			
Storage Temp. Range	-40°C to 85°C			
Storage Relative Humidity	20-90 (%RH)			

^{*} Note: Values do not include connector loss.

PLC Splitters for Passive Optical Networks

part number

Example: FPONCS1X32 - Fiber Optic PLC Splitter, 1X32 Ratio, with 1 SC-APC to 32 SC-APC Connectors.

Character 1
Example F

2 P 3 O 4 N 5 C

6 S

7

8 X 9 &10 32

1 - F = Fiber

2, 3, 4 - PON = Passive Optical Network

5 – C = Connectorized

S = Splice-Ready

6 - S = Splitter


7, 8, 9, 10 – 1X4 = 1 to 4 Split Ratio

1X8 = 1 to 8 Split Ratio

1X16 = 1 to 16 Split Ratio

1X32 = 1 to 32 Split Ratio

^{*} Note: Connectorized splitters will have SC-APC Connectors on both the input and output ends.

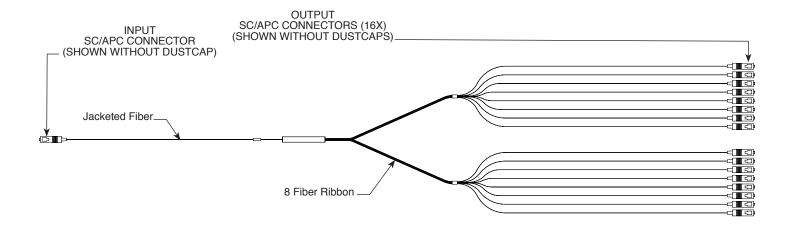

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com

or by phone: 800.777.3300

© 2020 Panduit Corp. ALL RIGHTS RESERVED. Printed in the U.S.A. FBDS28--WW-ENG 3/2020