


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE SIZE AWG [mm <sup>2</sup> ]		HOUSING COLOR	COLOR RING STEP-DOWN END	DIMENSIONS in. [mm]				WIRE STRIP LENGTH in [mm] +1/32 [0,8] -0	TOOLS	TOOL POCKET
	STANDARD END	STEP-DOWN END			L ± .04 [1.1]	C ± .01 [0.3]	D ± .01 [0.3]	B			
ESV14-ESV18	#16-14 [1,5-2,5]	#22-18 [0,5-0,75]	BLUE	RED	.96 [24.5]	.09 [2.3]	.07 [1.7]	.165 [4.2]	9/32 [6,8]	KST2000A	BLUE #16-14
ESV10-ESV18	#12-10 [4,0-6,0]	#22-18 [0,5-0,75]	YELLOW	RED	1.22 [31.0]	.13 [3.4]	.07 [1.7]	.236 [6.0]			YELLOW #12-10
ESV10-ESV14	#12-10 [4,0-6,0]	#16-14 [1,5-2,5]	YELLOW	BLUE	1.22 [31.0]	.13 [3.4]	.09 [2.3]	.236 [6.0]			YELLOW #12-10
ESV8-ESV14*	#8 [8,0]	#16-14 [1,5-2,5]	RED	BLUE	1.41 [35.7]	.18 [4.5]	.09 [2.3]	.322 [8.2]	3/8 [9,6]	KST-HDC38A	#8 [8,0]
ESV8-ESV10*	#8 [8,0]	#12-10 [4,0-6,0]	RED	YELLOW	1.41 [35.7]	.18 [4.5]	.13 [3.4]	.322 [8.2]			#8 [8,0]
ESV6-ESV8	#6 [14,0]	#8 [8,0]	BLUE	RED	1.77 [45.0]	.23 [5.9]	.18 [4.5]	.401 [10.2]	15/32 [12,0]		#6 [14,0]

\*NOT UL LISTED

NOTES:

- USED FOR:
  - A. STRANDED COPPER WIRE ONLY
  - B. 167°F [75°C] MAX. OPERATING TEMPERATURE
  - C. 600V MAX VOLTAGE RATING
- MATERIAL:
  - A. STAMPING: COPPER TUBE, TIN PLATED
  - B. HOUSING: VINYL
- SEE WWW.PANDUIT FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

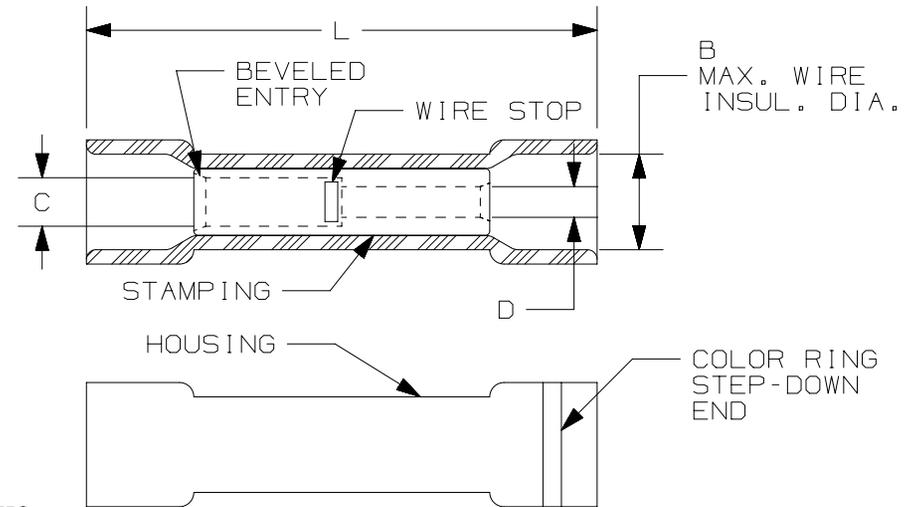

LISTED  
2000  
E52164

TITLE <b>STRONGHOLD STEP-DOWN BUTT SPLICES VINYL INSULATED, #22-6 AWG</b>					
CUSTOMER DRAWING					
ITEM REVISION NAME 00123SSD/00		<b>PANDUIT</b>			
DATASET FILE NAME 00123SSD_DC/00					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			MATERIAL:  SEE NOTES		
.x ± .1 [2.54]      .xxx ± .005 [0.127] .xx ± .01 [0.25]      ANGLES ± 5°			DRAWING NUMBER: 00123SSD-DC		
DRAWN BY JHNU		DATE -	CHK -	SCALE N.T.S.	SHT 1 OF 1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	DRAWING RELEASED	00123SS

D10100DA/15