
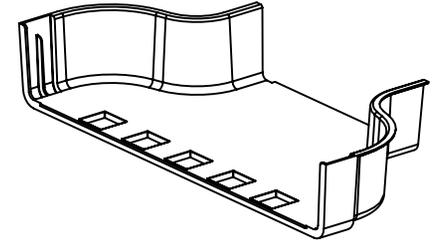
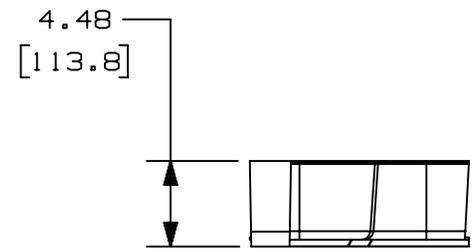
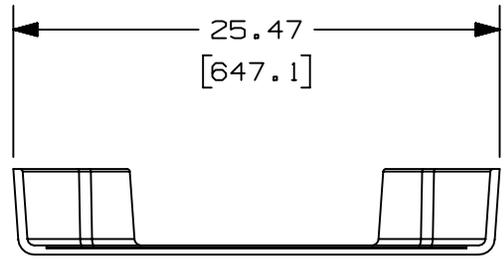


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WEIGHT	MATERIAL
FRRF2412	2.09 LB/EACH (948g/EACH)	ABS
FRRF2412L	2.09 LB/EACH (948g/EACH)	PC/ABS

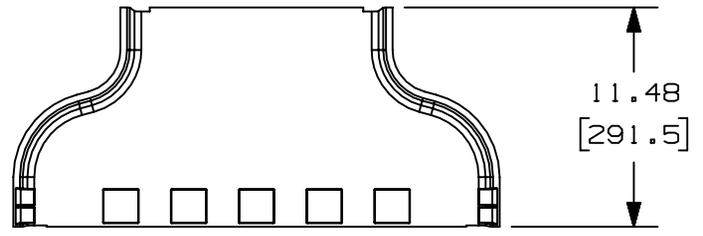

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBERRUNNER 24x4 TO FIBERRUNNER 12x4 REDUCER IS DESIGNED WITH A MINIMUM 3" (76.2) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.



A

A

D10.100DA/20

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00B	8/28/2020	MES	DWR	DWR	UPDATED TITLEBLOCK, ADDED PART NUMBER	V09002DZ/11

TITLE		FIBERRUNNER 24x4 TO FIBERRUNNER 12x4 REDUCER (FRRF2412, FRRF2412L)	
		CUSTOMER DRAWING	
ITEM REVISION NAME		D39701CM/00	
DATASET FILE NAME		D39701CM_DC/00B FRR2412	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		(.X) ± .03 (.8)      (.XXX) ± .005 (0.125) (.XX) ± .03 (.8)      ANGLES ± .5°	
DRAWING NUMBER:		39701-21	
DRAWN BY	DATE	CHK	SCALE
MSO	10-21-08	SL	NONE
SHT 1 OF 1		A	

2

1