
| THIS COPY IS PROVIDED ON A RESTRIC | CTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP. |
|------------------------------------|---|
|------------------------------------|---|

| Material   | High Conductivity<br>Seamless Copper Tube  |  |  |  |  |
|--|--|--|--|--|--|
| Plating  | Electro-Tin  |  |  |  |  |
| Wire Size  | 8 AWG  |  |  |  |  |
| Wire Type  | Stranded Copper; Class B:<br>Compact, Compressed or<br>Concentric, Class C: Concentric   |  |  |  |  |
| Wire Strip Length                                    | 3/4 in.  |  |  |  |  |
| Stud Size  | #10  |  |  |  |  |
| UL Listed Wire<br>Connector                          | Yes, for applications up to 35kv.<br>Consult cable manufacturer for<br>voltage stress relief instructions<br>with applications greater than<br>2000 volts. |  |  |  |  |
| UL Temperature<br>Rating                             | 90° C  |  |  |  |  |
| C.S.A Certified<br>Wire Connector                    | Yes  |  |  |  |  |
| Panduit Color Code<br>on Barrel                      | RED  |  |  |  |  |
| Panduit Die Index No.<br>on Barrel                   | P21  |  |  |  |  |
| Alternate Industry<br>Die Index No. ( )<br>on Barrel | N/A  |  |  |  |  |

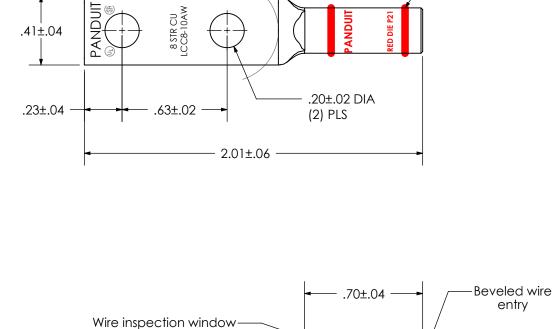

.31 R Ref

- Color coded barrel markings

.18±.01

.27±.01





|     |      |      |      |                     |                         |     |     | CORP. TINLEY PARK, ILLINOIS                     |
|-----|------|------|------|---------------------|-------------------------|-----|-----|---|
|     |      |      |      |                     |                         |     |     | LCC8-10AW-L                                     |
| 01  | 8/12 | JHNU | JHNU | REMOVED NAVY NUMBER | N10883RZ-LCC8-10AW-CUST | RGB | RGB | Copper Lug - Two-Hole, Long Barrel with Window  |
| REV | DATE | BY   | СНК  | DESCRIPTION         | ECN                     | -R  | SUP | SCALE N/A DRAWING NO / CAD FILE I CC8-10AW-CUST |

.08±.01