



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WEIGHT lbs. / 100 Pcs. [g / 100 Pcs.]	CABLE TIE CROSS SECTION COMPATABILITY
ABM3H-AV	0.61 [274]	MINIATURE INTERMEDIATE STANDARD LIGHT-HEAVY HEAVY





NOTES:

1. SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR.
2. MOUNTS ARE SUPPLIED IN STRIPS OF TWO.
3. MOUNT HAS A CONTINUOUS OPERATING TEMPERATURE OF 185°F (85°C).
4. DIMENSIONS IN BRACKETS ARE METRIC [mm]
5. NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
7. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: ±0.030 [0.76]

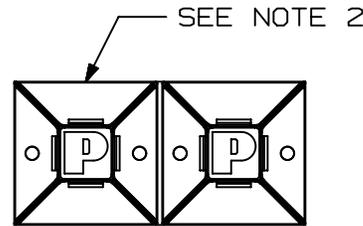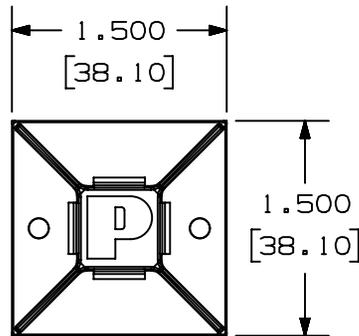

TO APPLY MOUNTS:

PRELIMINARY: CLEAN SURFACE WITH A CLEAN CLOTH AND ISOPROPYL ALCOHOL. ALLOW SURFACE TO AIR DRY.
 STEP 1: SCORE WITH UTILITY KNIFE BETWEEN MOUNT PAIRS TO BREAK WELD BACK.
 STEP 2: REMOVE MOUNT FROM PROTECTIVE LINER.
 STEP 3: PLACE IN DESIRED LOCATION.
 STEP 4: APPLY PRESSURE TO TOP SURFACE OF MOUNT.
 (IT IS RECOMMENDED THAT HIGH BOND ADHESIVE MOUNTS DWELL FOR 8 HOURS AFTER INSTALLATION, PRIOR TO LOADING)

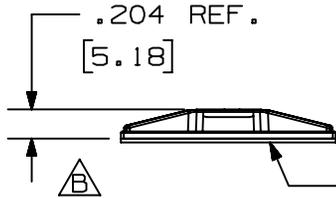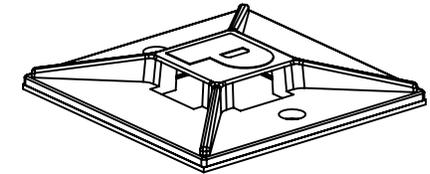

ADHESIVE BACKING:
 PRESSURE SENSITIVE FOAM TAPE 0.025 [0.6mm] THICK WITH PROTECTIVE LINER. MOUNT IS DESIGNED TO SUPPORT 2.25 lbs. [1021 g] MAX. WEIGHT ON A CLEAN, DRY, SMOOTH, GREASE-FREE SURFACE.

PART NUMBER		ABM3H-AV		
TITLE		VHB ADHESIVE BACKED MOUNTS		
CUSTOMER DRAWING				
ITEM REVISION NAME		00202BBF/00		
DATASET FILE NAME		00202BBF_DC_ABM3H-AV/00C		
MATERIAL		NYLON 6/6		
DRAWING NUMBER		00202BBF - DC		
DRAWN BY	DATE	CHK	SCALE	SIZE
BDK	10.09.20	DAEI	NTS	A
SHEET 1 OF 1				

00C	05.06.21	BDK	MRJS	JADE	F: TEMPERATURE WAS 158°F (70°C)	101264
00B	03.15.21	BDK	MRJS	JADE	A: REVISED APPLICATION STEPS B: CHANGED DIMENSION ORIGIN C: CORRECTED SUPPORT WEIGHT; TAPE THICKNESS WAS 0.027 [0.69] D: TEMPERATURE WAS 120°F (49°C) E: MINIATURE WAS MEDIUM	098736
00	10.09.20	BDK	DAEI	MBVE	RELEASED TO PRODUCTION	GAECN081503
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

A-SIZE CUSTOMER