


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR	DIMENSIONS in. [mm]		
				L ± .03 [0,8]	B ± .01 [0,3]	MAX WIRE INSULATION DIA.
EDV10-250MK	#12-10 [4,0-6,0]	.250 X .032 [6,3 X 0,8]	YELLOW	.94 [24,0]	.51 [13,0]	.205 [5,2]

NOTES:

- FOR USE WITH:
 - STRANDED COPPER WIRE ONLY
 - 167°F (75°C) MAX TEMP RATING
 - 300V MAX VOLTAGE
- MATERIAL:
 - STAMPING: .016" (0.40) THK COPPER, NICKEL PLATED
 - HOUSING: VINYL
- INSTALLATION TOOLS: KST-2000C
- WIRE STRIP LENGTH $1\frac{1}{32}" \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [8,8mm $\begin{smallmatrix} +0.8 \\ -0 \end{smallmatrix}$]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- PARTS ARE RoHS COMPLIANT

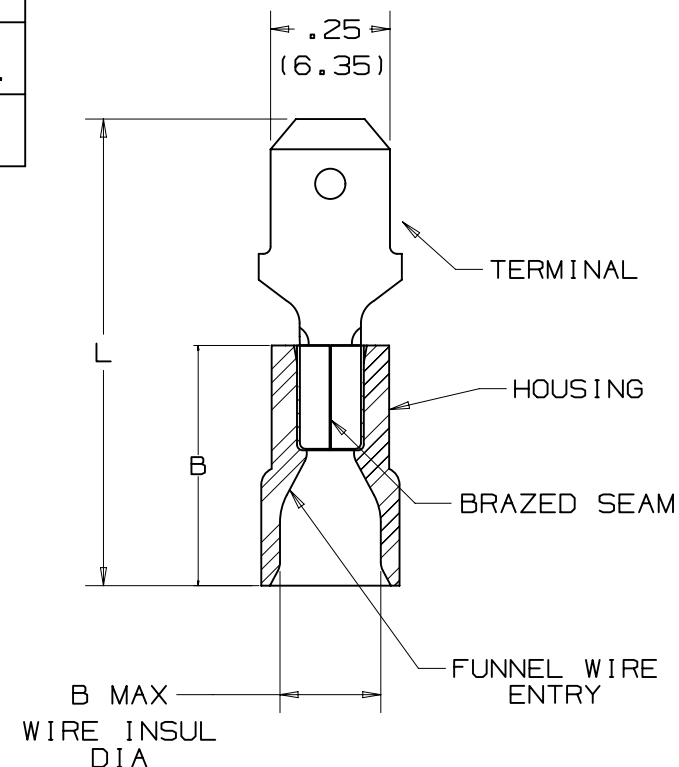

TITLE					
STRONGHOLD MALE DISCONNECT (250 SERIES) VINYL INSULATED, #12-10 AWG					
CUSTOMER DRAWING					
ITEM REVISION NAME	PANDUIT				
02937NDX/01					
DATASET FILE NAME					
02937NDX/01	MATERIAL:				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		SEE NOTES			
.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		DRAWING NUMBER:			
THIRD ANGLE PROJECTION		02937NDX-DC			
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JHNU	9/22	BDK	NTS		A