


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]					TOOLS
	ENGLISH	METRIC	L ± .03 [0,76]	W ± .01 [0,25]	C ± .02 [0,51]	M ± .03 [0,76]	H ± .01 [0,25]	
EV14-6FBK	#6	M3	.83 [21,0]	.28 [7,2]	.26 [6,5]	.39 [10,0]	.15 [3,70]	KST-2000A
EV14-8FBK	#8	M4	.83 [21,0]	.28 [7,2]	.26 [6,5]	.39 [10,0]	.17 [4,30]	
EV14-10FBK	#10	M5	.83 [21,0]	.31 [7.9]	.26 [6,5]	.39 [10,0]	.21 [5,30]	

NOTES:

1. FOR USE WITH:
 - A. 16-14 AWG [1,5-2,5 mm²]
SOLID OR STRANDED COPPER WIRE
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 - C. 600V. MAX. BLDG WIRE
(1000 V. MAX. IN SIGNS, FIXTURES & LUMINAIRES)
2. MATERIAL:
 - A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
 - B. HOUSING: VINYL, BLUE
3. WIRE STRIP LENGTH: 9/32" ^{+1/32}₋₀ [6,8mm ^{+0,8}₋₀]
4. SEE www.panduit.com FOR PACKAGE QUANTITIES
5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
6. PARTS ARE RoHS COMPLIANT

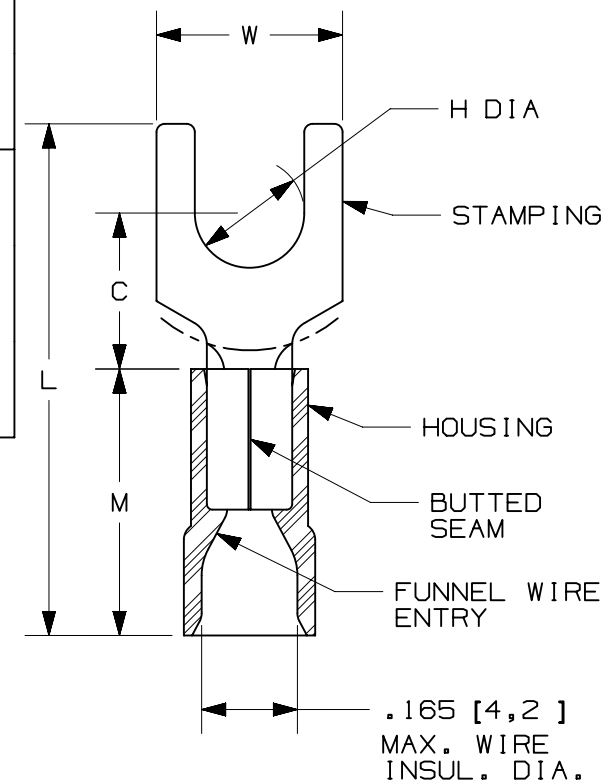

01	1/28/23	JHNU	JHNU	MRWA	REMOVED UL LISTING	128553
00	9/22	JHNU	BDK	JADE	DRAWING RELEASED	125831
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE					
STRONGHOLD FORK TERMINALS VINYL INSULATED, BUTTED SEAM #16-14 AWG					
CUSTOMER DRAWING					
ITEM REVISION NAME			PANDUIT TM		
02937NDR/01					
DATASET FILE NAME					
02937NDR-DC/01					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			MATERIAL:		
.X ± .XXX ± .XX ± ANGLES ±			SEE NOTES		
			THIRD ANGLE PROJECTION		
DRAWING NUMBER:			02937NDR-DC		
DRAWN BY	DATE	CHK	SCALE	SHEET 1 OF 1	SIZE A
JHNU	9/22	BDK	N.T.S.		