


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [ mm <sup>2</sup> ]	TAB SIZE INCH [ mm ]	HOUSING COLOR	DIMENSIONS in. [ mm ]			TOOLS
				L ± .03 [ 0,8 ]	W ± .02 [ 0,5 ]	MAX WIRE INSULATION DIA.	
EDNF10-250FIK	#12-10 [ 4,0-6,0 ]	.250 X .032 [ 6,3 X 0,8 ]	YELLOW	.94 [ 24,0 ]	.26 [ 6,6 ]	.236 [ 6,0 ]	KST-2000C

# NOTES:

- FOR USE WITH:
  - STRANDED COPPER WIRE ONLY
  - 300V MAX VOLTAGE RATING
  - 221°F (105°C) MAX TEMP RATING
- MATERIAL:
  - STAMPING - BRASS, TIN PLATED
  - HOUSING - NYLON
- WIRE STRIP LENGTH 11/32" [ 8.8 ]
- SEE [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX.
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- PARTS ARE RoHS COMPLIANT

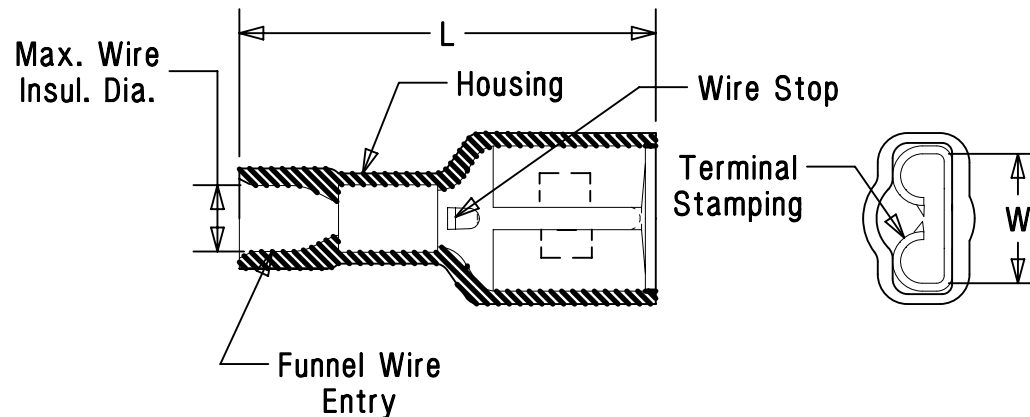

<b>TITLE</b> <b>STRONGHOLD FEMALE DISCONNECT (250 SERIES)</b> <b>FULLY INSULATED NYLON, #12-10 AWG</b> <b>CUSTOMER DRAWING</b>					
<b>ITEM REVISION NAME</b> 02937NDM/01					
<b>DATASET FILE NAME</b> 02937NDM/01					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ] .x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °				<b>MATERIAL:</b> SEE NOTES	
<b>THIRD ANGLE PROJECTION</b>				<b>DRAWING NUMBER:</b> <b>02937NDM-DC</b>	
<b>DRAWN BY</b> JHNU	<b>DATE</b> 9/30/22	<b>CHK</b> BDK	<b>SCALE</b> NTS	<b>SHT 1 OF 1</b>	<b>SIZE</b> A