

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]					TOOLS
	ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]	
EV10-6LFBK	#6	M3	.99 [25,2]	.33 [8,3]	.28 [7,0]	.51 [13,0]	.15 [3,7]	KST-2000A
EV10-8LFBK	#8	M4	.99 [25,2]	.33 [8,3]	.28 [7,0]	.51 [13,0]	.17 [4,3]	
EV10-10LFBK	#10	M5	.99 [25,2]	.35 [9,0]	.28 [7,0]	.51 [13,0]	.21 [5,3]	
EV10-14LFBK	1/4"	M6	1.24 [31,5]	.47 [12,0]	.47 [12,0]	.51 [13,0]	.25 [6,4]	

NOTES:

1. FOR USE WITH:

- A. #12-10 AWG [4,0-6,0 mm²] STRANDED COPPER WIRE
- B. 221°F [105°C] MAX. OPERATING TEMPERATURE
- C. 600 V. MAX. VOLTAGE RATING
(1000 V. IN SIGNS, FIXTURES & LUMINARIES)

2. MATERIAL:


- A. STAMPING: .04" [1,0] THK COPPER, TIN PLATED
- B. HOUSING: VINYL, YELLOW

3. WIRE STRIP LENGTH: 11/32" ^{+1/32}₋₀ [8,8mm ^{+0,8}₋₀]


4. SEE www.panduit.com FOR PACKAGE QUANTITIES

5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

6. PARTS ARE RoHS COMPLIANT

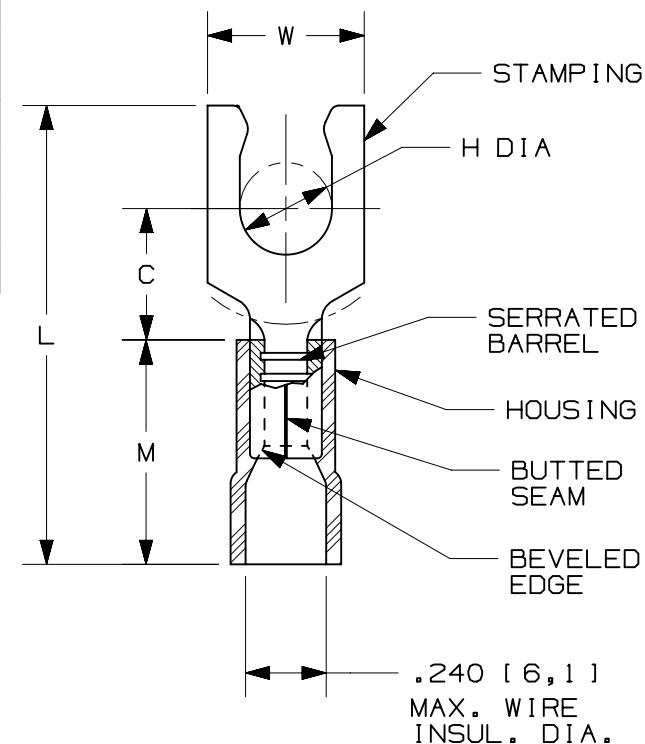

01	1/28/23	JHNU	JHNU	MRWA	REMOVED UL LISTING	128553
00	9/22	JHNU	BDK	JADE	DRAWING RELEASED	125831
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE				STRONGHOLD LOCKING FORK TERMINALS VINYL INSULATED, BUTTED SEAM #12-10 AWG	
ITEM REVISION NAME				CUSTOMER DRAWING	
02937NDT/01				PANDUIT TM	
DATASET FILE NAME					
02937NDT-DC/01				MATERIAL:	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				SEE NOTES	
<div><div>.X ±</div><div>.XX ±</div><div></div></div>				DRAWING NUMBER:	
THIRD ANGLE PROJECTION				02937NDT - DC	
DRAWN BY		DATE	CHK	SCALE	SIZE
JHNU		9/22	BDK	N.T.S.	SHEET 1 OF 1
					A