

2

1



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	WIRE RANGE AWG [ mm <sup>2</sup> ]	TAB SIZE INCH [ mm ]	COLOR	MAX. WIRE INSULATION DIAMETER	DIMENSIONS in. [ mm ]	
					L± .03 [ 0,8 ]	W± .01 [ 0,3 ]
EDV10-250K	#12-10 [ 4,0-6,0 ]	.250 X .032 [ 6,3 X 0,8 ]	YELLOW	.20 [ 5,2 ]	.93 [ 23,5 ]	.26 [ 6,6 ]

# NOTES:

- FOR USE WITH:
  - STRANDED COPPER WIRE ONLY
  - 167°F [75°C] MAX. OPERATING TEMP.
  - 300 V. MAX. VOLTAGE RATING
- MATERIAL:
  - STAMPING: BRASS, TIN PLATED
  - HOUSING: VINYL
- INSTALLATION TOOLS: KST-2000C
- WIRE STRIP LENGTH: 11/32" [ 8.8mm ]
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- PARTS ARE RoHS COMPLIANT

MAX. WIRE  
INSUL. DIA.  
(SEE CHART)

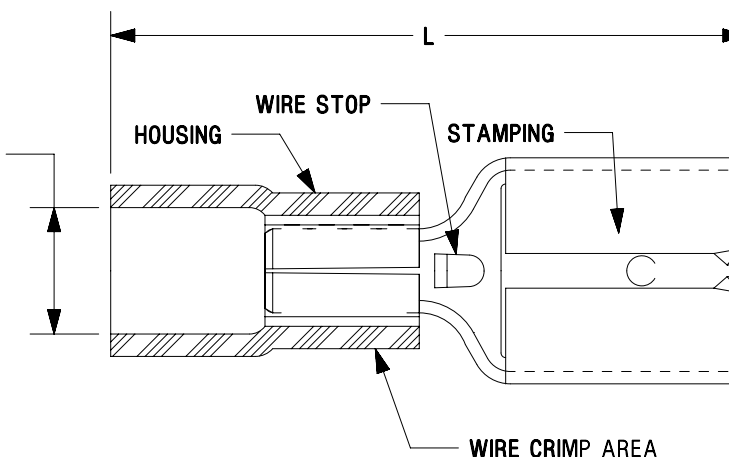

TITLE					
STRONGHOLD FEMALE DISCONNECTS (250 SERIES) VINYL INSULATED, METAL SLEEVE #12-10 AWG					
CUSTOMER DRAWING					
ITEM REVISION NAME			<b>PANDUIT</b> <sup>TM</sup>		
02937NDO/01					
DATASET FILE NAME			SEE NOTES		
02937NDO-DC/01					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]			DRAWING NUMBER: <b>02937NDO-DC</b>		
.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °					
			THIRD ANGLE PROJECTION		
DRAWN BY		DATE	CHK	SCALE	SIZE
JHNU		9/30/22	BDK	N.T.S.	SHEET 1 OF 1
					A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01	1/28/23	JHNU	JHNU	MRWA	REMOVED UL LISTING	128553
00	9/30/22	JHNU	BDK	JADE	DRAWING RELEASED	125831

2

1

2101000DA/12