


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]					TOOLS
	ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]	
EV18-6LFBK	#6	M3	.83 [21,0]	.25 [6,4]	.26 [6,5]	.39 [10,0]	.15 [3,7]	KST-2000A
EV18-8LFBK	#8	M4	.83 [21,0]	.28 [7,2]	.26 [6,5]	.39 [10,0]	.17 [4,3]	
EV18-10LFBK	#10	M5	.83 [21,0]	.32 [8,1]	.26 [6,5]	.39 [10,0]	.21 [5,3]	

NOTES:

- FOR USE WITH:
 - #22-18 AWG [0,5-1,0 mm²] STRANDED COPPER WIRE
 - 221°F [105°C] MAX TEMP. RATING
 - 600V MAX. BLDG WIRE
(1000 V MAX. IN SIGNS, FIXTURES & LUMINARIES)
- MATERIAL:
 - STAMPING: .03" [0,8] THK COPPER, TIN PLATED
 - HOUSING - VINYL, BLUE
- WIRE STRIP LENGTH: 9/32" ^{+1/32}₋₀ [6,8mm ^{+0,8}₋₀]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- PARTS ARE RoHS COMPLIANT

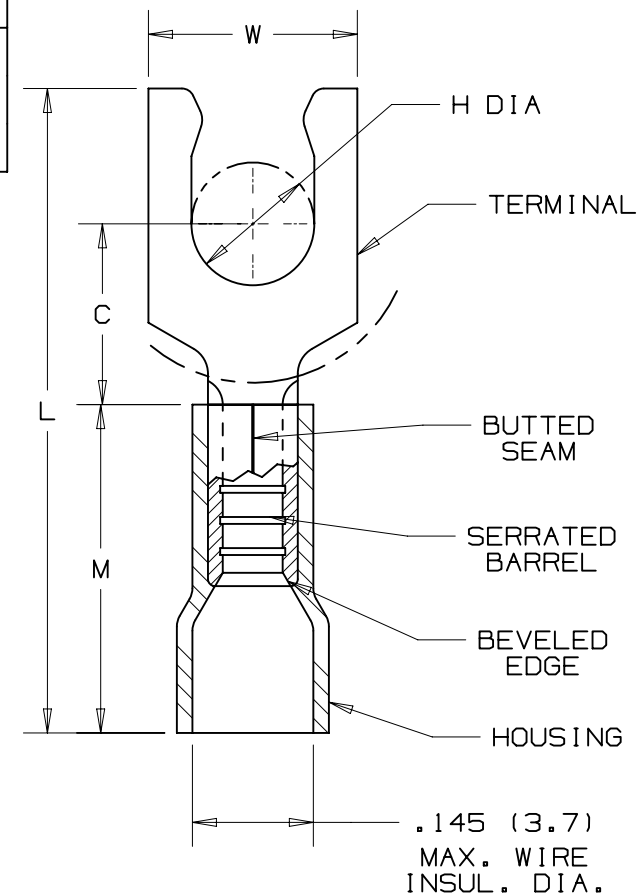

01	1/28/23	JHNU	JHNU	MRWA	REVISED WIRE RANGE: 22-18 WAS 22-16 REMOVED UL LISTING	128553
00	9/22	JHNU	BDK	JADE	DRAWING RELEASED	125831
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE				STRONGHOLD LOCKING FORK TERMINAL VINYL INSULATED, BUTTED SEAM #22-16 AWG	
				CUSTOMER DRAWING	
ITEM REVISION NAME		02937NDV/01		PANDUIT	
DATASET FILE NAME		02937NDV/01			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ±					