

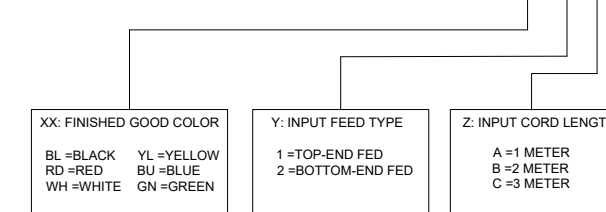




PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

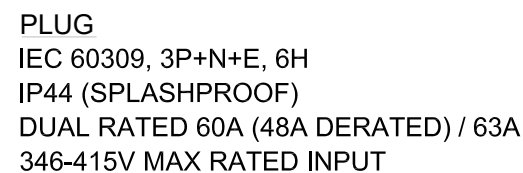

A



WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36G34G-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME:					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				N/A	
Tolerance(mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				DRAWING NUMBER: P36G34G-XXYZ_DC	
DRAWN BY NW	DATE 10/08/2023	CHK CSH	SCALE NONE	SHT 1 OF 2	
				SCALE B	



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36G34G	G6 MSPO PDU, 60AMP, (24)C13 (12)C19, IEC 60309 4P 5W 6H IP44-3M, TOP FED, BLACK	BLACK (9005)	3M (+254MM / -127MM) [10'(+10"/-5"')]	12.6kg

B

B

A

A

						WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT				
						TITLE INTELLIGENT SERIES PDU P36G34G-XXYZ CUSTOMER DRAWING						
						ITEM REVISION NAME:						
						DATASHEET FILE NAME:						
						UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR: N/A		
						Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0				DRAWING NUMBER: P36G34G-XXYZ_DC		
00A	10/08/2023	NW	CSH	MJD	INITIAL RELEASE	P36G34G-XXYZ		THIRD ANGLE PROJECTION				
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY NW	DATE 10/08/2023	CHK CSH	SCALE NONE	SHT 2 OF 2	SCALE B

