

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

1. STANDARD:

UNIT TYPE:	MONITORED OUTLET
ORIENTATION:	VERTICAL, 0U FULL, WIDE
OUTLET QTY&TYPE:	(24) C13, (12) C19
INPUT VOLTAGE:	200-240/346-415VAC
INPUT CURRENT:	32A
BREAKER QTY&TYPE:	(6) 16AMP, SINGLE-POLE
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	22.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 32A
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT
2. ADDITIONAL:


THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE
WITH ANY LEGACY CONTROLLERS
3. ACCESSORIES:

DOCUMENTATION KIT

PRODUCT SAFETY WARNING SHEET

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P36F13G-XX Y Z

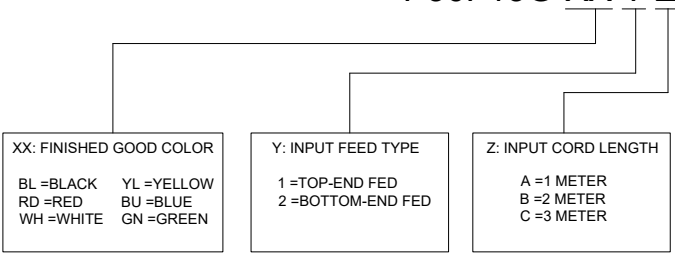

PLUG/RECEPTACLE BLOCK

	PLUG IEC 60309, 4P 5W, 6H IP44 (SPRINKLERPROOF) 32A, 346-415V MAX RATED INPUT
	RECEPTACLES IEC 60320/C19 16A, 250V MAX RATED OUTPUT
	RECEPTACLES IEC 60320/C13 10A, 250V MAX RATED OUTPUT

00A	09/21/2023	NW	CSH	MJD	INITIAL RELEASE	P36F13G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE: INTELLIGENT SERIES PDU P36F13G-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME:					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0	
DRAWING NUMBER:				P36F13G-XXYZ_DC	
DRAWN BY NW		DATE 09/06/2023		CHK CSH	
		SCALE NONE		SHT 1 OF 2	
				SCALE B	

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36F13G	G6 MPO PDU, 32AMP, (24) C13 (12) C19, IEC 60309 4P 5W 6H IP44-3M, TOP FED, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10'/-5"]	10.8kg

B

B

A

A

							WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY SIGN DATE PRINT
00A	09/21/2023	NW	CSH	MJD	INITIAL RELEASE	P36F13G-XXYZ	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	

TITLE:

INTELLIGENT SERIES PDU
P36F13G-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE
PROJECTION

Tolerance(mm)

0<L<50 ±0.5

50<L<250 ±1.0

250<L<500 ±1.5

500<L<1000 ±2.5

1000<L<2000 ±4.0

MATERIAL/COLOR:

N/A

DRAWING NUMBER:

P36F13G-XXYZ_DC

DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2	SCALE
NW	09/06/2023	CSH	NONE		

2



1