

PANDUIT P/N	WEIGHT
P24D43G-XXYZ	SEE SHEET 2


1. STANDARD:	
UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(12) C13, (12) C19
INPUT VOLTAGE:	200-240/346-415VAC
INPUT CURRENT:	32A
BREAKER QTY&TYPE:	(6) 16AMP, SINGLE-POLE
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	22.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 32A
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT


THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY
LEGACY CONTROLLERS


DOCUMENTATION KIT
PRODUCT SAFETY WARNING SHEET

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P24D43G-XX Y Z

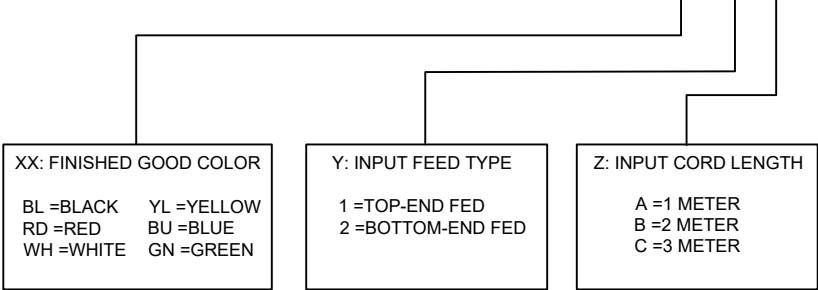


WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN	
				DATE	
				PRINT	
TITLE					
INTELLIGENT SERIES PDU P24D43G-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME:					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				N/A	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0				DRAWING NUMBER: P24D43G-XXYZ_DC	
DRAWN BY	DATE	CHK	SCALE	SCALE	
LWB	09/01/2023	SEAN	NONE	SHT 1 OF 2	
				B	

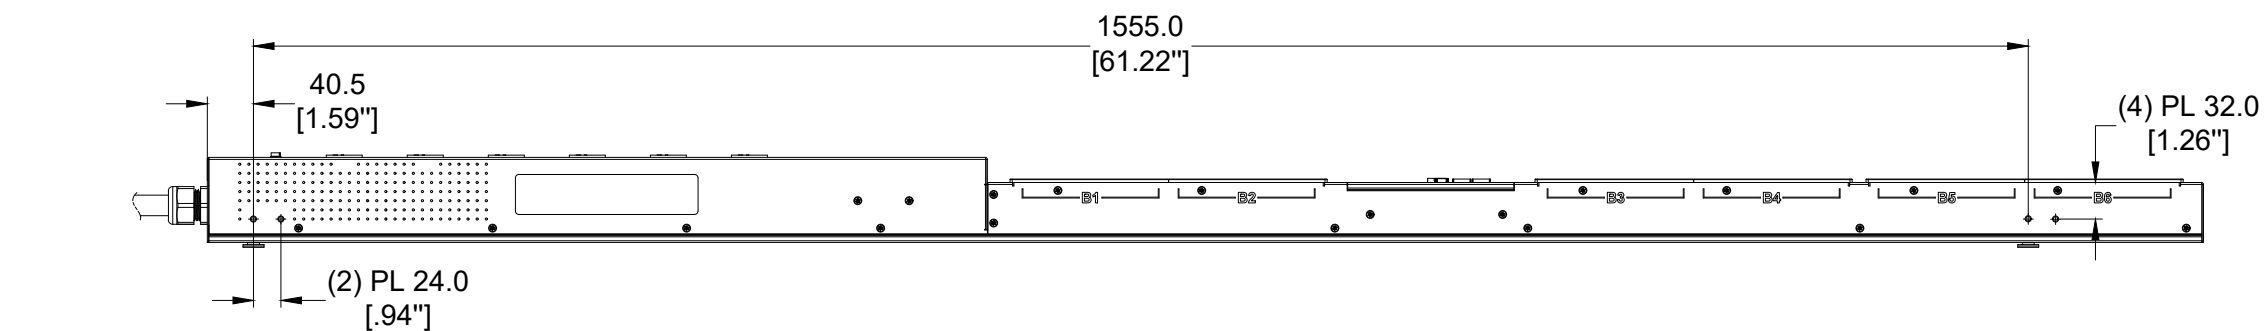


LEFT VIEW

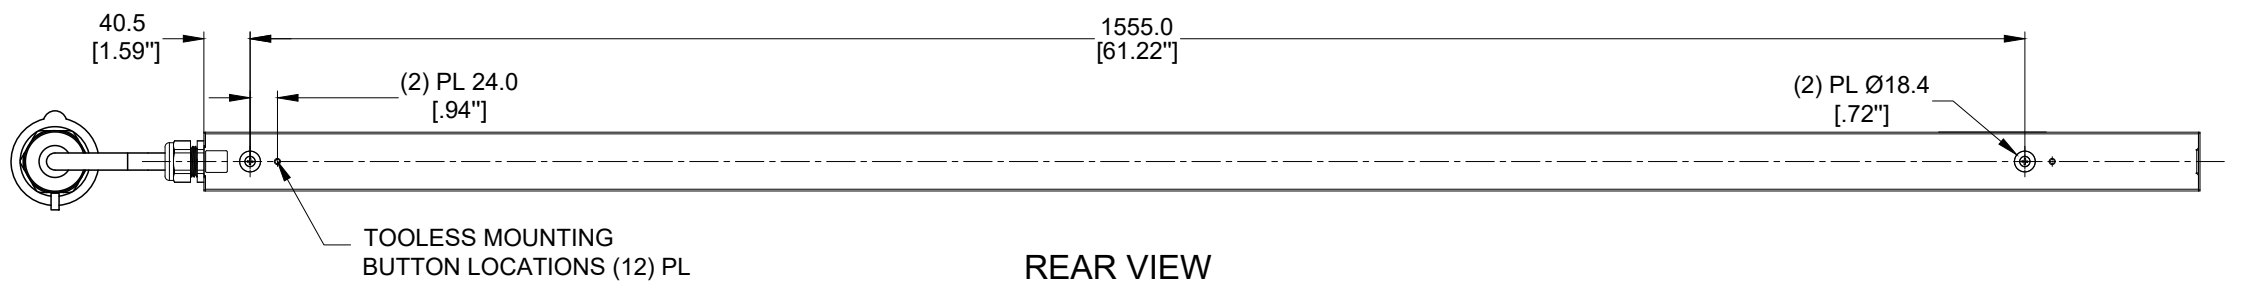


REAR VIEW

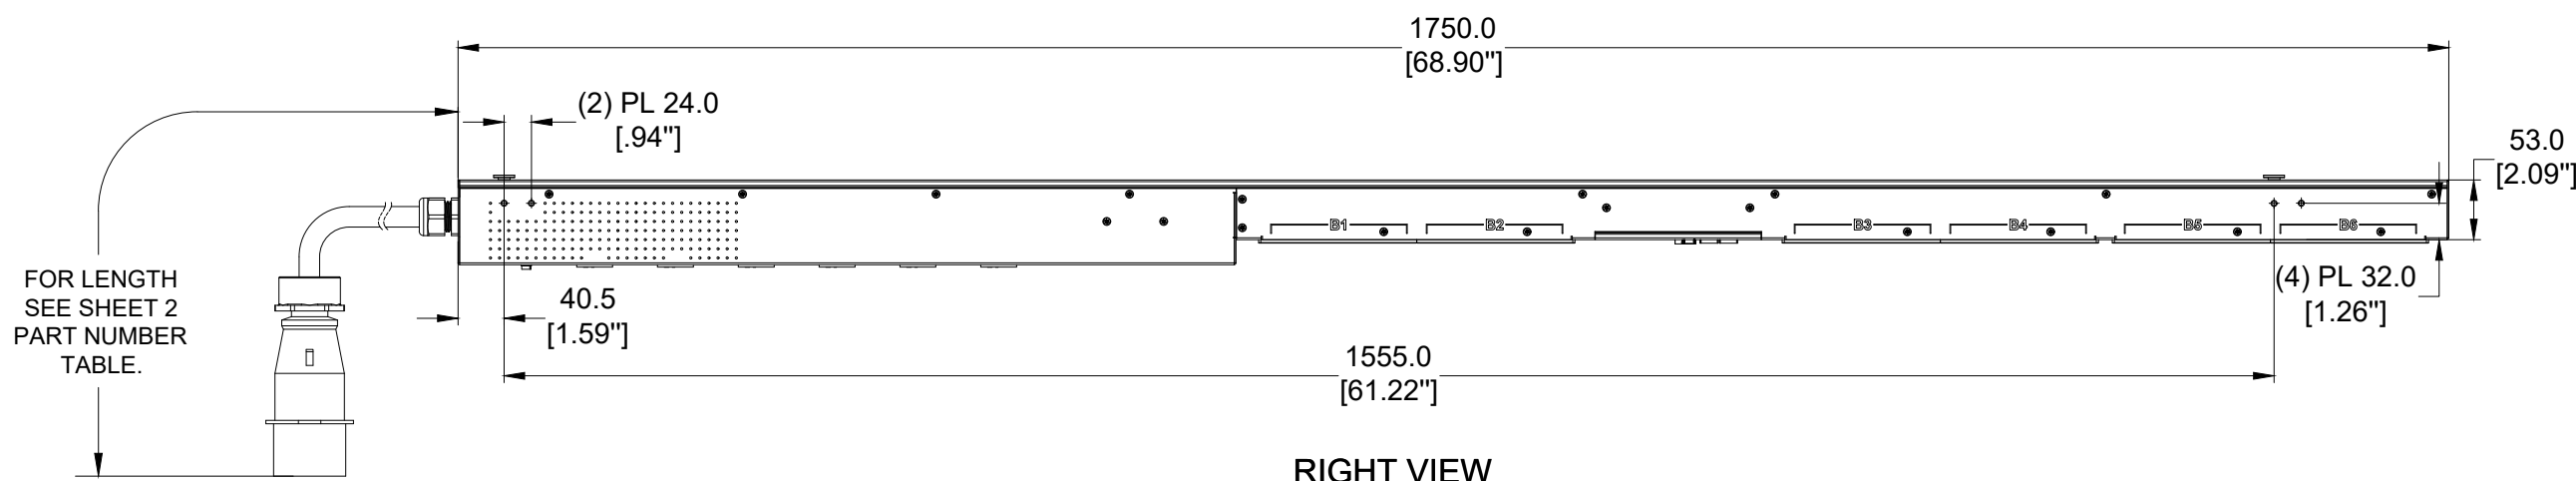

RIGHT VIEW

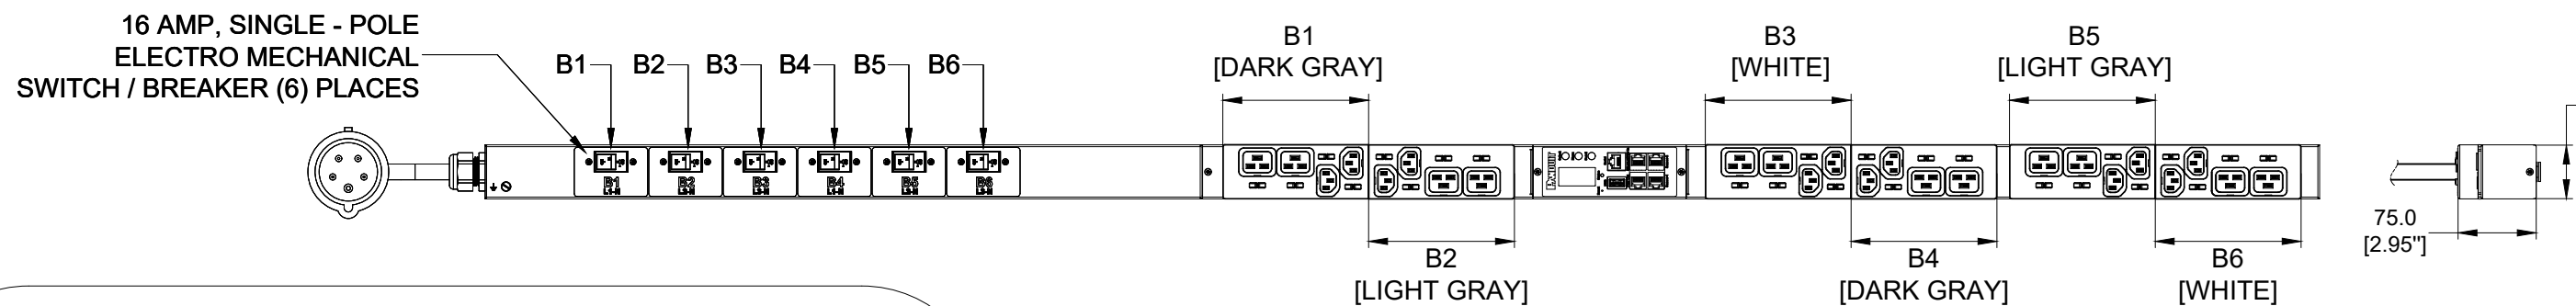

BOTTOM VIEW

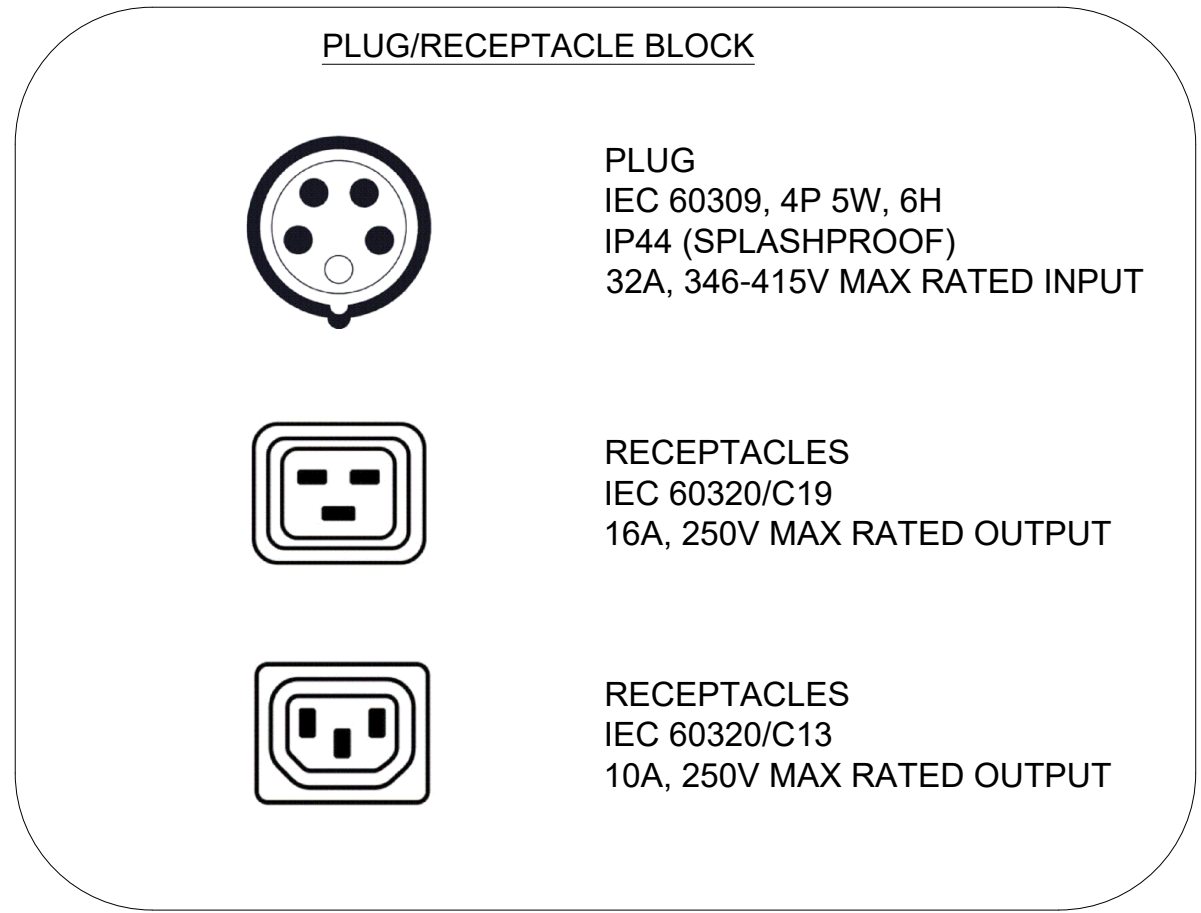

00A	09/01/2023	LWB	CSH	MJD	INITIAL RELEASE
REV	DATE	BY	CHK	APR	DESCRIPTION

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24D43G	G6 MI PDU,32AMP,(12) C13,(12) C19,IEC 60309 4P 5W 6H IP44-3M, TOP FED,BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10'/-5']	7.9kg

B



A

B



A

						WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
						TITLE		INTELLIGENT SERIES PDU P24D43G-XYZ CUSTOMER DRAWING	
						ITEM REVISION NAME:			
						DATASHEET FILE NAME:			
						UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:	
						Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A	
								DRAWING NUMBER:	
						THIRD ANGLE PROJECTION		P24D43G-XYZ_DC	
						DRAWN BY		SCALE	
						LWB		NONE	
						DATE		SHT 2 OF 2	
						09/01/2023		B	
						CHK			
						SEAN			
						SCALE			
						NONE			
						REV			
						DATE			
						BY			
						LWB			
						CHK			
						CSH			
						APR			
						MJD			
						INITIAL RELEASE			
						P24D43G-XYZ			

2



1