


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

1. STANDARD:
 - UNIT TYPE: MONITORED OUTLET
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (30)C13, (6) C19
 - INPUT VOLTAGE: 200-240/346-415VAC
 - INPUT CURRENT: 16A
 - BREAKER QTY & TYPE: N/A
 - INPUT PHASE: THREE-PHASE, WYE
 - RATED POWER: 11.0 kVA
 - INPUT PLUG: IEC 60309 3P+N+E 6H 16A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL:
 - THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS
3. ACCESSORIES:
 - DOCUMENTATION KIT
 - PRODUCT SAFETY WARNING SHEET

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P36F12G-XX Y Z

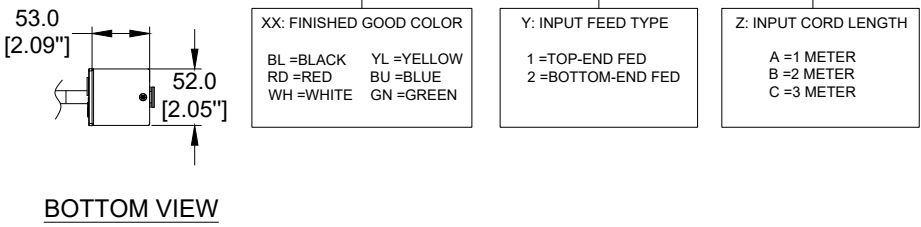

PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPLASHPROOF)
16A, 346-415V MAX RATED INPUT




RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

00A	09/18/2023	NW	CSH	MJD	INITIAL RELEASE	P36F12G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36F12G-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME:					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0	
DRAWING NUMBER:				N/A	
P36F12G-XXYZ_DC				SCALE	
DRAWN BY NW		DATE 09/18/2023		SHT 1 OF 2	
CHK CSH		SCALE NONE		B	



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36F12G	G6 MPO PDU, 16AMP, (30) C13 (6) C19, IEC 60309 4P 5W 6H IP44-3M, TOP FED, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	7.8kg

B

B

A

A

							WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT			
							TITLE INTELLIGENT SERIES PDU P36F12G-XXYZ CUSTOMER DRAWING					
							ITEM REVISION NAME:					
							DATASHEET FILE NAME:					
							UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:			
							Tolerance(mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0		N/A			
00A	09/18/2023	NW	CSH	MJD	INITIAL RELEASE	P36F12G-XXYZ	THIRD ANGLE PROJECTION		DRAWING NUMBER: P36F12G-XXYZ_DC			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY NW	DATE 09/18/2023	CHK CSH	SCALE NONE	SHT 2 OF 2	SCALE B

