

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

**SPECIFICATION:**







- STANDARD:
  - UNIT TYPE: MONITORED & SWITCHED PER OUTLET
  - ORIENTATION: VERTICAL, 0U FULL, WIDE
  - OUTLET QTY & TYPE: (38) C13, (6) C19
  - INPUT VOLTAGE: 200-240VAC
  - INPUT CURRENT: 32A
  - BREAKER QTY & TYPE: (2) 16AMP, SINGLE-POLE
  - INPUT PHASE: SINGLE-PHASE
  - RATED POWER: 7.4kVA
  - INPUT PLUG: IEC 60309 2P+E 6H
  - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
  - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL:
  - THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS
- ACCESSORIES:
  - DOCUMENTATION KIT
  - PRODUCT SAFETY WARNING SHEET

**NOTES:**

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [ INCHES ] .
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

**IDENTIFICATION**

FOR FINISHED GOOD P5  
ART NUMBER & DESCRIPTION TABLE SEE  
SHEET 2 CONFIGURABLE PART NUMBERS: **P44G14G-XX Y Z**

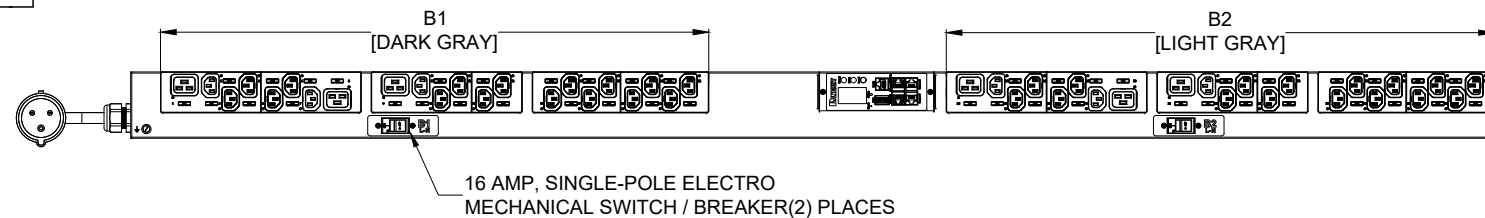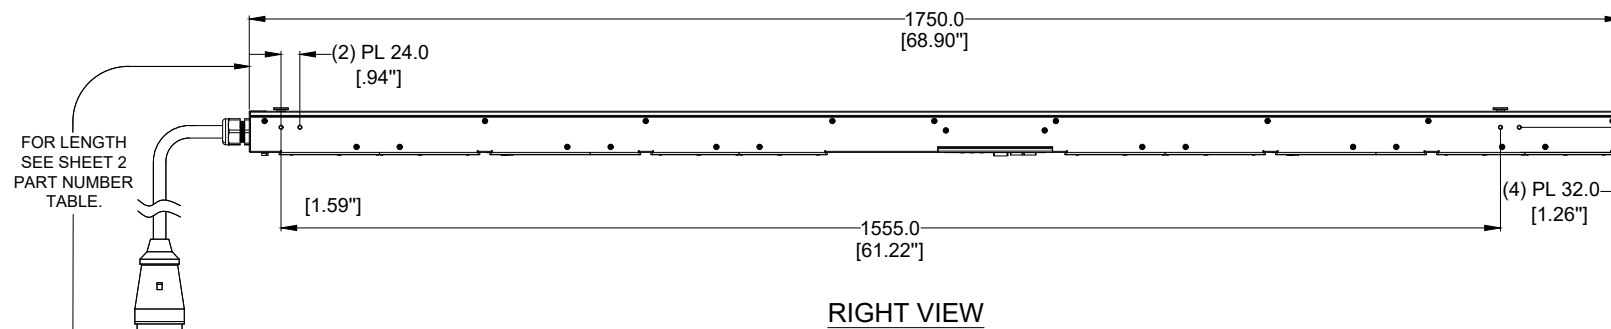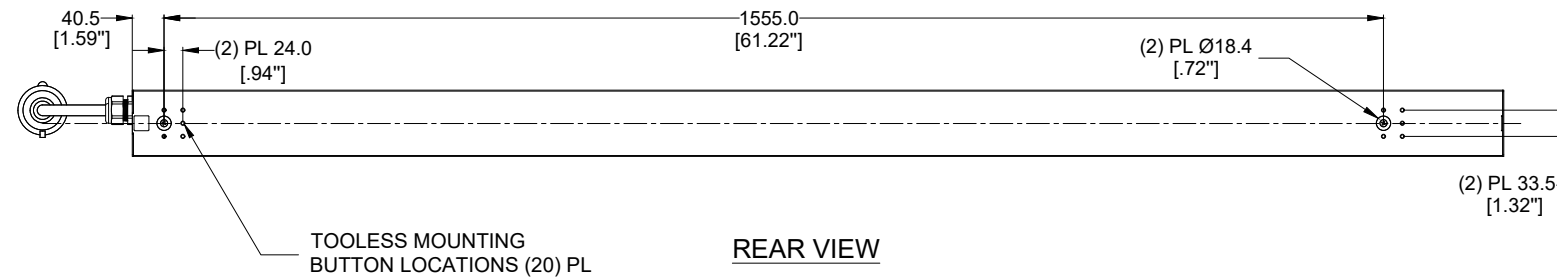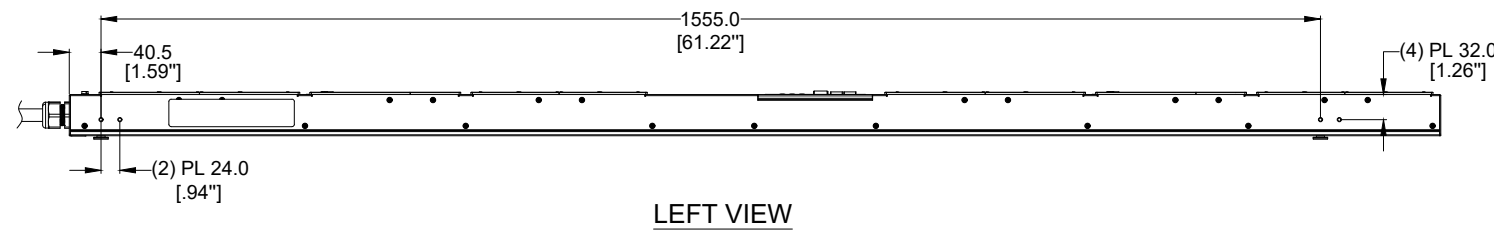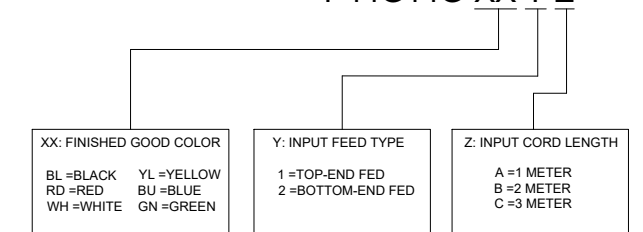

**BOTTOM VIEW**

**FRONT VIEW**

00A	09/26/2023	CCQ	CSH	MJD	INITIAL RELEASE	P44G14G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE: INTELLIGENT SERIES PDU P44G14G-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		<b>PANDUIT</b>
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P44G14G-XXYZ_DC
THIRD ANGLE PROJECTION		
DRAWN BY: CCQ	DATE: 09/26/2023	CHK: CSH
SCALE: NONE		
SHT 1 OF 2		SCALE: B

**PLUG**  
IEC 60309, 2P 3W, 6H  
IP44 (SPASHPROOF)  
32A, 200 - 250V MAX RATED INPUT

**SIX (6)  
RECEPTACLES**  
IEC 60320/C19  
16A, 250V MAX RATED OUTPUT

**THIRTY-EIGHT (38)  
RECEPTACLES**  
IEC 60320/C13  
10A, 250V MAX RATED OUTPUT

